# CLEAN DEVELOPMENT MECHANISM SIMPLIFIED PROJECT DESIGN DOCUMENT FOR SMALL-SCALE PROJECT ACTIVITIES (SSC-CDM-PDD) Version 02

### **CONTENTS**

- A. General description of the <u>small-scale project activity</u>
- B. Baseline methodology
- C. Duration of the project activity / <u>Crediting period</u>
- D. <u>Monitoring methodology</u> and plan
- E. Calculation of GHG emission reductions by sources
- F. Environmental impacts
- G. Stakeholders comments

### Annexes

- Annex 1: Information on participants in the project activity
- Annex 2: Information regarding public funding
- Annex 3: Stakeholder information

### Revision history of this document

Version Number	Date	Description and reason of revision
01	21 January 2003	Initial adoption
02	8 July 2005	<ul> <li>The Board agreed to revise the CDM SSC PDD to reflect guidance and clarifications provided by the Board since version 01 of this document.</li> <li>As a consequence, the guidelines for completing CDM SSC PDD have been revised accordingly to version 2. The latest version can be found at <a href="http://cdm.unfccc.int/Reference/Documents">http://cdm.unfccc.int/Reference/Documents</a>&gt;.</li> </ul>





page 3

### SECTION A. General description of the small-scale project activity

### A.1. Title of the small-scale project activity:

>>

Tugela Mill Fuel Switching Project Version 2, 18 July 2006

### A.2. Description of the small-scale project activity:

>>

Currently, thermal energy produced for use at the Tugela Pulp and Paper Mill is supplied by coal fired boilers. Specifically, coal fired boilers are used at Tugela Mill to generate steam used for the production of pulp and linerboard. During the production of this pulp and linerboard, the mill generates 70,000 tonnes of bark per year which causes disposal problems, and the bark is currently landfilled as solid waste. The bark comes from the debarking of timber used for the production of pulp and paper products. The timber used is grown in a sustainable manner in certified plantation forests owned by both Sappi and third party operators. The landfill site where this waste bark is currently disposed of is registered with the National government (Department of Water Affairs and Forestry) and has a finite lifespan. Reducing the inputs of bark into the landfill will result in climate benefits, by reducing emissions of methane to the atmosphere, as well as reducing pressure on the capacity of the existing landfill.

The project activity will involve the conversion of a boiler to enable co-firing of biomass (bark), with coal at the Tugela Mill pulp and paper mill. Sappi will use the waste bark for steam generation in a biomass thermal energy boiler. The biomass will directly replace the current use of coal for steam production in the mill. Specifically, the project consists of the complete replacement of the boiler bed and fuel feed conveyor system at the number 10 coal fired boiler to a biomass-fired fluidised bed boiler. The thermal capacity of the new boiler is rated at 22 MWth, and is therefore applicable under the small-scale CDM guidelines (i.e. below 15MW equivalent).

The proposed project activity will, after implementation, result in a reduction of coal consumption due to the increased utilization of biomass as fuel for on-site thermal energy production. The biomass will be used as an alternative fuel offsetting emissions from non-renewable resources (coal) that would have been used in the absence of the project activity. The resulting emission reductions will be monitored and verified against the proposed project activity baselines.

The proposed project activity is comprised of two components:

- Recovery of biomass that consists of fines, wood chips, bark etc. presently being landfilled at a local registered site.
- Utilization of the biomass in a co-fired (biomass and coal) power boiler as an alternative fuel to coal to generate thermal energy and steam at Tugela Mill.

The project contributes to sustainable development through the reduction of fossil fuel use, which in turn reduces local air pollution and other environmental impacts associated with the burning of coal.





page 4

Apart from emission reductions due to the substitution of coal by biomass, the expected benefits from the project include:

- The prevention of CH<sub>4</sub> (methane) emissions from landfilled biomass waste;
- Emissions from transportation of coal from Mpumalanga Province via road and rail (approximately 1000 km round trip) will be reduced;
- The multiplier effect of this investment is likely to bring additional benefits such as the long-term sustainability of the mill, and thus economic improvement in the area where the project is located;
- The project will act as a clean technology demonstration project, encouraging development of similar biomass projects throughout South Africa; and
- Demonstrates the use of a new mechanism for funding environmentally friendly technologies, in this case, a mechanism (CDM) which reduces emissions of greenhouse gases;

The emission reductions from methane avoidance (or other emissions mentioned above) will not be claimed as part of this project, thus making the project "conservative" overall.

### A.3. Project participants:

>>

### **Table A.1 - Project Participants**

Name of Party involved*	Private and/or public entity (ies) project participants (as applicable)	Kindly indicate if the Party involved wishes to be considered as project participant (Yes/No)
South Africa	Sappi Kraft (Pty ) Ltd	No

<sup>(\*)</sup> In accordance with the CDM modalities and procedures, at the time of making the CDM-PDD public at the stage of validation, a Party involved may or may not have provided its approval. At the time of requesting registration, the approval by the Party(ies) involved is required.


### A.4. Technical description of the small-scale project activity:

>>

The project involves a fuel switch from coal to biomass at a boiler in the Tugela Mill. The Tugela Mill is an integrated unbleached kraft and semi-chemical pulp and kraft paper mill producing pulp for own consumption (350 000 t/a). The pulp is used to produce kraft linerboard, corrugated medium (300 000 t/a), and other kraft packaging (90 000 t/a). See flowchart (Figure 1.) below for an overview of the entire mill process.

<sup>\*</sup>Please note that Sappi Manufacturing (Pty) Ltd is the parent company of Sappi Kraft (Pty Ltd)

Figure A.1. Tugela Mill Process

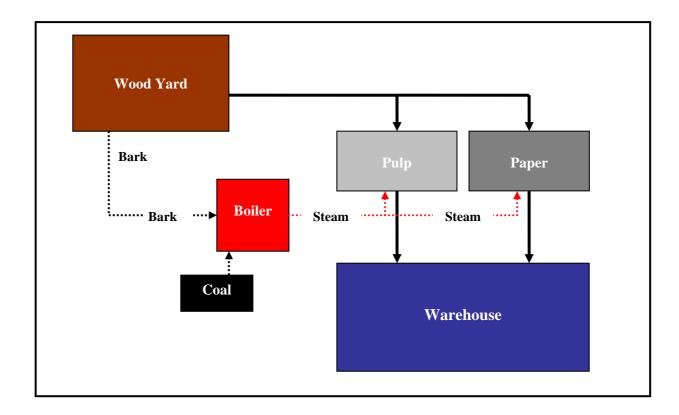

The technical changes that will be made in order to implement the biomass fuel switch include:

- removal of chain grate and stokers,
- installation of new fluid bed combustor,
- start-up burners and bed management system,
- modifications to rear furnace wall tubes, refractories, casing, and framing.
- installation of a new bark conveying system, and
- installation of cyclonic wet gas scrubber and water recycling

Fluid bed boiler combustion technology, the principal element of this boiler conversion, is a tried and tested technology. It has been employed in similar applications in the pulp & paper industry internationally.

Table A.2 below presents details on the key equipment involved in the project.



Table A.2 - Technical Details of Boiler Equipment

Item	Equipment	Manufacturer	Thermal Capacity	Steam Pressure
1	Bark Infeed System	Babcock	N/A	N/A
2	Bark Bin	Babcock/Raumaster	N/A	N/A
3	Bark Screw feed to Boiler	Babcock/Raumaster	N/A	N/A
4	Fluidised bed combustor	Babcock	22MW	1400 kPa
5	FD fan/ducting	Babcock	N/A	N/A
6	Wet Scrubber	Babcock	N/A	N/A
7	ID FAN/ducting/stack	Babcock	N/A	N/A

Tugela Mill discards its woodwaste together with other waste, mainly boiler ash, in its own landfill site. Due to the increased pulp production of the Mill over the past few years, the quantities of waste discarded have increased substantially and reduced the lifespan of the landfill site. Previous investigations showed that if all waste is used for landfill, it would result in a lifespan of 20 years compared to 40 years if it is combusted.

The landfill is located immediately adjacent to the Mill. It is constructed at an incline so as to manage leachate runoff, which is collected and sprayed back onto the landfill. Currently the waste is layered and capped The site is permitted, regulated and monitored by the Department of Water Affairs and Forestry and independent third party auditors in accordance with permit requirements. After compaction the annual space requirement is 300 000m<sup>3</sup>.

### A.4.1. Location of the small-scale project activity:

### A.4.1.1. Host Party(ies):

>>

South Africa

### A.4.1.2. Region/State/Province etc.:

>>

Ndondakasuka Municipality (District of Dukusa)

### A.4.1.3. City/Town/Community etc:

>>


Mandini

A.4.1.4. Detail of physical location, including information allowing the unique identification of this small-scale project activity(ies):



The project will occur at the Tugela Mill in the town of Mandini, which is in the Province of Kwazulu Natal, South Africa. The mill is located on the northern bank of the Tugela River about 10 km's inland from the coast and approximately 100 km north from the city of Durban.

Figure A.2. Map of South Africa and Project Activity location.

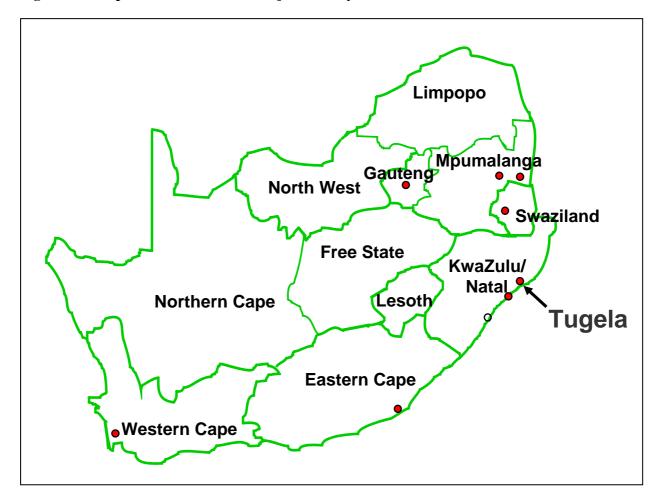

### A.4.2. Type and category(ies) and technology of the small-scale project activity:

>>

According to Appendix B of Simplified modalities and procedures for small scale CDM projects version 08, of 03 March 2006, the project activity is type AMS- I.C ("Thermal Energy for the User")

The project involves the conversion of a 17.04 MWth capacity coal fired boiler into a biomass fired boiler. The coal based boiler currently generates at 22 tonnes of steam per hour at a pressure of 14bar. Projections and the forecast of maximum demand, indicate that the capacity of the power plant will be rated at 21.68 MWth. This is less than the maximum allowed capacity of 45MWth assigned to the corresponding project type AMS- I.C ("Thermal Energy for the User").





page 8

A.4.3. Brief explanation of how the anthropogenic emissions of anthropogenic greenhouse gas (GHGs) by sources are to be reduced by the proposed <u>small-scale project activity</u>, including why the emission reductions would not occur in the absence of the proposed <u>small-scale project activity</u>, taking into account national and/or sectoral policies and circumstances:

>>

The projected start date for the project is January 1, 2007, and will replace a boiler which consumes only coal with a boiler which will primarily utilize biomass, with a constant small use of coal in a fixed ratio (coal use will likely occur mainly during start-up, where capacity can be increased on the boiler and periods where there are any biomass supply problems). Any coal consumption equivalent will be recorded and monitored in accordance with the monitoring and measurement plans. The proposed project activities will, after implementation, result in a reduction of coal consumption due to the utilization of biomass for on-site thermal energy production. The proposed activity will directly reduce greenhouse gas (GHG) emissions from existing and future steam generation from fossil fuels.

The baseline scenario would be the continued use of coal to generate steam for the Tugela Mill. This project will displace the use of coal for steam generation with a renewable carbon neutral alternative, namely biomass (bark). The biomass source utilized in the project activity is renewable as it is derived from sustainable plantation forests.

In accordance with Sappi's Environmental policies no indigenous trees or trees from controversial sources (i.e. socially, environmentally or economically) –are used in the production of Sappi's products. The timber is grown on a commercial basis from pine and eucalypt species specifically for pulp production. A certified management system is employed at all operations which covers all three pillars of sustainable development. All of Sappi's timber is sourced from sites that are registered with the South African Department of Water Affairs and Forestry. Importantly, the proposed Tugela CDM Project will not rely upon plantation forests specifically grown for use as fuel but rather upon existing plantation forest grown for the production of pulpwood for the Mill. Much of the timber sourced is purchased from previously disadvantaged, rural community farmers (refer to 2004 Sappi SD report – www.sappi.com)

Furthermore, the formation of CH<sub>4</sub> (methane) emissions from the component of the biomass waste stream, which is currently landfilled and CO<sub>2</sub> emissions from the transportation of biomass to the landfill site and coal to the Mill will be avoided. As the combustion of renewable biomass is considered carbon neutral, the project activity has no GHG emissions compared to the emissions from the coal boiler, which constitutes GHG emissions in the baseline. Details are provided in section B.

Biomass diverted from the landfill will replace coal as fuel in one power boiler that provides thermal energy to the operations. The reduction, or potentially elimination of, coal used in the boiler will reduce GHG emissions.

When calculating the boiler output, including the calorific value (CV) of the biomass, the efficiency of the boiler and the combustion of the biomass, the boiler is rated 21.68 MWth equivalent of thermal power in the biomass boiler. This is below the 45MW for cogeneration projects requirement for small-scale Type 1.C. The steam produced by the boiler is used solely for the provision of process heat for the pulp and paper mill.



### A.4.3.1 Estimated amount of emission reductions over the chosen crediting period:

>>

The Project activity will reduce GHG emissions by 55,912 tonnes of CO<sub>2</sub> per year, totalling 391,384 tonnes of CO<sub>2</sub> during the initial 7-year crediting period.

Table A.3. Estimated amount of emission reductions

Please indicate the chosen crediting period and provide the total estimation of emission reductions as well as annual estimates for the chosen crediting period. Information on the emissions reductions shall be indicated using the following tabular format.

For type (iii) small-scale projects the estimation of project emissions is also required.

Years	Annual estimation of emission reductions in
	tonnes of CO <sub>2</sub> e
2007	55,912
2008	55,912
2009	55,912
2010	55,912
2011	55,912
2012	55,912
2013	55,912
*After the initial 7-year crediting period, the	
baseline will be reassessed, generating a new	
estimate of emissions reductions yet to be	
determined.	
Total estimated reductions (tonnes of CO <sub>2</sub> e)	391,384
Total number of crediting years	7 (renewable up to 21 years)
Annual average over the crediting period of	
estimated reductions (tonnes of CO2 e)	55,912

### A.4.4. Public funding of the small-scale project activity:

>>

The project will not receive any public funding from Parties included in Annex I of the UNFCCC

# A.4.5. Confirmation that the <u>small-scale project activity</u> is not a <u>debundled</u> component of a larger project activity:

>>

This small scale fuel switch project is not part of a larger emission-reduction project given that this is a unique CDM project proposed by Sappi on the east coast of South Africa.





page 10

According to *Appendix C* to the Simplified Modalities and Procedures for small scale CDM project activities, the project is not part of a larger CDM project activity. There is no registered small-scale CDM project activity or an application to register another small-scale CDM project activity:

- With the same project participants;
- In the same project category and technology/measure;
- Registered within the previous 2 years; and
- Whose project boundary is within 1 km of the project boundary of the proposed small-scale activity at the closest point.

Therefore, this project is not a debundled component of a larger project activity.

### **SECTION B.** Application of a baseline methodology:

# B.1. Title and reference of the <u>approved baseline methodology</u> applied to the <u>small-scale project</u> <u>activity:</u>

>>

The project activity is applicable to small-scale project type I.C. - Thermal Energy for the User:

Methodology AMS-I.C., -Thermal Energy for the User

From *Appendix B* of Simplified Modalities and Procedures for small scale CDM projects version 8, 03 March 2006.

### B.2 Project category applicable to the small-scale project activity:

>>

The methodology for the Tugela CDM Project is based on Type AMS I.C -"Thermal Energy for the User"

The project meets all of the applicable requirements included in AMS-I.C. This category comprises "Renewable Energy Projects". The project involves the conversion of a coal fired 17.04 MWth capacity boiler to a co-fired (biomass and coal) boiler with a 21.68 MWth capacity. Thus, the project involves a boiler with a capacity which is less than the maximum allowed capacity of 45MWth assigned to the corresponding project type AMS-I.C.

The choice of applicable baseline calculation for the project category is justified since the project activity meets the following applicability conditions:

Table B.1. - Methodology AMS-I.C. Requirements

Project Type	Type I-Renewable Energy Project	
Project Category	I.C. Thermal Energy for the User	
This category comprises renewable energy technologies to individual households or users with thermal energy that displaces or non-renewable sources of biomass. Upgrading of existing equipallowed. Biomass-based co-generating systems that produce electricity for use on-site are included in this category.		
	Applicable to the Tugela CDM project:  For co-generation systems and/or co-fired systems to qualify under this category, the energy output shall not exceed 45 MWth. E.g., for a biomass based co-generating system the capacity for all the boilers affected by the project activity combined shall not exceed 45 MWth. In the case of the co-fired system the installed capacity (specified for fossil fuel use) for each boiler affected by the project activity combined shall not exceed 45 MWth.	
Boundary	The physical, geographical site of the renewable energy generation delineates the project boundary.	
Baseline	For renewable energy technologies that displace technologies using fossil fuels, the simplified baseline is the fuel consumption of the technologies that would have been used in the absence of the project activity times an emission coefficient for the fossil fuel displaced. IPCC default values for emission coefficients may be used. Please see section E.	
Leakage	If the energy generating equipment is transferred to another activity, leakage is to be considered.  Applicable to the Tugela CDM project:  As no equipment is transferred to another activity in the Tugela project, leakage does not need to be considered.	
Monitoring	Metering the thermal and electrical energy generated for co-generation projects. In the case of co-fired plants, such as the Tugela CDM Project, the amount of fossil fuel input shall be monitored	

# B.3. Description of how the anthropogenic emissions of GHG by sources are reduced below those that would have occurred in the absence of the registered <u>small-scale</u> CDM <u>project activity</u>:

>>

The project activity involves a fuel switch to biomass at a boiler that historically utilized 100% coal. Under the business as usual scenario the boiler would continue to utilize coal, and thus have GHG emissions based on the utilization of coal. As will be demonstrated in the following steps, CDM revenue has been considered from the early stages of development of the project, and it is an integral part of the financial package of the project. Specifically, the boiler conversion has been presented as a potential CDM project as long ago as 2003. The Project Developer took the decision to implement the project after considering CDM benefits under the Kyoto Protocol.

Table B.2. Summary of the baseline scenario and the project scenario:

Baseline and CDM Project Scenarios					
Characteristics	Baseline Scenario	Project Scenario			
Operating boilers	Medium pressure, water tube,	Medium pressure, water tube,			
	moving-grate type coal fired	fluid bed type biomass fired			
	boiler	boiler			
Fuel Input	Coal	Biomass:			
		Significantly reduced amount of			
		coal (with a small amount of coal			
		used in a fixed ratio and possibly			
		during periods where there are			
		any biomass supply problems.)			

### Additionality:

The key to determining additionality of the project is to determine the baseline of thermal generation to the boiler and - related to that - the baseline management of the biomass that will be used to provide thermal energy for the boiler. In absence of the CDM project activity the most likely scenario would be the continued use of coal in the operation of the boiler. Key points below provide justification as to why the most likely scenario would be the continued use of coal:

- The continued use of coal is not regulated by national law, and is therefore legal, providing that all relevant air and water quality emission standards are met, which has been the case throughout the operational history of the plant;
- The coal boiler has a continued lifetime which is longer than the proposed CDM crediting period;
- This activity of coal use is standard for the industry;
- The technology for the use of coal is an accepted technology, and continued operation of existing facilities presents no barriers.

Due to the main points listed above the continued use of coal is the most plausible baseline scenario.

Demonstration of why the Tugela Fuel Switch Project is additional is offered under the following categories of barriers: (a) Financial Barrier, (b) Technological Barrier, and (c) Prevailing Practice.

The first condition related to additionality is the demonstration of the absence of mandatory policy or regulations requiring the project activity (i.e. fuel switch). The project activity meets this first requirement, as there are no direct programs or regulations limiting the future use of coal, or initiatives that are mandatory requiring the use of biomass or limiting solid waste volumes. Furthermore, the use of biomass boilers is in compliance with all applicable legal and regulatory requirements in South Africa as long as all the local safety and pollution standards are met (the Tugela project meets these standards). Moreover, all of the relevant environmental licenses that Tugela Mill possesses do not present any requirements related to reducing air pollutants or more specifically, requirements for fuel switch to biomass.

#### a) Financial Barrier:

The thermal supply from biomass involved the installation of new equipment and an investment cost of approximately ZAR 27 million. CDM has been considered from an early stage and it is an integral part of the financial package of the proposed project activity. There are several financial factors that constrain the ability of the project developer to undertake this project without the additional revenue from carbon finance. These are presented below.

- 1. In order to replace the current coal-fired boiler with a biomass-fired boiler the unit must be shut down for between 3 to 5 months. Consequently the pulp and paper production processes at this boiler will be interrupted, thus reducing the overall mill production and profitability.
- 2. The most practical and economically viable option is to continue operating the boiler in its current configuration (i.e. a coal fuelled boiler) and increase the landfill infrastructure at a future date. An analysis in 2000 recommended the "continued use of the woodwaste for landfill, and to follow the developments closely to be ready for an alternative solution, when the circumstances change." To date the only circumstance that has changed is the CDM process for which South Africa (a non-Annex I country) qualifies. The current configuration of the boiler is still an economically viable alternative and there is no clear financial reason to convert the existing coal fired boiler to any other (biomass included) configuration and there is no reason to assume any other change in circumstances in the foreseeable future.
- 3. The landfill site and surrounding land is owned by Sappi, but an independent waste management contractor is contracted in to manage the site on Sappi's behalf. There are a number of contractual obligations regarding the volume of waste that will now be impinged upon. Sappi may need to compensate the contractor for the contractual obligations that have been breached. This may also affect future contractual negotiations. The landfill site is an approved multi-cell site that has no significant lifespan constraints and at current conditions will exceed 25 years life. So a reduction will extend this significantly. This is not a constraint on the BAU case.

The designation of the project as a CDM activity, and the attendant benefits and incentives derived from the project activity, will help alleviate these investment barriers and thus enable the project to be undertaken. The financial benefit from the revenue obtained by selling the CO<sub>2</sub> emissions reductions is one of the main drivers that encouraged the developer to invest in the proposed project activity.

### b) Technological Barrier:

Sappi and its associated personnel will be responsible for the operation and maintenance of the biomass boiler, after design and supply by Babcock. Because of the nature of the feedstock, the biomass boiler will be more laborious to operate compared to the coal boilers, requiring more maintenance and the additional training of current staff. It is important to note that technology transfer for this project will occur not only through the purchase and manufacture of technology new to the Mill, but also through the training of Sappi managers, engineers, supervisors and operators. Contractors will also benefit from this project via their involvement in the construction and civil engineering component of the project. This additional form of technology transfer strengthens working relations and understanding among partners at various levels. It also enhances technology cooperation, as well as leads to tangible investments and development of local capacity.





page 14

### c) Prevailing Practice Barrier:

The Tugela Mill was commissioned in the early 1950's, and operates 9 coal-fired boilers, with the operation of coal-fired boilers is well established, Tugela Mill does not have any biomass boilers in operation. This would be a new practice for all involved at the mill. The conversion to biomass will incur higher maintenance and operational costs, such as biomass storage operations, biomass handling operations, increased maintenance scheduling and training of operators and maintenance technicians. Furthermore, it is important to note that the main business of Sappi is the production of pulp and paper, and the decision to perform the fuel-switch requires additional management effort and time, which detracts from normal operations. Prevailing practice within the South African pulp and paper industry is very similar with only 2 pulp companies in the country, Sappi & Mondi and the practice at Tugela is indicative of the national norms..

In summary, due to each of the barriers mentioned above, it has been demonstrated that the approval and registration of the project as a CDM activity, and the attendant benefits and incentives derived from the project activity, will alleviate the barriers indicated above and thus enable the project to be undertaken. The approval and registration of the CDM project activity will alleviate the identified barriers by providing additional revenue to the Tugela Mill from the sale of emission reductions. It can therefore be clearly demonstrated that the proposed CDM project activity is not the baseline scenario. Anthropogenic greenhouse gases will be reduced according to the calculations in the following sections, and these have been shown to be additional in accordance with international guidelines.

Projects such as the Tugela Mill boiler conversion assist CDM host countries in achieving multiple sustainable development objectives (economic development, improvement of local environmental quality, minimisation of risk to human health from local pollutants, and reduction of greenhouse gases). Further to direct project knowledge transfer, there will also be CDM knowledge transfer to various levels of Sappi personnel on the CDM processes (this is the first CDM project developed by Sappi) and local auditors whom are employed by designated operating entities (DOE's). The project will be the first CDM project attempted by Sappi as a global company and is viewed in some quarters with a certain degree of scepticism. A successful CDM project at Tugela Mill will go a long way to alleviating these concerns and lead to the initiation of future CDM projects in South Africa.

# B.4. Description of how the definition of the project boundary related to the <u>baseline methodology</u> selected is applied to the <u>small-scale project activity</u>:

>>

As stated in *Appendix B* for small-scale project activities, the project boundary for small-scale renewable energy projects is defined by the physical, geographical site of the renewable energy generation. The project boundary of the Tugela CDM Project activity encompasses the physical, geographical area of the Tugela Mill.

A brief description of all sources of baseline and project emissions appears below:

The baseline is defined as that which would have occurred in the absence of the project activity, which is the consumption of coal for the production of steam at the Tugela Mill. The baseline is based on the amount of CO<sub>2</sub> emissions as a result of the combustion of coal.

#### CDM-SSC-PDD (version 02)



CDM - Executive Board



page 15

Conforming to the guidelines and rules for small-scale project activities, the emissions related to production, transport and distribution of the fuel used in the power plants in the baseline are not included within the project parameters, as these do not occur within the project boundary. For the same reason, emissions related to the transport of coal are also excluded from the project boundary.

The activity of the proposed Tugela CDM Project is the generation of steam. This activity is under the control of the project developer and is to be included within the project boundary. The emissions related to biomass steam production are zero, as the fuel source is a renewable source of biomass. Aside from the relatively small amount of coal that will be used during the boiler start-up phase of the project where capacity can be increased on the boiler and periods where there are any biomass supply problems, no other direct on-site GHG emission sources have been identified. These emissions will be captured within the monitoring plan. Furthermore, the electricity used for the operation of the biomass conveyer is considered to be offset by the electricity otherwise used for the operation of the coal conveyor in the baseline.

### **B.5.** Details of the <u>baseline</u> and its development:

>>

For baseline calculations the data used is the most recent possible. Date of completion of baseline development is 05/05/2006.

EcoSecurities B.V. is the entity determining the monitoring plan and participating in the project as the Carbon Advisor. EcoSecurities is not a project participant. The person in charge of its development is:

Michael Berends EcoSecurities Kettingstraat 21-A 2511 AM Den Haag The Netherlands

Phone: +31 70 365 4749

Email: michael@ecosecurities.com

### SECTION C. Duration of the project activity / Crediting period:

### **C.1.** Duration of the <u>small-scale project activity</u>:

### C.1.1. Starting date of the small-scale project activity:

>>

01/01/2007

### C.1.2. Expected operational lifetime of the small-scale project activity:

>>

The operational lifetime of the technology is in excess of 25 years; however, the crediting period will be limited to a maximum of 21 years.





page 16

C.2. Choice of <u>crediting period</u> and related information:
C.2.1. Renewable <u>crediting period</u> :
>>
The 21-year renewable crediting period (three 7-year renewable periods) has been opted for the proposed
project.
C.2.1.1. Starting date of the first crediting period:
>>
15/01/2007
15/01/2007
C.2.1.2. Length of the first <u>crediting period</u> :
>>
7y-0m
C.2.2. Fixed crediting period:
<b>&gt;&gt;</b>
Not applicable
C.2.2.1. Starting date:
<b>&gt;&gt;</b>
Not applicable
C.2.2.2. Length:
>>
Not applicable
Not applicable
SECTION D. Application of a monitoring methodology and plan:
>>

D.1. Name and reference of approved <u>monitoring methodology</u> applied to the <u>small-scale project</u> <u>activity</u>:

>>

For project type AMS-I.C. – "Thermal Energy for the User", the relevant monitoring shall involve:

• Metering the thermal and electrical energy generated for co-generation projects. In the case of co-fired plants, the amount of fossil fuel input shall be monitored.





page 17

The thermal energy generated by the co-fired biomass boiler will displace thermal energy generated by fossil fuels in the absence of the project activity. In such cases, baseline emissions are calculated by multiplying the savings of fossil fuels with the emissions factor of these fuels.

From *Appendix B* of Simplified Modalities and Procedures for Small Scale CDM projects version 8, 03 March 2006.

## D.2. Justification of the choice of the methodology and why it is applicable to the <u>small-scale</u> <u>project activity:</u>

>>

The Tugela CDM project activity is applicable to small-scale Project type I.C. – "Thermal Energy for the User":

The project complies with criteria required by this category since the project involves a renewable energy technology that supplies a user with thermal energy that displaces fossil fuels or non-renewable sources of biomass, and is a co-fired system with an energy output that does not exceed 45 MWth. The project is an integral part of the mill and all relevant operating procedures and specifications will be included into the Mills integrated management system. This system is internationally certified by independent third party auditors. The certifications are ISO 9001:2000 and ISO 14001. OHSAS 18001 systems are implemented and certification is expected during 2007. The primary timber supplier (Sappi Forests) is also certified to the Forest Stewardship Council (FSC) requirements.

Monitoring of the actual project activity shall involve:

- Determining the historical coal consumption, coal calorific values and steam production data for a number of years prior to the project based on the business as usual coal firing of the boiler. This determination will occur prior to the fuel switch being implemented and used in the development of the baseline. The data is all available as part of the mill's ISO 9001 quality management system.
- The consumption of biomass, after the fuel switch, the resulting production of steam, and the calorific value of coal will be monitored.



CDM – Executive Board page 18

### **D.3** Data to be monitored:

>>

### Table D.1: Data to be collected in order to monitor emissions from the project activity, and how this data will be archived.

<b>ID</b> #	Data Type	Data Unit	Calculated (c) Indicated (I) or Measured (m), estimated (e)	Recording frequency	Proportion of data to be monitored	How will the data be archived? (electronic/ paper)	How long will the data be kept?	Comment
1	Quantity of biomass combusted in the project plant during the year y	Tonne	m	Daily	100%	Electronic and paper	2 years past the ending of the crediting period	A calibrated weightometer will be installed on the biomass feed conveyor All monitoring equipment will be calibrated on an annual basis
2	Net quantity of steam generated in project activity	tonnes/ hour	m	Daily	100%	Electronic and paper	2 years past the ending of the crediting period	Calibrated steam-flow meter fitted on boiler. This data will be used to calculate the baseline <i>ex post</i> . All monitoring equipment will be calibrated on an annual basis
3	Quantity of coal combusted in the project plant during the year y	Tonne	m	Daily	100%	Electronic and paper	2 years past the ending of the crediting period	A calibrated weightometer will be installed on the coal feed conveyor All monitoring equipment will be calibrated on an annual basis
4	Calorific Value of Coal	MJ/kg	m	Every three months	100%	Electronic and paper	2 years past the ending of the crediting period	The CV will be confirmed by the coal provider All monitoring equipment will be calibrated on an annual basis
5	Energy content of steam	kJ/kg	m	Every three months	100%	Electronic and paper	2 years past the ending of the crediting period	Done weekly – but reported quarterly All monitoring equipment will be calibrated on an annual basis



# $\textbf{D.4. Qualitative explanation of how quality control } (QC) \ and \ quality \ assurance \ (QA) \ procedures \ are \ undertaken:$

>>

Once implemented, the relevant data report will be submitted to a designated operational entity contracted to verify the emission reductions achieved during the crediting period. Any revisions requiring improved accuracy and/or completeness of information will be justified and will be submitted to a designated operational entity for validation. All monitoring and measurement will form part of the integrated ISO 9001 & ISO 14001 management systems and will as such form part of internal, second and third party audit schedules. The plan does not include monitoring of any variable regarding leakage since no leakage calculation is required.

Table D.2 - Quality Control and Procedures

Data	Uncertainty level of data: (high, medium, low)	Are QA/QC procedures planned for	Explain QA/QC procedures planed for these data, or why such procedures are not necessary
		these data?	
	Low	Yes	Measuring instruments will be
			calibrated and maintained regularly
			as per international and supplier
			best practise. The measurement of
1-4			biomass consumption is measured
1-4			by the plant itself, since it is the
			"supplier" of the biomass. All
			measurements will be included into
			the mill ISO9000 certified
			management system.

D.5. Please describe briefly the operational and management structure that the <u>project</u> <u>participant(s)</u> will implement in order to monitor emission reductions and any <u>leakage</u> effects generated by the project activity:

>>

The Project Developer will have designated shift technicians on site 24 hours a day which will be responsible for monitoring data required for the calculation of emissions reductions of the project activity.

- The biomass produced at the plant is the only source of biomass to the plant, and thus it is easily identifiable, separated and quantified.
- The coal will be monitored by measuring devices at the boiler (i.e. a calibrated instrument will be installed on the coal feed conveyor)
- The data will be monitored and recorded by qualified technicians according to the monitoring plan.





page 20

• The data will be electronically archived.

Proper management process and routine procedures are already in place to ensure the quality of reports required by verification audits. All required project requirements will be incorporated into the existing ISO9000 management systems.

### D.6. Name of person/entity determining the monitoring methodology:

>>

EcoSecurities B.V. is the entity determining the monitoring plan and participating in the project as the Carbon Advisor. The person in charge of its development is:

Michael Berends EcoSecurities Kettingstraat 21-A 2511 AM Den Haag The Netherlands

Phone: +31 70 365 4749

Email: michael@ecosecurities.com

### **SECTION E.: Estimation of GHG emissions by sources:**

### E.1. Formulae used:

>>

Not applicable

### **E.1.1** Selected formulae as provided in appendix **B**:

>>

This is not applicable as no formula is provided. Since Appendix B does not provide a formula, the GHG estimation options below will be used to determine the total emissions avoided by the project.

The baseline emissions for the steam generation component is calculated using Appendix B, section I.C. "Thermal Energy for the User" paragraph 5 of the simplified modalities and procedures for a small-scale CDM project activities:

### Paragraph 5 states:

"For renewable energy technologies that displace technologies using fossil fuels, the simplified baseline is the fuel consumption of the technologies that would have been used in the absence of the project activity times an emissions coefficient for the fossil fuel displaced. IPCC default values for emission coefficients may be used."



### E.1.2 Description of formulae when not provided in appendix B:

>>

Formulae are described below in section E 1.2.1 and E.1.2.4

## E.1.2.1 Describe the formulae used to estimate anthropogenic emissions by sources of GHGs due to the project activity within the project boundary:

>>

The project activity uses renewable biomass as the main energy source. The net balance of CO<sub>2</sub> emissions from renewable biomass is considered zero. A comparatively small amount of coal will also be used during the project activity, and therefore, the emissions associated with this will also be calculated. As the electricity consumed during the operation of the biomass conveyor will not be significantly different from the electricity consumed, the baseline emissions from electricity are not considered for this project.

The total steam production during the project activity is estimated to be 220,147 tonnes/year (28 t steam/hr, with 22 t steam/hr expected from the consumption of biomass, and the remainder from the consumption of coal). Recent boiler capacity has been less than this due to delayed maintenance in anticipation of this project. Of the 220,147 tonnes of steam, 154,814 tonnes are estimated to be solely derived from Biomass (due to the constraint on total biomass available annually). The difference in total steam and that produced by biomass will be derived from the use of coal. Thus, the amount of steam that is estimated to be produced from the consumption of coal is 65,333, tonnes/steam a year (i.e. steam production associated with CO<sub>2</sub> emissions in the Project Activity).

#### The formula used to calculate the Project Activity Emissions is:

(1) 
$$PE = Co_p * EF_Co$$

Where:

PE = the Project Activity Emissions (in t CO<sub>2</sub>/year)

 $Co_p$ = the quantity of Coal used in the project scenario (in tonnes) per year. (Please note that this has been estimated for this calculation, but will be directly measured during the project activity).

 $EF_C$  = the  $CO_2$  emission factor per unit of coal associated with fuel combustion (e.g.,  $CO_2/t$ ).

### The Project Activity Emissions are:

 $PE = (10,220 \text{ tonnes/year}) * (2.56 \text{ t CO}_2/\text{tonne})$ 

 $PE=26,181 tCO_2/year$ 

### Table E.1. Data used for the calculation of the estimated Project Activity Emissions:

Data Source	Value
Derived from IPCC default values	2.56 t CO2/tonne
Estimated from Sappi data	10,220
	Derived from IPCC default values



E.1.2.2 Describe the formulae used to estimate <u>leakage</u> due to the <u>project activity</u>, where required, for the applicable <u>project category</u> in <u>appendix B</u> of the simplified modalities and procedures for <u>small-scale CDM project activities</u>

>>

According to Appendix B, I.C., paragraph 8, leakage is to be considered only if the energy generating equipment is transferred from another activity or if the existing equipment is transferred to another activity. Since there is no transfer in this project, there are no sources of leakage expected from the project.

### E.1.2.3 The sum of E.1.2.1 and E.1.2.2 represents the small-scale project activity emissions:

>>

**26,181 tCO<sub>2</sub>** are the annual small-scale project activity emissions.

E.1.2.4 Describe the formulae used to estimate the anthropogenic emissions by sources of GHGs in the <u>baseline</u> using the <u>baseline methodology</u> for the applicable <u>project category</u> in <u>appendix B</u> of the simplified modalities and procedures for <u>small-scale CDM project activities</u>:

>>

Baseline emissions from steam generation using historical data

For steam generation, I.C. paragraph 5 states:

"For renewable energy technologies that displace technologies using fossil fuels, the simplified baseline is the fuel consumption of the technologies that would have been used in the absence of the project activity times and emissions coefficient for the fossil fuel displaced. IPCC default values for emission coefficients may be used."

As the fuel switch project uses biomass as a source of energy for steam generation used, the baseline emissions are calculated based on the amount of coal that would have been required for the production of steam. The baseline emissions will be calculated *ex post*.

The formula used to calculate the amount of energy required for the amount of steam produced in the baseline is:

(2)  $\mathbf{Er}_{b} = \mathbf{St}_{b} * (\mathbf{Se}/\mathbf{Eb}_{b})$ 

Where:

Er<sub>b</sub>= the quantity of energy required to produce the estimated amount of steam per year (in TJ/year).

 $St_b$ = the total estimated steam produced in the baseline (t/year)

Se= the energy content of the steam required (kj/kg)

Eb<sub>b</sub>= the efficiency of the original boiler

### Amount of energy required:

 $Er_b = (220,147 \text{ t/year}) * (2788 \text{ kj/kg})/(0.72)$ 

 $Er_b = 852.5 \text{ TJ/year}$ 

### The formula used to calculate the quantity of coal used in the baseline scenario:

(3)  $Co_b = Er_b/CVc$ 

Where:

Co<sub>b</sub>= the quantity of Coal used in the baseline (in tonnes) per year.

Er<sub>b</sub>= the quantity of energy required to produce the estimated amount of steam per year (in TJ/year).

CVc = the net calorific value of coal utilised in the baseline (in TJ/kiloton).

### The quantity of coal used in the baseline scenario:

 $Co_b = (852.5 \text{ TJ/year}) / (26.6 \text{ TJ/kiloton})$ 

Co<sub>b</sub>= 32.05 kiloton/year

 $Co_b = 32,047 \text{ tonnes/year}$ 

#### The formula used to calculate the Baseline Emissions is:

(4) 
$$BE = Co_b * EF_Co$$

Where:

BE = the Baseline Emissions (in t  $CO_2$ /year)

Co<sub>b</sub>= the quantity of Coal used in the baseline scenario (in tonnes) per year.

 $EF_Co = the CO_2$  emission factor per unit of coal associated with fuel combustion (e.g.,  $CO_2/t$ ).

### The Baseline Emissions are:

 $BE = (32,047 \text{ tonnes/year}) * (2.56 \text{ t CO}_2/\text{tonne})$ 

 $BE = 82,093 tCO_2/year$ 

### Table E.2. Data used for the calculation of the Baseline Activity Emissions:

Variable	Data Source	Value
Calorific Value Coal (CVc)	Sappi	26.6 TJ/kiloton
Coal CO <sub>2</sub> Emission Factor ( <i>EF_Co</i> )	Derived from IPCC default values	2.56 t CO2/t
	and Sappi	
Total estimated steam produced in the	Sappi	220,147 t/year
project activity( $St_b$ )		
Required energy content of steam (Se)	Sappi	2788 KJ/kg
Old Boiler Efficiency (Be <sub>b</sub> )	Steinmuller	72%

# E.1.2.5 Difference between E.1.2.4 and E.1.2.3 represents the emission reductions due to the <u>project activity</u> during a given period:

>>

The formula used to estimate the Emission Reduction is:

(7) ER = BE - PE

Where:

ER = Emission reduction (tonnes of CO<sub>2</sub>e)

 $BE = Baseline emissions (tonnes of <math>CO_2e$ )

 $PE = Project activity emissions (tonnes of <math>CO_2e$ )

ER = 82,093 - 26,181

 $ER = 55,912 \text{ t CO}_2$  annually

### **E.2** Table providing values obtained when applying formulae above:

>>

Table E.3. Summary of Baseline Emissions, Project Emissions, and Emission Reductions.

Year	Baseline Emissions (t CO <sub>2</sub> /year)	Project Emissions (t CO <sub>2</sub> /year)	Emission Reductions (t CO <sub>2</sub> /year)
2007	82,093	26,181	55,912
2008	82,093	26,181	55,912
2009	82,093	26,181	55,912
2010	82,093	26,181	55,912
2011	82,093	26,181	55,912
2012	82,093	26,181	55,912
2013	82,093	26,181	55,912
Total (tonnes of CO <sub>2e</sub> )	574,650	183,266	391,384

### **SECTION F.: Environmental impacts:**

F.1. If required by the <u>host Party</u>, documentation on the analysis of the environmental impacts of the <u>project activity</u>:

>>

An EIA was completed and a Record of Decision (ROD) obtained approving project to go ahead. EIA/4202 from Department of Agriculture & Environmental Affairs (KZN) dated 12 March 2004.





page 25

As the project was completed on existing facilities, there are no negative consequences on the local or wider environment. Thus, there are not any significant negative impacts on the environment and on people's environmental rights from the implementation of the project.

### SECTION G. Stakeholders' comments:

#### G.1. Brief description of how comments by local stakeholders have been invited and compiled:

>>

Annex 3 contains additional information regarding stakeholders' consultation the list of participants. Sappi addressed stakeholders via the independent community liaison forum (Simunye Forum) run under the auspices of the Ndondakasuka Municipality. The stakeholders have been part of an ongoing process or regular meetings covering a number of issues relevant to the local community. The number 10 boiler conversion has been presented as a CDM project as long ago as 2003, when the original EIA comments were required. Prior to this project, presentations were made on CDM and GHG emissions to the forum. An electronic communication was circulated specifically around the CDM project on the number 10 boiler conversion to the stakeholders in February 2006. A meeting was also held with the other major stakeholder, Mr Henk Kapp, Interwaste site contract manager regarding their involvement and the potential effects of the project. This stakeholder was also positive in response to the project however the mill did get correspondence from Mr Kapphim showing a potential loss in revenue from the reduction in waste material and un-depreciated capital associated with this reduction.

### G.2. Summary of the comments received:

>>

The stakeholders did not raise any major concerns or objections. A summary of the local stakeholders is included in the additional information regarding stakeholders' consultation, attached as Annex 3. The stakeholders all supported Sappi in being proactive in its early adoption of CDM in South Africa and attempt to improve the environment.

### G.3. Report on how due account was taken of any comments received:

>>

As stated under G.2 the stakeholders raised no major concerns or objections. The answers provided by Sappi and EcoSecurities in relation to impacts and complying issues satisfied the participants.






page 26

### Annex 1

### CONTACT INFORMATION ON PARTICIPANTS IN THE <u>PROJECT ACTIVITY</u>

Organization:	SAPPI Kraft (Pty) Ltd		
Street/P.O. Box:	PO Box 31560		
Building:	Sappi House		
City:	Braamfontein		
State/Region:	Gauteng		
Postcode/ZIP:	2017		
Country:	South Africa		
Telephone:	+27 11 407 8111		
FAX:	+27 11 407 8054		
E-Mail:	grant.little@sappi.com		
URL:	www.sappi.com		
Title:	CDM Project Leader		
Salutation:	Mr.		
Last Name:	Little		
Middle Name:	Stephen		
First Name:	Grant		
Department:	Manufacturing Systems		
Mobile:	083 661 7458		
Direct FAX:	011 407 8054		
Direct tel:	011 407 8309		
Personal E-Mail:	grant.little@sappi.com		





### Annex 2

### INFORMATION REGARDING PUBLIC FUNDING

This project will not receive any public funding.





### Annex 3

### STAKEHOLDER CONSULTATION

The following is a list of stakeholders consulted during the preparation of this document.

### **Table Annex 4.1: Simunye Environmental Action Committee – Contact Details**

Name	Member	Organisation	Address	E-Mail
	Status			
Shane Ramkooar	Chairperson –	Sappi – Tugela Mill	P/Bag X6034	shane.ramkooar@sappi.com
	Action		Mandeni, 4490	
	Committee			
P. Dunn (Ms)	Vice-	Mangete	P.O. Box 131	pdunn@telkomsa.net
	Chairperson	Development	Mandeni, 4490	
Ian Forbes	Administrator	Ithala	P.O. Box 15	iforbes@ithala.co.za
			Mandeni, 4490	
Farzana Adam	Member	Sappi – Tugela Mill	P/Bag X6034	farzana.adam@sappi. com
			Mandeni, 4490	
Bongonkosi Zulu	Member	Ilembe DM	P.O. Box 144	
			Mandeni, 4490	
Coleen Moonsamy	Member	DWA&F-KZN		moonsamyc@dwaf.gov.za
Darlene Janse van	Member	Tugela Mouth	P.O. Box 2016	
Rensburg			Tugela, 4494	
S.B. Mpontshane	Member	Mandeni Schools	P.O. Box 3029	
•		Environmental	Mandeni, 4490	
		Awareness Forum		
Leela Naidoo	Member	ROMP	P.O. Box 131	
			Mandeni, 4490	
Mandhla Mthethwa	Member	Ndulinde	P.O. Box 3912	
			Mandeni, 4490	
SS Ndlovu		Éndondakusuka	P.O. Box 144	
		Municipality	Mandeni, 4490	

CDM – Executive Board page 29

Blessing Mthethwa	Member	Ilembe DM	P.O. Box 1564	
			Mandeni, 4490	
Nonhlanhla Msweli	Secretariat	Éndondakusuka	P.O. Box 144	nonhlanhlam@mandeni.org.za
		Municipality	Mandeni, 4490	
Roshini Singh	Chairperson -	Éndondakusuka	P.O. Box 144	singhr@mandeni.org.za
	Forum	Municipality	Mandeni, 4490	
Mpilo Ngubane	Director - SD	Éndondakusuka	P.O. Box 144	mpilon@mandeni.org.za
		Municipality	Mandeni, 4490	
Henk Kapp	Manager	Interwaste	P/Bag X6034	
			Mandeni, 4490	