

United Nations

Framework Convention on Climate Change

TABLE OF CONTENTS

Foreword	2
Introduction	3
1.1. Methodologies and the Booklet	4
1.2. Categorization by mitigaion activity type (methodology categorization table)	6
1.3. Categorization by applied technology type/measure (methodology family trees)	12
1.4. Programmes of activities	21
1.5. Standardized baselines	22
1.6. Methodologies addressing suppressed demand	23
1.7. Methodologies having benefits for women and children	24
1.8. Methodologies for urban sectors	25
1.8.1. CDM methodologies applicable to city-based mitigation programmes	25
1.8.2. Standardization of parameters	27
1.9. Introduction to methodology Summary sheets	28
Icons, abbreviations and glossary	31
2.1. Icons used in this booklet	32
2.2. Abbreviations used in this booklet	36
2.3. Glossary	38
Methodologies for CDM Project activities	42
3.1. Introduction to Methodologies for CDM project activities	43
3.2. Methodological tools for CDM project activities	44
3.3. Methodologies for large-scale CDM project activities	50
3.4. Methodologies for small-scale CDM project activities	169
Methodologies for afforestation and reforestation (A/R) CDM project Activities	274
4.1. Introduction to methodologies for A/R CDM project activities	275
4.2. Methodological tools for A/R CDM project activities	276
4.3. Methodologies for large-scale A/R CDM project activities	278
4.4. Methodologies for small-scale A/R CDM project activities	281
Acknowledgement	284
Disclaimer	285

FOREWORD



The international community achieved a resounding success with the new, universal climate change agreement adopted at COP21 in Paris in December 2015. The Paris Agreement marks a historic turning point in our common journey towards a secure and sustainable world. The Paris Agreement will shape international climate policy for the next decades. It holds great challenges, but also exciting, transformational opportunities driven by ambitious national action and increased international cooperation.

The Paris Agreement is a catalyst for policies and action for low-carbon development, climate finance, technology transfer, capacity building and mar et-driven approaches. For market-based approaches, different types of contributions and units are available for transfer. Compatibility, comparability and fungibility among these units ensures there is no double counting and safeguards environmental integrity. Internationally recognized standards to quantify emission reductions is key for environmental integrity.

Environmental integrity is crucial for the Clean Development Mechanism, or CDM, and methodologies form the foundation for integrity. Methodologies help establish a project's emissions baseline, or anticipated emissions if the project does not move forward. They also help monitor, quantify and accurately estimate emissions once a project is built. Eligible certified emission reduction units a e determined by the difference between the baseline and actual emissions. Methodologies are essential to quantify real and accurate emission reductions. Standardized baselines allow methodologies also to cover sector-wide emissions.

While the necessity of methodologies is easy to understand, how they are constructed is quite complex. To make standards applicable to projects from diverse sectors, technoeconomic situations and geographical regions, they must be diverse in composition and application. This publication is designed to guide users through the complex world of CDM methodologies.

This booklet clearly summarizes mitigation methodologies available under the CDM. This can help market actors choose the right method to estimate their emission reductions. It is my firm belief and that of the team that deve oped this work, that this will contribute to more CDM projects where there is larger impact on sustainable development. This holds great potential to improve the livelihoods of people, reduce poverty, promote better health, directly benefit women and chill ren and enhance the regional distribution of projects, which is a key desire of Parties to the Kyoto Protocol, the CDM Executive Board and this secretariat.

CDM has played a critical role in promoting climate action on the ground in more than one hundred developing countries and remains one of the most successful running international market mechanisms. It is clear from the Paris Agreement that the CDM will continue to be an important tool in meeting the climate change challenge, and this report helps accomplish that vision.

James Grabert, Director Mitigation Division

United Nations Framework Convention on Climate Change



11 METHODOLOGIES AND THE BOOKLET

BASELINE AND MONITORING METHODOLOGIES

The Clean Development Mechanism (CDM) requires the application of a baseline and monitoring methodology in order to determine the amount of Certified Emission Reductions (CERs) generated by a mitigation CDM project activity in a host country. Methodologies are classified into five categories

- Methodologies for large-scale CDM project activities;
- Methodologies for small-scale CDM project activities;
- Methodologies for large-scale afforestation and reforestation (A/R) CDM project activities;
- Methodologies for small-scale A/R CDM project activities;
- Methodologies for carbon capture and storage (CCS) project activities.¹

Methodologies often refer to methodological tools, which address specific aspects of the project activity, e.g. to calculate Greenhouse Gas (GHG) emissions from specific sources.

PURPOSE OF THE BOOKLET

This booklet provides concise summaries of CDM methodologies and description of methodological tools, approved by the CDM Executive Board (Board). It is arranged to assist CDM project developers in identifying methodologies that are suitable for their CDM project activities.² The general purpose of the booklet is to help in achieving the objective of the Board to raise awareness of CDM methodologies.

USE OF THE BOOKLET

The booklet is intended for use by varied audiences interested in the CDM and in particular potential CDM project developers who already have an idea of the mitigation project activities they intend to implement. It facilitates the initial selection of potentially applicable methodologies. However, it cannot provide detailed guidance on specific elements of each methodology nor replace the approved methodologies. Therefore, the project developers should refer to the original methodologies available on UNFCCC CDM methodologies website.

This edition of the Booklet reflects the effective status of methodologies and methodological tools as of December 2022 (up to EB 116). However, as methodologies and methodological tools 36may change, users of the booklet are encouraged to consult EB meeting reports subsequent to EB 116 to find out whether any changes have occurred.

CONTENT OF THE BOOKLET

Each methodology is presented through a one-page summary sheet, which provides the following information:

- Typical project(s) to which the methodology is applicable;
- Type(s) of GHG emission mitigation action;
- Important conditions for application of the methodology;
- Key parameters that need to be determined or monitored;
- Visual description of baseline and project scenarios.

A short textual description of each methodological tool is also contained in the booklet.

HOW TO FIND A SUITABLE METHODOLOGY

1 CATEGORIZATION BY MITIGATION ACTIVITY TYPE

This way of looking up methodologies is according to the relevant sectoral scopes and type of mitigation activities such as renewable energy, low carbon electricity generation, energy efficiency measures, fuel and feedstock switch, GH destruction, GHG emission avoidance, displacement of a more-GHG-intensive output and GHG removal by sinks. Project developers knowing the type of mitigation activity to be implemented in their project activities can thus easily identify potentially suitable methodologies.

2. CATEGORIZATION BY APPLIED TECHNOLOGY TYPE/MEASURE

This second way of looking up methodologies focuses on the technology applied in the project activity. The categorization by technology type enables project developers to identify a set of comparable methodologies applicable to the technology that is going to be implemented in their project activities.

 $^{^{\}rm 1}$ There are no approved methodologies for CCS project activities.

² For the purpose of this booklet, CDM project activities also refer to CDM programme of

Framework Convention on

AFTER FINDING POTENTIALLY SUITABLE METHODOLOGIES

After identifying potentially applicable methodologies through the summary sheet, users should access the full text of the methodologies available on the UNFCCC CDM methodologies website. It is also advisable to look at information about existing CDM project activities that have already applied the methodologies, which is also available through this website.

If there is no approved methodology applicable, then one can propose a new methodology or request a revision of an approved methodology or methodological tool. In general, the new methodology option should be pursued if a project activity requires methodological approaches substantially different from an approved methodology. The revision option is suitable if an approved methodology is not applicable to a project activity, but the project activity is broadly similar to the one to which the approved methodology is applicable. For cases where an approved methodology is applicable to a project activity but minor changes in the methodology application are required due to the project-specific circumstances, requesting a deviation of an approved methodology could be considered.

If an approved methodology is unclear or ambiguous in its methodological procedures, a request for clarification may be submitted.

CDM PROJECT CYCLE

Once project participants have selected an applicable approved methodology, they apply it to their project activity and prepare a Project Design Document (PDD); this is the first step in the CDM project cycle. The methodology provides provisions for the core elements of a PDD:

- the demonstration of additionality;
- the establishment of the baseline scenario and the estimation of emission reductions or net removals; and
- the monitoring plan.

The main steps of the CDM project cycle and their actors are the following:

- Project design (Project Participants);
- National approval (Designated National Authority);
- Validation (Designated Operational Entity);
- Registration (CDM Executive Board);
- Monitoring (Project Participant);
- Verification (Designated Operational Entity)
- Issuance (CDM Executive Board).

USEFUL LINKS

UNFCCC CDM website

CDM methodologies, submission of proposed new methodologies and requests for clarification and revisio https://cdm.unfccc.int/methodologies/index.html

CDM project cycle

http://cdm.unfccc.int/Projects/diagram.html

CDM project activities

https://cdm.unfccc.int/Projects/index.html

CDM programmes of activities (PoA)

https://cdm.unfccc.int/ProgrammeOfActivities/index.html

CDM sectoral scopes

https://cdm.unfccc.int/DOE/scopes.html

CDM standardized Baselines

http://cdm.unfccc.int/methodologies/standard_base/ index.html>

UNEP Risø CDM pipeline analysis and database http://cdmpipeline.org/

Finding applicable methodologies — two categorization approaches

There are two ways the booklet categorizes methodologies. The first approach — the methodology categorization table — is based on the sectoral scopes defined by the UNFCCC (see https://cdm.unfccc.int/DOE/scopes.html). This table allocates the methodology to generic mitigation activity types. This approach is useful for project developers who have not yet made a technology choice or CDM stakeholders who are interested in a type of mitigation activity.

It structures methodologies according to technology and the history of methodology development that has led to several "families" of methodologies all relating to a specific technology. It is appropriate for project developers who have already decided on a particular technology for their project.

12. CATEGORIZATION BY MITIGAION ACTIVITY TYPE (METHODOLOGY CATEGORIZATION TABLE)

In addition to the methodology sectoral scopes³, methodologies in this table are also categorized by the type of mitigation activity, these being renewable energy, low carbon electricity generation, energy efficiency measures, fuel switch, GHG destruction GHG emission avoidance and GHG removal by sinks.

Sectoral scopes 1 to 3 (energy sectors – generation, supply and consumption) are first distinguished according to

- Electricity generation and supply;
- Energy for industries;
- Energy (fuel) for transport;
- Energy for households and buildings.

And then categorized in terms of type of mitigation activity:

- Displacement of a more-GHG-intensive output:
 - i. Renewable energy;
 - ii. Low carbon electricity.
- Energy efficiency
- Fuel and feedstock switch.

Sectoral scopes 4 to 15 (other sectors) are categorized according to these mitigation activities:

- Displacement of a more-GHG-intensive output;
- Renewable energy;
- Energy efficiency

- GHG destruction;
- GHG emission avoidance;
- Fuel switch;
- GHG removal by sinks.

DESCRIPTION OF TYPES OF MITIGATION ACTIVITIES

DISPLACEMENT OF A MORE-GHG-INTENSIVE OUTPUT

This category refers to project activities where the consumption of a more-GHG-intensive output is displaced with the output of the project. The category is separately defined because of the importance of not jus implementing the project activity, but also ensuring that the more-GHG-intensive output is displaced by the output of the project activity.

All renewable energy generation and low carbon energy generation project activities are part of this category. Many other methodologies are also allocated to this category depending upon how the emission reductions are calculated in the corresponding methodologies.

Examples:

- Power generation from waste energy recovery and supply to a recipient who was receiving more-GHGintensive power;
- Power generation using renewable or low carbon energy sources and export of power to a grid with combined margin emission factor of more than zero and/or to a recipient using fossil fuel based power in the absence of project activity.

³ The Methodology categorization table allocates the methodology to the sectoral scope(s) that have been formally defined for it, which are primarily used as he basis of DOE accreditation. However, if there are additional sectoral scopes that are also applicable to the methodology, then the methodology is also shown in these sectors in the table. This is to make it potentially easier to look up the methodology.

Categorization by Mitigation Activity Type (Methodology Categorization Table)

RENEWABLE ENERGY

This category includes the use of various renewable energy sources.

Examples:

- Hydro power plant;
- Wind power plant;
- Solar cooker;
- Biomass-fired boiler

LOW CARBON ELECTRICITY

This encompasses mainly Greenfield electricity generation based on less carbon intensive fuel such as natural gas. As no power plant exists at the project location before implementation of the project, the mitigation activity is not fuel switch. At the same time the applied technology might not be best available technology, differentiating it from energy efficiency measures. A typical low carbon electricity project is the construction of a greenfield natural-gas-fired power plant. Also projects that reduce emissions due to grid extension or connection are included under this category where applicable.

ENERGY EFFICIENCY

The category energy efficiency includes all measures aiming to enhance the energy efficiency of a certain system. Due to the project activity, a specific output or service requires less energy consumption. Waste energy recovery is also included in this category.

Examples:

- Conversion of a single cycle to a combined cycle gas-fired power plant
- Installation of a more efficient steam turbine
- Use of highly efficient refrigerators or compact fluorescent lamps
- Recovery of waste heat from flue gases
- Recovery and use of waste gas in a production process.

FUEL OR FEEDSTOCK SWITCH

In general, fuel switch measures in this category will replace carbon-intensive fossil fuel with a less-carbon-intensive fossil fuel, whereas a switch from fossil fuel to renewable biomass is categorized as "renewable energy". In case of a feedstock switch, no differentiation between fossil and renewable sources is applied.

Examples:

- Switch from coal to natural gas;
- Feedstock switch from fossil sources of CO₂ to renewable sources of CO₂;
- Use of different raw material to avoid GHG emissions;
- Use of a different refrigerant to avoid GHG emissions;
- Blending of cement in order to reduce demand for energy intensive clinker production.

GHG DESTRUCTION

The category GHG destruction covers activities that aim at the destruction of GHG. In many cases, the project includes capture or recovery of the GHG. The destruction is achieved by combustion or catalytic conversion of GHGs.

Examples:

- Combustion of methane (e.g. biogas or landfill gas)
- Catalytic N₂O destruction.

GHG EMISSION AVOIDANCE

This category includes various activities where the release of GHG emissions to the atmosphere is reduced or avoided.

Examples:

- Avoidance of anaerobic decay of biomass;
- Reduction of fertiliser use.

GHG REMOVAL BY SINKS

All A/R activities are allocated to this category. Through photosynthesis in plants, CO₂ from the atmosphere is removed and stored in form of biomass.

8

Methodologies for large-scale CDM project activities Methodologies for small-scale CDM project activities

Climate Change

Methodologies for small and large-scale a orestation and reforestation (A/R) CDM project activities Methodologies that have a particular potential to directly improve the lives of women and children AM0000

(Methodology Categorization Table)

Methodology Categorization in the Energy Sector Table VI-1.

Displacement of a more-GHG-intensive output Low carbon electricity Energy efficiency	AM0007 AM0019 AM0026 AM0052 AM0100 AM0103 ACM0002 ACM0006 ACM0018 ACM0020 ACM0022 AMS-I.A. AMS-I.C.	AM0007 AM0036 AM0053 AM0069 AM0075 AM0089 ACM0006 ACM0020 ACM0022	AM0089 ACM0017	AM0053 AM0069 AM0072 AM0075 AM0094 ACM0022
(renewable-/ non renewable sources) Displacement of a more-GHG-intensive output Low carbon electricity Energy	AM0019 AM0026 AM0052 AM0100 AM0103 ACM0002 ACM0006 ACM0018 ACM0020 ACM0022 AMS-I.A.	AM0036 AM0053 AM0069 AM0075 AM0089 ACM0006 ACM0020	_	AM0069 AM0072 AM0075 AM0094 ACM0022
Displacement of a more-GHG-intensive output Low carbon electricity Energy	AM0026 AM0052 AM0100 AM0103 ACM0002 ACM0006 ACM0018 ACM0020 ACM0022 AMS-I.A.	AM0053 AM0069 AM0075 AM0089 ACM0006 ACM0020		AM0072 AM0075 AM0094 ACM0022
Displacement of a more-GHG-intensive output Low carbon electricity Energy	AM0100 AM0103 ACM0002 ACM0006 ACM0018 ACM0020 ACM0022 AMS-I.A.	AM0075 AM0089 ACM0006 ACM0020 ACM0022		AM0094 ACM0022
Low carbon electricity Energy	AM0103 ACM0002 ACM0006 ACM0018 ACM0020 ACM0022 AMS-I.A.	AM0089 ACM0006 ACM0020 ACM0022		ACM0022
Low carbon electricity Energy	ACM0002 ACM0006 ACM0018 ACM0020 ACM0022 AMS-I.A.	ACM0006 ACM0020 ACM0022		
Low carbon electricity Energy	ACM0006 ACM0018 ACM0020 ACM0022 AMS-I.A.	ACM0020 ACM0022		ACM0024
Low carbon electricity Energy	ACM0018 ACM0020 ACM0022 AMS-I.A.	ACM0022		
Low carbon electricity Energy	ACM0020 ACM0022 AMS-I.A.			AMS-I.A.
Low carbon electricity Energy	ACM0022 AMS-I.A.	ΔCM0024		AMS-I.B.
Low carbon electricity Energy	AMS-I.A.	ACIVIOUZ4		AMS-I.C.
Low carbon electricity Energy		AMS-I.C.		AMS-I.E.
Low carbon electricity Energy	ANAC IC	AMS-I.F.		AMS-I.F.
Low carbon electricity Energy	AIVIS-I.C.	AMS-I.G.		AMS-I.G.
electricity	AMS-I.D.	AMS-I.H.		AMS-I.H.
electricity	AMS-I.F.			AMS-I.I.
electricity	AMS-I.G.			AMS-I.J.
electricity	AMS-I.H.			AMS-I.K.
electricity	AMS-I.M.			AMS-I.L.
Energy	AM0045	AM0099		
	AM0074	ACM0025		
	AM0099	ACM0026		
	AM0104			
	AM0108			
	ACM0025			
	ACM0026			
efficiency	AM0048	AM0048		AM0048
	AM0049	AM0049		AM0058
	AM0061	AM0055		AM0084
	AM0062	AM0056		AM0107
	AM0076	AM0076		
	AM0084	AM0084		
	AM0107	AM0095		
	ACM0006	AM0098		
	ACM0007	AM0107		
	ACM0012	ACM0006		
	ACM0013	ACM0012		
		ACM0018		
	ACM0018	ACM0023		
	ACM0018 AMS-II.B. AMS-II.H.			

United Nations

Framework Convention on Climate Change

 $\label{lem:methodology} \textbf{Categorization in the Energy Sector} \ (\texttt{continued})$ Table VI-1.

Sectoral scope	Туре	Electricity generation and supply	Energy for industries	Energy (fuel) for transport	Energy for households and buildings
1 Energy industries	Fuel/feedstock	AM0049	AM0049		AM0081
(renewable-/	switch	ACM0006	AM0056		
non renewable sources)		ACM0011	AM0069		
(continued)		ACM0018	AM0081		
		AMS-I.M.	ACM0006		
		AMS-III.AG.	ACM0009		
		AMS-III.AH.	ACM0018		
		AMS-III.AM.	AMS-III.AM.		
2 Energy distribution	Renewable	AMS-III.AW.	AM0069		AMS-III.AW.
	energy	AMS-III.BB.	AM0075		
		AMS-III.BL.			
	Energy	AM0067			
	efficiency	AM0097			
		AM0118			
		AMS-II.A.			
		AMS-II.T.			
		AMS-III.BB.			
		AMS-III.BL.			
	Fuel/feedstock	AMS-III.BB.	AM0077		
	switch	AMS-III.BL.			
3 Energy demand	Renewable				AMS-III.AE.
	energy				AMS-III.AR.
	Energy	AMS-III.AL.	AM0017		AM0020
	efficiency		AM0018		AM0044
			AM0020		AM0046
			AM0044		AM0060
			AM0060		AM0086
			AM0068		AM0091
			AM0088		AM0113
			AM0105		AM0117
			AMS-I.I.		AM0120
			AMS-II.C.		AMS-II.C.
			AMS-II.F.		AMS-II.E.
			AMS-II.G.		AMS-II.F.
			AMS-II.L.		AMS-II.G.
			AMS-II.N.		AMS-II.J.
			AMS-II.P.		AMS-II.K.
			AMS-II.S.		AMS-II.L.
					AMS-II.M.
					AMS-II.N.
					AMS-II.O.
					AMS-II.Q.
					AMS-II.R.
					AMS-III.AE.
					AMS-III.AR.
					AMS-III.AV.
					AMS-III.X.
	Fuel/feedstock	AMS-III.B.	AM0121		AMS-II.F.
	switch		ACM0003		AMS-III.B.
			ACM0005		
			AMS-II.F.		
			AMS-III.B.		

9

Table VI-2. Methodology Categorization other Sectors

Sectoral scope	Renewable energy	Energy Efficiency	GHG destruction	GHG emission avoidance	Fuel/Feedstock Switch	GHG removal by sinks	Displacement of a more-GHG- intensive output
4 Manufacturing industries	AM0007	AM0049	AM0078	AM0057	AM0049		AM0070
	AM0036	AM0055	AM0096	AM0065	AM0092		AM0095
	ACM0003	AM0070	AM0111	AM0092	AM0121		AM0114
	AMS-III.Z.	AM0106	AMS-III.K.	AM0121	ACM0003		AM0115
	AMS-III.AS.	AM0109		ACM0005	ACM0005		ACM0012
	AMS-III.BG.	AM0114		ACM0021	ACM0009		
		AM0115		AMS-III.L.	ACM0015		
		ACM0012			AMS-III.N.		
		AMS-II.D.			AMS-III.Z.		
		AMS-II.H.			AMS-III.AD.		
		AMS-II.I.			AMS-III.AM.		
		AMS-III.P.			AMS-III.AN.		
		AMS-III.Q.			AMS-III.AS.		
		AMS-III.V.					
		AMS-III.Z.					
		AMS-III.AS.					
		AMS-III.BD.					
		AMS-III.BG.					
5 Chemical industries	ACM0017	AM0055	ACM0019	AM0053	AM0027		AM0053
	AM0053	AM0114	AM0021	AMS-III.M.	AM0037		AM0055
	AM0075	AMS-III.AC.	AM0028	AMS-III.AI.	AM0050		AM0069
	AM0089	AMS-III.AJ.	AM0098		AM0063		AM0081
					AM0069		AM0098
					AMS-III.J.		AM0114
					AMS-III.O.		AM0115
6 Construction					AMS-III.BH.		AMS-III.BH.
7 Transport	AMS-I.M.	AM0031			AMS-III.S.		AMS-III.BP.
	AMS-III.T.	AM0090			AMS-III.AY.		
	AMS-III.AK.	AM0101					
	AMS-III.AQ.	AM0110					
		AM0116 ACM0016					
		ACMUU16 AMS-III.C.					
		AMS-III.C.					
		AMS-III.U.					
		AMS-III.AA.					
		AMS-III.AP.					
		AMS-III.BC.					
		AMS-III.BC.					
		AMS-III.BN.					
		AMS-III.BN.					
8 Mining/mineral production	ACM0003	יחםיווו-כואוט	ACM0008		AM0121		
• mining/mineral production	ACIVIOUUS		ACM0008		ACM0005		
			7.11000-7		.10.0003	1	1

(Methodology Categorization Table)

Table VI-2. Methodology Categorization other Sectors (continued)

	Renewable	Energy	GHG	GHG emission	Fuel/Feedstock	GHG removal	Displacement
Sectoral scope	energy	Efficiency	destruction	avoidance	Switch	by sinks	intensive output
9 Metal production	AM0082	AM0038		AM0030	AM0082		
3 Metal production	AIVIUU82	AM0059		AM0059	AIVIUU82		
		AM0066		AM0065			
		AM0068		Aivious			
		AM0109					
		AMS-III.V.					
10 Fugitive emissions from			AM0064	AM0023	AM0009	AM0074	AM0009
fuel (solid, oil and gas)			AM0122	AM0043	AM0037		AM0077
			ACM0008	AMS-III.BI.	AM0077		
			AMS-III.W.				
11 Fugitive emissions from			AM0001	AM0035	AM0071		
production and consumption			AM0078	AM0065	AM0092		
of halocarbons and SF ₆			AM0096	AM0079	AMS-III.AB.		
			AM0111	AM0092			
			AMS-III.X.	AM0119			
				AMS-III.X.			
12 Solvent use							
13 Waste handling	ACM0022	AMS-III.AJ.	AM0073	AM0057			
and disposal	AM0112	AMS-III.BA.	ACM0001	AM0080			
	AMS-III.BJ.		ACM0010	AM0083			
			ACM0014	AM0093			
			AMS-III.G.	AM0112			
			AMS-III.H.	ACM0022			
			AMS-III.AX.	AMS-III.E.			
				AMS-III.F.			
				AMS-III.I.			
				AMS-III.Y.			
				AMS-III.AF.			
				AMS-III.AU.			
14 Afforestation and				AIVI3-III.DE.		AR-AM0014	
reforestation						AR-ACM00014	
reforestation						AR-AMS0003	
						AR-AMS0007	
15 Agriculture			AM0073	AMS-III.A.	AMS-III.R.		
<u> </u>			ACM0010	AMS-III.AU.			
			AMS-III.D.	AMS-III.BE.			
			AMS-III.R.	AMS-III.BF.			
				AMS-III.BK.			

13. CATEGORIZATION BY APPLIED TECHNOLOGY TYPE/MEASURE (METHODOLOGY FAMILY TREES)

There have been distinct development phases of methodologies over time, leading to "families" when one methodology catalyzed the development of other methodologies. The figures below show the families of methodologies in form of family trees. They are designed as follows: Each methodology is denoted by a box showing its unique identification number. Methodologies that can be found in the same family tree deal with comparable technologies or measures.

Methodologies for large-scale CDM project activities

Methodologies for small-scale CDM project activities

Methodologies for small and large-scale a orestation and reforestation (A/R) CDM project activities

AM0000 Methodologies that have a particular potential to directly improve the lives of women and children

Figure VII-1. Methodologies for renewable electricity



⁴ The concept of methodology families and family trees was initially adopted in the following guidebook: Understanding CDM Methodologies: A guidebook to CDM Rules and Procedures, written by Axel Michaelowa, Frédéric Gagnon-Lebrun, Daisuke Hayashi, Luis Salgado Flores, Philippe Crête and Mathias Krey, commissioned by the UK Department for Environment Food and Rural Affairs (© Crown Copyright 2007).

Figure VII-2. Methodologies for renewable energy (thermal or mechanical energy)

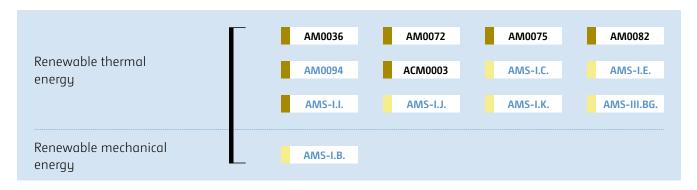


Figure VII-3. Methodologies for efficient or less-carbon-intensive fossil-fuel-fired power plants

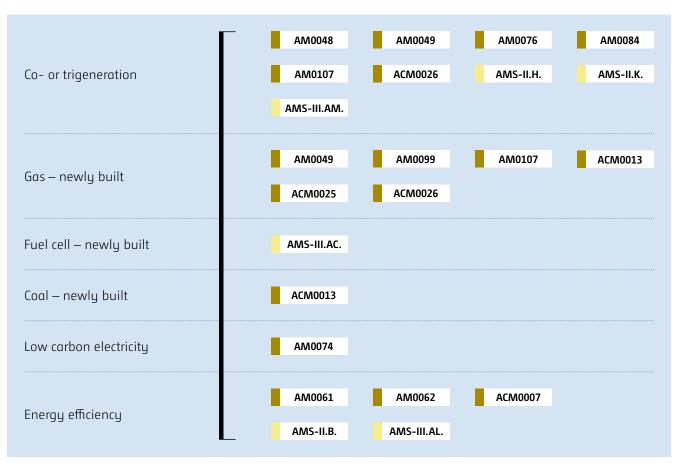


Figure VII-4. Methodologies for fuel switch

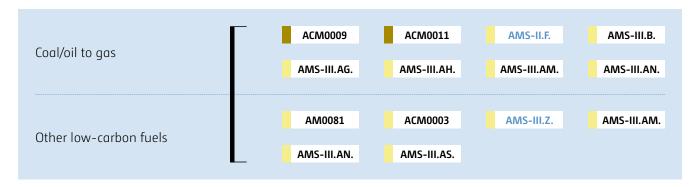


Figure VII-5. Methodologies for biofuel

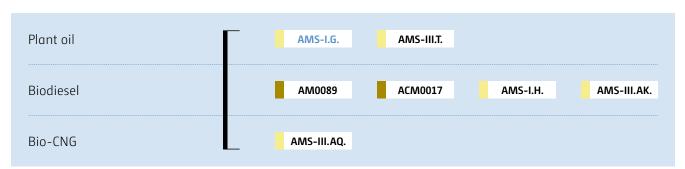


Figure VII-6. Methodologies for industrial energy efficiency

Steam systems	AM0017	AM0018		
Water pumping	AM0020	AMS-II.C.	AMS-II.P.	AMS-II.S.
	AM0055	AM0058	AM0066	AM0095
Waste gas/energy recovery	AM0098	AM0115	ACM0012	AMS-II.I.
	AMS-III.P.	AMS-III.Q.	AMS-III.BI.	
Metal	AM0038	AM0059	AM0066	AM0068
vietai	AM0109	AMS-III.V.	AMS-III.BD.	
Boilers	AM0044	AM0056	ACM0023	AMS-II.D.
Chillers	AM0060			
Kilns	AM0066	AM0068	AM0106	AMS-III.Z.
District heating	AM0058			
Lighting	AMS-II.L.			
Agriculture	AMS-II.F.	AMS-II.P.	AMS-II.S.	AMS-III.A.
Agriculture	AMS-III.BE.			
Efficient motor or motor appliances (pump, fans, compressor)	AMS-II.S.			
Other/various technologies	8800MA	AM0105	AM0114	AM0115
other, various technologies	AM0118	AMS-II.C.	AMS-II.D.	AMS-II.T.

Figure VII-7. Methodologies for household & building energy efficiency




Figure VII-8. Methodologies for gas flaring and gas leak reduction



Figure VII-9. Methodologies for feedstock switch



Figure VII-10. Methodologies for industrial gases

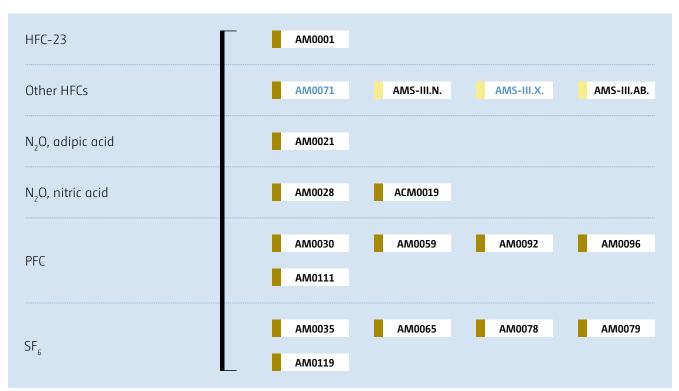


 ${\bf Figure\,VII-11.} \qquad \qquad {\bf Methodologies\,for\,waste\,management\,and\,wastewater}$

Alternative treatment – composting	ACM0022	AMS-III.F.	AMS-III.AF.	
Alternative treatment – other technologies	AM0112 AMS-III.R.	ACM0022 AMS-III.Y.	AMS-III.E.	AMS-III.L.
Alternative treatment – aerobic	AM0083	AM0093	AMS-III.AX.	
Landfill gas	ACM0001	AMS-III.G.		
Lagoons and biodigester — biogas	ACM0014	AMS-III.H.	AMS-III.AO.	
Manure and comparable animal waste	AM0073	ACM0010	AMS-III.D.	
Aerobic wastewater treatment	AM0080	AMS-III.I.		
Biogenic methane	AM0053	AM0069	AM0075	ACM0024

 ${\bf Figure\,VII\text{-}12}. \hspace{1.5cm} {\bf Methodologies\,for\,transport}$

Bus systems	AM0031	AMS-III.BN.		
Mass rapid transit systems	ACM0016	AMS-III.U.		
High speed rail systems	AM0101			
Energy efficiency	AMS-III.C.	AMS-III.AA.	AMS-III.AP.	AMS-III.BC.
Fuel switch	AMS-III.S.	AMS-III.AK.	AMS-III.AQ.	AMS-III.AY.
Transportation of cargo	AM0090	AMS-III.BO.		
Transportation of liquid fuels	AM0110			
Technology for improved driving	AMS-III.AT.	AMS-III.BC.		
Electric taxiing systems for airplanes	AM0116			
Solar power for domestic aircraft at-gate operations	AMS-I.M.			
Bicycles, e-bikes and Tricycles	AMS-III.BM.			
Shore-side electricity supply for ships	AMS-III.BP.			

Figure VII-13. Other methodologies

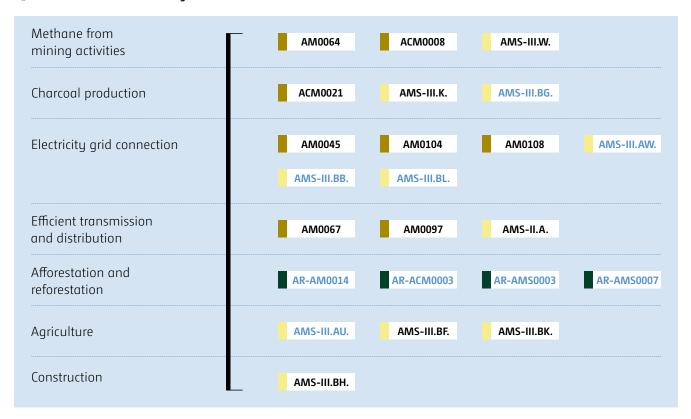

14. PROGRAMMES OF ACTIVITIES

THE CONCEPT

In the CDM, a Programme of Activities (PoA) is defined as a voluntary coordinated action by a private or public entity that coordinates and implements any policy/measure or stated goal, which leads to emission reductions or net removals that are additional to any that would occur in the absence of the PoA, via an unlimited number of Component Project Activities (CPAs).

A CPA is a single measure, or a set of interrelated measures under a PoA, to reduce emissions or result in net removals, applied within a designated area.

A PoA is therefore like an "umbrella program", which is registered by the Board. Individual CPAs that comply with the eligibility criteria specified in the PoA Design Document (PoA-DD) of the registered PoA can be included under this "umbrella" and actually generate emission reductions or net removals to benefit from carbon revenues.

BENEFITS

Compared to regular CDM project activities, PoAs have many benefits, particularly for less developed countries or regions. The process for the inclusion of individual CPAs under a registered PoA is considerably simplified and results in lower costs as compared to registration of regular project activities.

The main benefits of PoAs are

- Transaction costs, investment risks and uncertainties for individual CPA participants are reduced;
- PoAs are managed by a designated Coordinating and Managing Entity (CME). The CME is responsible for most of the CDM process. Therefore, direct engagement of individual project developers in the CDM process is not required;
- Access to the CDM is extended to smaller project activities which would not be viable as regular project activities;
- Emission reductions can be continuously scaled up after PoA registration, since an unlimited number of CPAs can be added at a later stage;
- Many technologies with high co-benefits, e.g. household technologies, are supported by PoAs;

- Specific regional policy goals can be effectively supported by accessing carbon finance through PoAs
- Monitoring/Verification of parameter values may be undertaken on a collective basis by utilizing a sampling approach;
- No registration fee is due for each CPA included after registration. Registration fees are based on the expected average emission reductions or net removals of the "actual case" CPAs submitted at the PoA registration.

PoA IN THE CDM PIPELINE

At the time of preparation of this edition of the Booklet, there were some sectors that have a higher proportion of PoAs in the CDM pipeline than regular project activities: energy efficiency demand side (sectoral scope 3), waste (sectoral scope 13) and solar energy (sectoral scope 1). Furthermore, out of the registered PoAs, it was observed that some methodologies were commonly used, such as:

- ACM0002 Grid-connected electricity generation from renewable sources
- AMS-I.C. Thermal energy production with or without electricity
- AMS-I.D. Grid connected renewable electricity generation
- AMS-II.G. Energy efficiency measures in thermal applications of non-renewable biomass
- AMS-II.J. Demand-side activities for efficient lighting technologies
- AMS-III.R. Methane recovery in agricultural activities at household/small farm

15. STANDARDIZED BASELINES

THE CONCEPT

A standardized baseline is a baseline established for a Party or a group of Parties to facilitate the calculation of emission reduction and removals and/or the determination of additionality for CDM project activities.

The following elements may be standardized by an approved standardized baseline:

- (a) Additionality; and/or
- (b) Baseline (baseline scenario and/or baseline emissions).

A standardized baseline can be a positive list containing names of emission reduction activities that, if implemented in a given country or region, would be considered automatically additional under certain conditions. It can also be a baseline emission factor to be used for the purpose of estimation of baseline emissions (e.g. grid emission factor).

BENEFITS

The objective of standardized baselines is to scale up the abatement of GHG emissions while ensuring environmental integrity by potentially:

- Reducing transaction costs;
- Enhancing transparency, objectivity and predictability;
- Facilitating access to the CDM, particularly with regard to underrepresented project types and regions;
- Simplifying measuring, reporting and verification

APPROVED STANDARDIZED BASELINES

Reference	Sector	Applicable countries/Region	Full View and History
ASB0005-2021	Power	Belize	Grid emission factor for the Belize national power grid (version 01.0)
ASB0008-2020	Rice cultivation	The Republic of the Philippines	Methane Emissions from Rice Cultivation in the Republic of the Philippines (version 01.0)
ASB0011-2021	Waste	The Dominican Republic	Landfill gas capture and flaring in the Dominican Republic (version 01.0
ASB0034-2021	034–2021 Power West African Power Pool (WAPP) comprising of the following countries: Benin, Burkina Faso, Côte d'Ivoire, Ghana, Mali, Niger, Nigeria, Senegal, Republic of Togo		Grid emission factor for West African Power Pool (version 01.0)
ASB0038-2021	Power	Republic of Armenia	Grid emission factor for the electricity system of the Republic of Armenic (version 01.0)
ASB0045-2019	Power	Guyana	Grid emission factor of Guyana (version 01.0)
ASB0046-2019	Power	Mauritius	Mauritius Grid Emission Factor (version 01.0)
ASB0048-2020			Specific CO2 emissions in Residential Buildings in Republic of Korea (version 01.0)
ASB0049-2020	Cookstoves	Republic of the Union of Myanmar	Fraction of non-renewable biomass in Myanmar (version 01.0)
ASB0050-2020	Power	Republic of Kenya	Grid Emission Factor for the Republic of Kenya (version 01.0)
ASB0051-2021	Power	Antigua and Barbuda	Grid Emission Factor for Antiqua and Barbuda (version 01.0)
ASB0052-2021	Power	Cape Verde	Grid emission factor for Cape Verde (version 01.0)
ASB0053-2021	Power	Saint Kitts and Nevis	Grid Emission Factors for Saint Kitts and Nevis (version 01.0)
ASB0054-2022	Power	Uganda	Grid emission for the national power grid of Uganda (version 01.0)

16. METHODOLOGIES ADDRESSING SUPPRESSED DEMAND

THE CONCEPT

Under the CDM, suppressed demand is defined as a "Scenario where future anthropogenic emissions by sources are projected to rise above current levels, due to the specific circumstances of the host Party".

The concept of suppressed demand is included in some CDM methodologies to consider situations where key services such as lighting and heating, water supply, waste disposal and transportation are only available in quantities that are insufficient to meet basic human needs before the implementation of a CDM project activity. This can be due to low income and lack of technologies/infrastructures or resources for its implementation. The minimum service level required to fulfil generally accepted basic human needs is expected to be reached in the future as host countries develop their economies, hence incomes increase, resources improve and technologies/infrastructures are implemented.

For example, before the start of a CDM project activity, households may be devoid of access to an electricity grid and have only a few kerosene lamps in place that are operated for short time periods, or just use candles. Or they may not have access to clean drinking water and therefore boil a small quantity of water manually.

The concept of suppressed demand is included in CDM methodologies for the baseline calculation specifying a minimum service level. For example, the daily amount of drinking water availability recommended by the World Health Organization is used as baseline water provision volume for the methodology AM0086 for water purification. In other methodologies such as AMS-I.A. and AMS-I.L., suppressed demand is taken into account by applying default emission factors for high emission technologies (e.g. kerosene lamps) assumed to be used due to the suppressed demand situation. In the methodology ACM0022, a default emission factor for a shallow landfill can be used in the absence of an organized waste collection and disposal system. If suppressed demand were not included, baseline emissions would be so small that project activities would become unattractive under the CDM due to the small number of CERs generated.

Methodologies addressing the issue of suppressed demand are labelled with a specific icon "Suppressed demand", put on the top right of the summary sheet.

BENEFIT

The consideration of suppressed demand allows host countries to improve life conditions by implementing CDM project activities.

Another benefit is the reduction of transaction costs for CDM project developers. Detailed data gathering to establish parameter values for baseline emission calculations may not be necessary as CDM methodologies that address the issue of suppressed demand usually include default values that are representative for the specific service level, such as the amount of kerosene used for lighting.

METHODOLOGIES ADDRESSING SUPPRESSED DEMAND

AM0086	Installation of zero energy water purifier for safe drinking water application
AM0091	Energy efficiency technologies and fuel switching in new and existing buildings
ACM0022	Alternative waste treatment processes
AMS-I.A.	Electricity generation by the user
AMS-I.B.	Mechanical energy for the user with or without electrical energy
AMS-I.L.	Electrification of rural communities using renewable energy
AMS-II.R.	Energy efficiency space heating measures for residential buildings
AMS-III.F.	Avoidance of methane emissions through composting
AMS-III.AR.	Substituting fossil fuel based lighting with LED/CFL lighting systems
AMS-III.AV.	Low greenhouse gas emitting safe drinking water production systems
AMS-III.BB.	Electrification of communities through grid extension or construction of new mini-grids
AMS-III.BL.	Integrated methodology for electrification of communities

17. METHODOLOGIES HAVING BENEFITS FOR WOMEN AND CHILDREN

The dual goals of the CDM are to promote sustainable development and reduce GHG emissions or enhance GHG removals. The outcomes of a CDM project activity should therefore directly or indirectly improve the living conditions of all people.

What has been highlighted in the booklet is that some methodologies have a particular potential to directly improve the lives of women and children effected by the project activity. These methodologies are labelled with a specific icon "Women and children", put on the top right of the summary sheet.

The criteria used to label these methodologies as having particular benefits for women and children are the potential to:

- increase access to affordable household fittings and appliances (e.g. light globes, refrigerators);
- optimize tasks typically undertaken by women or children (e.g. fuel wood gathering, cooking, water collection);
- improve the living environment of women and children (e.g. better air quality, heating, lighting); or
- utilize community-based participatory approaches, that give women and children an opportunity to learn about the projects and contribute to decision making processes.

In the case of A/R CDM project activities, this icon is also indicated for project activities that generate new local employment opportunities because these positions are often filled by women

It is important to note that a methodology that has not been labelled with this icon will not impact adversely on women and children.

The following publication, "CDM and Women", accessible on the CDM website, further highlights some women-friendly methodologies and aims to encourage project developers to consider the CDM when planning projects to help empower and improve women's lives. United Nations

Framework Convention on Climate Change

18. METHODOLOGIES FOR URBAN SECTORS

18.1 CDM METHODOLOGIES APPLICABLE TO CITY-BASED MITIGATION PROGRAMMES

- 1. In urban centres, there are many opportunities for reducing greenhouse gas (GHG) emissions. City-based mitigation programmes may target various sectors, including buildings, transport, energy supply and demand, water supply and treatment, and waste management, and may contain a range of measures in each sector aimed at reducing GHG emissions.
- 2. Many of these interventions could result in GHG emission reductions that are additional and eligible under the CDM. However, these measures may be dispersed and the resulting emission reduction from each individual measure relatively low. On the other

- hand, if these measures are implemented together at a community or city level, they could potentially generate significant emission reductions when the individual reductions are summed together.
- 3. Mitigation initiatives may also be implemented in a phased manner, in which case they may be better suited to be the structure of a PoA because that would allow a stage-wise implementation of the projects and an expansion of the mitigation measures during the PoA period (i.e. 28 years).
- 4. The CDM framework offers a wide range of methodologies and tools to estimate the emission reduction effect of these projects. A city-wide mitigation programme developed under the CDM may apply these methodologies and take into account any cross effects that may occur as a result of their application.
- The tables below provide a non-exhaustive list of the methodologies applicable to each sector: Urban Transport (table 1); Household & Building Energy Generation and Energy Efficiency (table 2); and Waste Management and Wastewater (table 3).

TABLE 1. LIST OF CDM METHODOLOGIES RELEVANT TO URBAN TRANSPORT

Measure	CDM methodology
Bicycles, tricycles, e-bikes or e-tricycles	AMS-III.BM. Lightweight two and three wheeled personal transportation
Bus systems	AM0031 Bus rapid transit projects
Mass rapid transit systems	ACM0016 Mass Rapid Transit Projects AMS-III.U. Cable Cars for Mass Rapid Transit System (MRTS)
Energy efficiency	AMS-III.C. Emission reductions by electric and hybrid vehicles AMS-III.AA. Transportation Energy Efficiency Activities using Retrofit Technologies AMS-III.AP. Transport energy efficiency activities using post - fit Idling Stop device AMS-III.BC. Emission reductions through improved efficiency of vehicle fleets
Fuel switch	AMS-III.S. Introduction of low-emission vehicles/technologies to commercial vehicle fleets AMS-III.T. Plant oil production and use for transport applications AMS-III.AK. Biodiesel production and use for transport applications AMS-III.AQ. Introduction of Bio-CNG in transportation applications AMS-III.AY. Introduction of LNG buses to existing and new bus routes
Transportation of cargo	AM0090 Modal shift in transportation of cargo from road transportation to water or rail transportation
Transportation of liquid fuels	AM0110 Modal shift in transportation of liquid fuels
Technology for improved driving	AMS-III.AT. Transportation energy efficiency activities installing digital tachograph systems to commercial freight transport fleets AMS-III.BC. Emission reductions through improved efficiency of vehicle fleets

TABLE 2. LIST OF CDM METHODOLOGIES RELEVANT TO URBAN HOUSEHOLD & BUILDING ENERGY GENERATION AND ENERGY EFFICIENCY

Measure	CDM metho	odology
Renewable electricity (captive power)	AMS-I.F.	Renewable electricity generation for captive use and mini-grid
Thermal energy for cooking	AMS-I.E. AMS-I.I. AMS-I.K. AMS-II.G.	Switch from non-renewable biomass for thermal applications by the user Biogas/biomass thermal applications for households/small users Solar cookers for households Energy efficiency measures in thermal applications of non-renewable biomass
Solar water heating	AMS-I.J.	Solar water heating systems (SWH)
Energy efficiency in water delivery	AM0020 AMS-II.C. AMS-II.S.	Baseline methodology for water pumping efficiency improvements Demand-side energy efficiency activities for specific technologies Energy efficiency in motor systems
Water purifier	AM0086 AMS-III.AV.	Distribution of zero energy water purification systems for safe drinking water Low greenhouse gas emitting safe drinking water production systems
Water saving	AMS-II.M.	Demand-side energy efficiency activities for installation of low-flow hot water savings devices
	1	

TABLE 2. (CONT.)

TABLE 2. (CONT.)	
Refrigerators/chillers	AM0060 Power saving through replacement by energy efficient chillers AMS-II.C. Demand-side energy efficiency activities for specific technologies AMS-II.O. Dissemination of energy efficient household appliances AMS-III.X. Energy Efficiency and HFC-134a Recovery in Residential Refrigerators AM0120 Energy-efficient refrigerators and air-conditioners
Lighting	AM0046 AM0113 Distribution of efficient light bulbs to households Distribution of compact fluorescent lamps (CFL) and light-emitting diode (LED) lamps to households AMS-II.C. Demand-side energy efficiency activities for specific technologies Demand-side activities for efficient lighting technologies AMS-II.N. Demand-side energy efficiency activities for installation of energy efficient lighting and/or controls in buildings AMS-III.AR. Substituting fossil fuel-based lighting with LED/CFL lighting systems
Street lighting	AMS-II.L. Demand-side activities for efficient outdoor and street lighting technologies
Whole building	AM0091 AMS-II.E. AMS-II.K. AMS-II.C. AMS-III.C. AMS-I
District heating/cooling	AM0044 Energy efficiency improvement projects - boiler rehabilitation or replacement in industrial and district heating sectors AM0058 Introduction of a district heating system AM0072 Fossil Fuel Displacement by Geothermal Resources for Space Heating AM0117 Introduction of a new district cooling system AMS-II.B. Supply side energy efficiency improvements – generation
Others/various technologies	AMS-II.C. Demand-side energy efficiency activities for specific technologies

${\tt TABLE\,3.} \quad {\tt LIST\,OF\,METHODOLOGIES\,RELEVANT\,TO\,URBAN\,WASTE\,MANAGEMENT\,AND\,WASTEWATER}$

Measure	CDM methodology
Alternative waste –composting	ACM0022 Alternative waste treatment processes AMS-III.F. AMS-III.AF. Avoidance of methane emissions through composting Avoidance of methane emissions through excavating and composting of partially decayed municipal solid waste (MSW)
Alternative waste treatment – other technologies	ACM0022 Alternative waste treatment processes Less carbon intensive power generation through continuous reductive distillation of waste AMS-III.E. AMS-III.E. Avoidance of methane production from decay of biomass through controlled combustion, gasification or mechanical/thermal treatment AMS-III.E. Avoidance of methane production from biomass decay through controlled pyrolysis Methane avoidance through separation of solids from wastewater or manure treatment systems AMS-III.BJ. Destruction of hazardous waste using plasma technology including energy recovery
Alternative waste treatment – aerobic	AM0083 Avoidance of landfill gas emissions by in-situ aeration of landfills AM0093 Avoidance of landfill gas emissions by passive aeration of landfills AMS-III.AX. Methane oxidation layer (MOL) for solid waste disposal sites
Landfill gas recovery	ACM0001 Flaring or use of landfill gas AMS-III.G. Landfill methane recovery
Lagoons and biodigester — biogas	ACM0014 Treatment of wastewater AMS-III.H. Methane recovery in wastewater treatment AMS-III.AO. Methane recovery through controlled anaerobic digestion
Manure treatment	AM0073 GHG emission reductions through multi-site manure collection and treatment in a central plan ACM0010 GHG emission reductions from manure management systems AMS-III.D. Methane recovery in animal manure management systems AMS-III.R. Methane recovery in agricultural activities at household/small farm level
Aerobic wastewater treatment	AM0080 Mitigation of greenhouse gases emissions with treatment of wastewater in aerobic wastewater treatment plants AMS-III.I. Avoidance of methane production in wastewater treatment through replacement of anaerobic systems by aerobic systems
Utilization of biogenic methane	ACM0024 Natural gas substitution by biogenic methane produced from the anaerobic digestion o organic waste AM0053 Biogenic methane injection to a natural gas distribution grid AM0069 Biogenic methane use as feedstock and fuel for town gas production AM0075 Methodology for collection, processing and supply of biogas to end-users for production of heat AMS-III.0. Hydrogen production using methane extracted from biogas
Recycling	AMS-III-AJ. Recovery and recycling of materials from solid wastes AMS-III-BA. Recovery and recycling of materials from E-waste

18.2. STANDARDIZATION OF PARAMETERS

- 6. In order to determine the parameter values required to estimate baseline, project and leakage emissions, the application of the methodologies identified in Section 1.8.1. may require data collection and surveys to be undertaken, which can be complex and time consuming. In order to simplify this process, a standardized baseline process has been set up, whereby a host country Designated National Authority (DNA) may submit proposals for
- standardized baselines. A wide range of parameters in these methodologies could be standardized by taking a region/country-specific approach for a sector. This could facilitate the cost-effectiveness and scalability of CDM PoAs in the urban sector.
- 7. The table below includes examples of parameters that could potentially be standardized, in accordance with the "Procedure for the development, revision, clarification and update of standardized baselines"

TABLE 4. EXAMPLES OF PARAMETERS THAT MAY BE STANDARDIZED

Sector/Measure	CDM metho	odology / tool	Parameters	Possible data sources for standardization of parameters
Electricity generation	T00L07	Tool to calculate the emission factor for an electricity system	CO ₂ emission factor of the electricity system	Official report/statistics
Energy-efficient refrigerators and air-conditioners	TOOL29	Determination of standardized baselines for energy-efficient refrigerators and air- conditioners	Baseline energy consumption	See requirements in TOOL29
Energy efficiency measures in buildings	T00L31	Determination of standardized baselines for energy efficiency measures in residential, commercial and institutional buildings	CO, emissions per m² for different building categories	Surveys
Energy-efficient Lighting	AMS-II.C.	Demand-side energy efficiency activities for specific technologies Demand-side activities for efficient lighting technologies	Utilization hours	Surveys, peer-reviewed literature, official reports/statistics, etc.
Solid Waste	AMS-III.G. ACM0001 TOOL04	Landfill methane recovery Flaring or use of landfill gas Emissions from solid waste	Waste composition	Test results, peer-reviewed literature, official reports/statistics, etc.
	100204	disposal sites	Legal requirements to destroy methane as part of regular operation of landfills	Local regulations/legislation
Cooking	AMS-I.E.	Switch from non-renewable biomass for thermal applications by the user Energy efficiency measures in thermal applications of non- renewable biomass	Baseline woody biomass consumption	Surveys, peer-reviewed literature, official reports/statistics, etc.
Non-renewable biomass	TOOL30	Calculation of the fraction of non-renewable biomass	Fraction of non-renewable biomass	See requirements in TOOL30
Transport	ACM0016 AM0031 TOOL18	Mass Rapid Transit Projects Bus rapid transit projects Baseline emissions for modal shift measures in urban passenger transport	Specific CO ₂ emissions per passenger-kilometer transported in the baseline	Surveys, official reports/statistics, etc.
	AMS-III.AY.	Introduction of LNG buses to existing and new bus routes	Specific fuel consumption of baseline buses	Official report/statistics
AMS-III.BM	Lightweight two and three wheeled personal transportation	CO ₂ emission factor per passenger-kilometer corresponding to public transportation-mix in the city	Peer-reviewed literature, official reports, statistics	

19. INTRODUCTION TO METHODOLOGY SUMMARY SHEETS

The methodology summary sheets are distinguished as being for large-scale and small-scale CDM project activities, as well as large-scale and small-scale A/R CDM project activities. Each methodology summary sheet has the sections as follows:

TYPICAL PROJECT(S) APPLICABLE TO THE METHODOLOGY

Project activities for which the methodology is applicable are described. Practical examples are mentioned for better understanding of the purpose of the specific methodology

TYPE(S) OF GHG EMISSION MITIGATION ACTION

This refers to the type of mitigation activity presented in the methodology categorization table (section 1.2. above). The type of mitigation action, such as fuel switch or energy efficiency, is briefly describe

IMPORTANT CONDITIONS UNDER WHICH THE METHODOLOGY IS APPLICABLE

Methodologies are only applicable under particular conditions and the most relevant conditions are listed in this section. However, not all conditions can be listed and it is important to consult the full text of each methodology.

IMPORTANT PARAMETERS THAT NEED TO BE DETERMINED OR MONITORED

In order to calculate emission reductions or net removals of a project activity, certain parameters have to be determined at the beginning when the project activity is validated and various parameters have to be monitored during the operation of the project activity. Therefore this section is divided into parameters "at validation" and parameters "monitored". In addition, some methodologies require checking of specific conditions or parameters to prove that applicability conditions are met.

VISUAL DESCRIPTION OF BASELINE AND PROJECT SCENARIOS

An important feature of the booklet is the use of diagrams made of icons to illustrate the baseline and project scenarios. These diagrams enable readers to quickly grasp the scope of the methodology.


The baseline scenario represents the situation that would occur in the absence of the project activity. The project scenario refers to the situation that is achieved by the implementation of the project activity. Complex scenarios cannot be displayed by a simplified diagram. Therefore, the simplified diagrams focus on the main activity that results in emission reductions or net removals. The diagrams do not replace the necessity to consult the full methodology text.


A list of icons used in the booklet is given in chapter II. Some exemplifications of diagrams are presented below

EXEMPLIFICATION OF DIAGRAMS

Energy Production GHG	Full intensity in the baseline scenario is depicted with bold colour.
Energy Production GHG	Reduced, decreased intensity in the project activity is depicted with pale colour.
Energy Production GHG	Avoidance and replacement is depicted with crossed icons.
Fossil fuel	A carbon-intensive fossil fuel is used in the baseline scenario.
Fossil fuel Fossil fuel	Instead of the carbon-intensive fossil fuel, a less-carbon-intensive fossil fuel is used due to the project activity.
Technology	A less-efficient technology is used in the baseline scenario.
Upgrade	A more-efficient technology is used due to the project activity.
GHG GHG	Activities in the baseline scenario result in GHG emissions.
	Less GHG emissions are occurring due to the project activity.

EXEMPLIFICATION OF DIAGRAMS

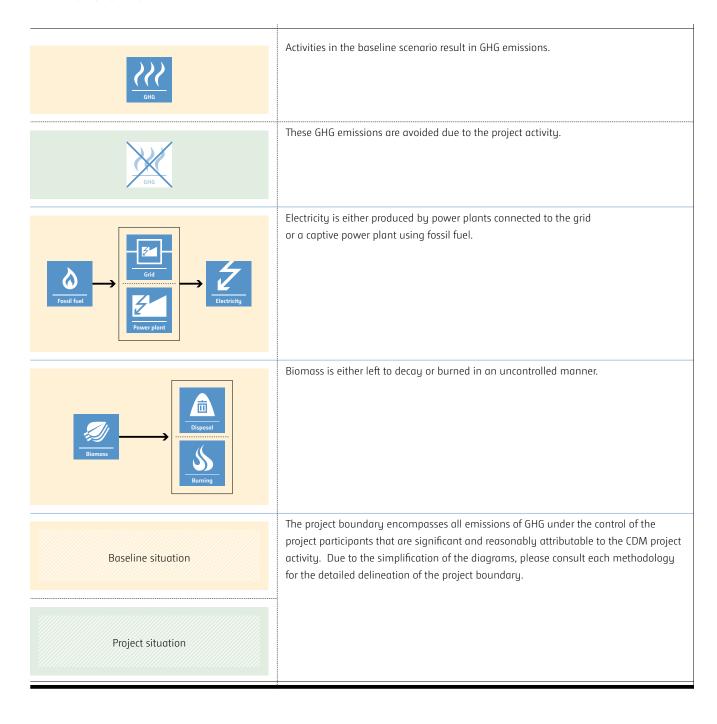

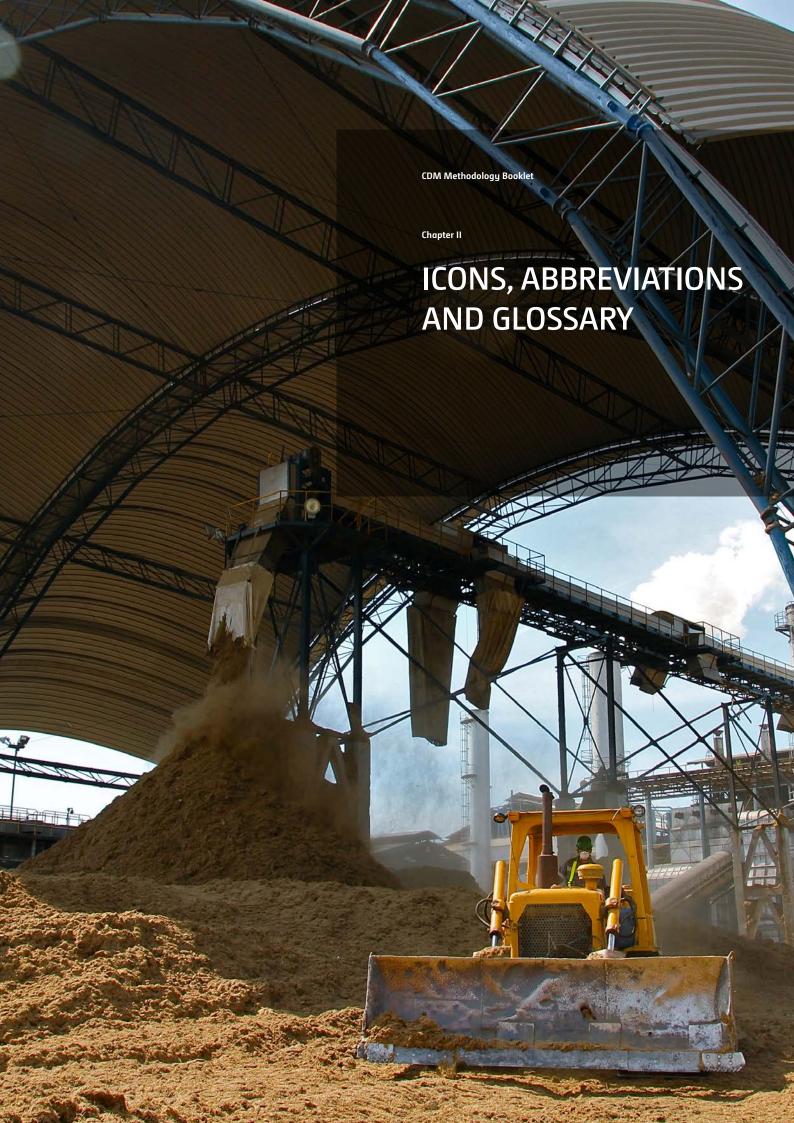

United Nations

Framework Convention on Climate Chanae

2.1 ICONS USED IN THIS BOOKLET



Afforestation/reforestation areas

Small afforestation/reforestation areas.



Agricultural activity

Production of crops or livestock.



Agricultural land

Land with crops on solid ground. Also plantations not meeting definition of forest.



Air



Airplane

Any kind of airplane-based transport.



Animal grazing

Grazing livestock in pasture land or any other land.



Bicycle

Bicycles, e-bikes and Tricycles



Biomass

Unless stated otherwise, renewable biomass is implied. Types of biomass include residues, plant oil, wood.



Buildings

Any kind of building.



Burning

Uncontrolled burning of biomass, flaring or venting of waste gas.



Bus

Any kind of bus-based transport.



Bus route

Any route where buses drive, from the origin to the final stop.



Car

Any kind of car-based transport.



Catalysis

Catalysis of substances (i.e. GHGs) in order to convert them into substances with less or no GWP.



Cement

Products such as clinker, cement, lime or bricks.



Charcoal production

Charcoal production activity.



Commercial Consumer

Commercial consumer, e.g. industrial or institutional consumer.



Consumer

Residential or commercial consumer.



Contaminated land

May indicate chemically polluted land (e.g. mine spoils) or naturally hostile land (e.g. naturally occurring salinity or alkalinity). The specific type is shown in the icon caption.



Controlled burning

Any kind of combustion or decomposition in a controlled manner to dispose combustible substances. Also combustion to produce feedstock such as CO_2 or heat.



Cooling



Data centre



Disposal

Any kind of disposal. E.g. landfilling.

Icons used in this booklet

Framework Convention on Climate Change



Drinking water



Electricity



Electricity distribution grid

This icon is used to depict an electricity distribution system and is used when generated electricity is/ has to be supplied to the electricity grid or if the project activity occurs directly within the electricity distribution system.



Electricity grid

This icon is used to depict all (fossil-fuel-fired) power plants connected and providing electricity to the grid (e.g. national or regional grid).



Energy

Any kind of energy. This icon is used, if different types of energy are depicted. E.g. electricity, heat, steam or mechanical energy.



Energy distribution system

Any kind of energy distribution system. E.g. electricity grid or heat distribution system.



Energy generation

Any kind of plant, facility or equipment used to generate energy. This icon represents any co- or tri-generation system as well as systems to provide mechanical energy. The icon is also used, if either electricity or heat are produced.



Exploitation

Any kind of exploitation activity such as mining activities, oil and gas production.



Fixation of CO₂ in Biomass

Fixation of atmospheric CO₂ from the atmosphere in biomass through the process of photosynthesis



Fossil fuel

Any kind of fossil fuel used for combustion. Can be gaseous, liquid or solid. E.g. natural gas, fuel oil, coal.



Fuelwood collection

Collecting fuelwood without full-tree harvest.



Gas

Any kind of combustible gas. E.g. natural gas, methane, biogas, landfill gas.



Gas distribution system

Any kind of gas distribution system. E.g. natural gas pipeline system.



Grassland

Grass on ground without cracks.



Greenhouse gas emissions

Emissions of greenhouse gases, i.e.:

Carbon dioxide (CO₂)

Hydrofluorocarbons (HFCs)

Methane (CH₄)

Methane-rich vapours (CH₄ & HCs)

Nitrous oxide (N₂O)

Perfluorocarbons (PFCs)

Sulphur hexafluoride (SF₆).

Where applicable, the specific GHG is presented in the icon caption.



Harvesting

Harvesting activity.



Any kind of thermal energy. E.g. steam, hot air, hot water.



Heat distribution system

Any kind of heat distribution system. E.g. steam system, district heating system.



Heat generation

Any kind of plant, facility or equipment used to generate heat. This includes fossil-fuel-fired boilers to generate steam, incinerators, but also small applications such as radiators, cookers and ovens.



Hybrid mini-grid



Input or output material

Any kind of material. Can be gaseous, liquid or solid. E.g. raw materials, substances used for production, products such as plastics. This icon is also used if a GHG such as CO_2 is used as feedstock.



Input or output material storage tank

Storage of any kind of material.



Land application

The material (e.g. sludge) is applied to land.



Less-carbon-intensive fossil fuel

Any kind of less-carbon-intensive fossil fuel used for combustion. E.g. natural gas.



Lighting

Any kind of lighting equipment such as incandescent light bulbs, compact florescent lamps.



Livestock

Any kind of livestock.



Losses

Any kind of losses from leaks in pipe systems and other distribution systems.



Manure

Manure from livestock.



Mechanical energy



Milk production



Mini grid



Motorcycle

Any kind of motorcycle-based transport.



Oil

Oil of fossil origin. E.g. crude oil.



Planting or seeding

Afforestation/reforestation activity by planting, seeding or other measures.



Power plant

Any kind of plant, facility or equipment used to produce electricity. This includes fossil-fuel-fired power plants, renewable power plants such as hydro power plants, but also (small) photovoltaic systems.



Production

The output of the production can be specified in the icon caption. E.g. aluminium, iron, cement, refrigerators.



Refrigerant

Refrigerant that contains HFC.



Refrigerators and chillers

Any kind of refrigerator or chiller.



Release

Any kind of release of substances or energy without using the substance or the energy content of the substances.



Renewables



Residential Consumer

Residential consumer, e.g. households.



Sand dunes or barren land

Sand dunes or barren land without vegetation.



Seeds

Any type of seeds.

Icons used in this booklet

35



Framework Convention on

Climate Change

Settlement land

Land within settlements (parks, lawns, etc.) or along infrastructure (roads, powerlines, railways, waterways, etc.).



Ship

Any kind of transport based on ships or barges.



Shrub and/or single tree vegetation

Non-forest woody vegetation: shrubs and single trees on "solid" ground (without cracks).



Suppressed demand

Methodologies that address the issue of suppressed demand.



Technology

Any kind of technology, equipment, appliance.



Train

Any kind of train-based transport.



Transformer



Transmission line



Treatment

Any kind of treatment of waste or materials, e.g. production of RDF from municipal waste.



Treatment

Any kind of treatment of wastewater or manure, e.g. lagoons, pits, aerobic treatment systems.



Truck

Any kind of truck-based transport.





Any type of upgrade. Can be retrofitting of existing equipment or installation of more-advanced technology to displace existing less-advanced equipment. E.g. replacement of incandescent light bulbs by compact fluorescent lamps. Also applicable to upgrade agricultural activity processes.



Waste

Any kind of waste. Can be gaseous, liquid or solid. The specific substance can be specified in the icon caption.



Water

Any kind of water. E.g. drinking water, waste water.



Wetland

Lands with wet to moist soil, e.g. swamp or peatland.



Women and children

Project activities using these methodologies have a particular potential to directly improve the lives of women and children.

United NationsFramework Convention on Climate Change

2.2. ABBREVIATIONS USED IN THIS BOOKLET

Per cent
Degree Celsius
Afforestation/ Reforestation
Acrylonitrile Butadiene Styrene
Approved Consolidated Methodology
Aluminium
Approved Methodology
Alternative Raw Materials That Do Not Contain Carbonates
Approved Methodology for Small-scale CDM project activities
Ammonia-Plant Off Gas
Ammonia Oxidation Reactor
Auxiliary Power Unit
Blended Cement
Building Energy Management Systems
CDM Executive Board (also referred to as EB)
Bus Rapid Transit
Baseline Sample Group
Hexafluoroethane
Octafluoropropane
Octafluorocyclobutane
Calcium Carbonate
Trigeneration (Combined Cooling, Heating and Power
generation)
Cooling Degree Days
Clean Development Mechanism
Carbon Dioxide Recovery
Cold Direct Reduced Iron
Certified Emission Reduction
Perfluoro-2-methyl-3-pentanone
Tetrafluoromethane
Chlorofluorocarbons
Compact Fluorescent Lamps
Difluoromethane
Fluoromethane
Methane
Fluoroform
Cogeneration (Combined Heat and Power generation)
Chlorine Gas
Combined Margin
Compressed Natural Gas
Carbon Dioxide
Chemical Oxygen Demand
Coke Oven Gas
Coefficient of Performance CDM Project Activity

CSP	Concentrating Solar Power
CVD	Chemical Vapour Deposition
CWPB	Centre Worked Pre-Baked
DC	Direct Current
DME	Dimethyl ether
DMI	Dry Matter Intake
DOE	Designated Operational Entity
DOM	Dead Organic Matter
DPM	Dynamic Power Management
DRI	Direct Reduced Iron
DSS	
DWW	Decision Support System Dewatered Wastewater
EAF	Electric Arc Furnace
ELT	End of Life Tyres
FF	Frost Free
fNRB	Fraction of Non-Renewable Biomass
GE	Gross Energy
GHG	Greenhouse Gas
GIEE	Gas Insulated Electrical Equipment
GIS	Geographic Information System
GPF	Gas Processing Facilities
GWh	Gigawatthours
GWP	Global Warming Potential
H ₂	Hydrogen
HCI	Hydrogen Chloride
HCs	Hydrocarbons
HDD	Heating Degree Days
HDPE	High Density Polyethylene
HDRI	Hot Direct Reduced Iron
HDS	Hydrodesulphurization Process
HFC	Hydrofluorocarbon
HIPS	High Impact Polystyrene
HPO (process)	Hydroylamin-Phosphat-Oxim (process)
HRSG	Heat Recovery Steam Generator
HSR	High Speed Rail
HSS	Horizontal Stud Soederberg
HSTs	Hydrocarbon storage tanks
HVAC	Heating, Ventilation and Air Conditioning
HVDC	High Voltage Direct Current
IAI	International Aluminium Institute
ICL	Incandescent Lamps
IEC	International Electronic Commission
IG	Intermediate Gas
IPCC	Intergovernmental Panel on Climate Change
ISCC	Integrated Solar Combined Cycle
ISO	International Organization for Standardization
ITS	Intelligent Transportation Systems
kg	Kilogramme
km	Kilometre
kV	Kilovolt
kWh	Kilowatt Hour
kt	Kiloton
LCD	Liquid Crystal Display
LDPE	Low Density Polyethylene
	<u> </u>

Chaptername Xxxzz, Sample Text Secont Line Lorem Ipsum Dolore

LED	Light-Emitting Diode
LFG	Landfill gas
LNG	Liquefied Natural Gas
LHV	Lower Heating Value
LPG	Liquefied Petroleum Gas
LSC	Large-scale
m	Metre
m²	Square metre
m³	Cubic metre
MgCO ₃	Magnesium Carbonate
mm	Millimetre
MOL	Methane Oxidation Layer
MRG	Methane Rich Gas
MRTS	Mass Rapid Transit System
MSW	Municipal Solid Waste
MW	Megawatt
N ₂ O	Nitrous Oxide
NCV	Net Calorific Value
NMHCs	Non-methane hydrocarbons
NUE	Nitrogen Use Efficient
ODP	Ozone Depleting Potential
PD	Project Devices
PDD	Project Design Document
PET	Polyethylene Terephthalate
PFC	Perfluorocarbon
PFPB	Point Feeder Pre-Baked
pkm	Passenger-Kilometer
PoA	Programme of Activities
PoA-DD	Programme of Activities Design Document
PP	Polypropylene
PSG	Project Sample Group
P-U	Power-Voltage (characteristic curve)
PUF	Polyurethane Foam
PV	Photovoltaic
RDF	Refuse-Derived Fuel
RHF	Rotary Hearth Furnace
SB	Stabilized Biomass
SDW	Safe Drinking Water
SF ₆	Sulphur Hexafluoride
SiMn	Silicomanganese
SME	Small and Medium Enterprises
SMMEs	Small, Medium and Micro Enterprises
SO ₂	Sulphur Dioxide
SOC	Soil Organic Carbon
SSC	Small-scale
STG	Steam Turbine Generator
SWDS	Solid Waste Disposal Site
SWH	Solar Water Heating
SWPB	Side Worked Pre-Baked
TG	Tailgas
	Total Organic Carbon
TDA	
TPA	Total Project Area
VAM	Ventilation Air Methane
VRUs	Vapour Recovery Units

VSS	Vertical Stud Soederberg
W	Watt

United NationsFramework Convention on Climate Change

2.3. GLOSSARY

Explanations on general terminologies used in this booklet are listed below. More definitions are given in the Glossary of CDM terms. For terminologies specific to a certain methodology, please refer to the definition section of the respective methodology available at https://cdm.unfccc.int/methodologies/index.html.

Above-ground biomass ⁵	All living biomass above the soil including stem, stump, branches, bark, seeds, and foliage as well as herbaceous vegetation.
Additional/Additionality	For a CDM project activity (non-A/R) or CPA (non-A/R), the effect of the CDM project activity or CPA to reduce anthropogenic GHG emissions below the level that would have occurred in the absence of the CDM project activity or CPA; or
	For an A/R or SSC A/R CDM project activity or CPA (A/R), the effect of the A/R or SSC A/R CDM project activity or CPA (A/R) to increase actual net GHG removals by sinks above the sum of the changes in carbon stocks in the carbon pools within the project boundary that would have occurred in the absence of the A/R or SSC A/R CDM project activity or CPA (A/R).
	Whether or not a CDM project activity or CPA is additional is determined in accordance with the CDM rules and requirements.
Afforestation	The direct human-induced conversion of land that has not been forested for a period of at least 50 years to forested land through planting, seeding and/or the human-induced promotion of natural seed sources.
Agroforestry	Growing of both trees and agricultural / horticultural crops on the same piece of land.
Allometric biomass equations	Regression equations calculating biomass based on measured parameters of a tree (or shrub), for example, quantifying the relationship between above-ground tree biomass and the diameter at breast height and tree height of a specific tree species.
Baseline scenario	For a CDM project activity (non-A/R) or CPA (non-A/R), the scenario for a CDM project activity or CPA that reasonably represents the anthropogenic emissions by sources of GHG that would occur in the absence of the proposed CDM project activity or CPA. For an A/R or SSC A/R CDM project activity or CPA (A/R), the scenario for an A/R or SSC A/R CDM project activity or CPA (A/R) that reasonably represents the sum of the changes in carbon stocks in the carbon
	pools within the project boundary that would occur in the absence of the A/R or SSC A/R CDM project activity or CPA (A/R).
Below-ground biomass ⁵	All living biomass of roots. Fine roots of less than (suggested) 2 mm diameter are oft en excluded because these oft en cannot be distinguished empirically from soil organic matter or litter.
Biomass expansion factor	Ratio of total stand biomass to stand (merchantable) volume (e.g. as derived from forest yield tables).
Biomass	Non-fossilized and biodegradable organic material originating from plants, animals and micro-organisms, including: (a) Biomass residue; (b) The non-fossilized and biodegradable organic fractions of industrial and municipal wastes; and (c) The gases and liquids recovered from the decomposition of non-fossilized and biodegradable organic material.
	i materiali

Glossary

Biomass, ⁶ renewable	Biomass which meets one of the following conditions:
	(a) The biomass originates from land areas that are forests where:
	(i) The land area remains a forest;
	(ii) Sustainable management practices are undertaken on these land areas to ensure, in particular, that
	the level of carbon stocks on these land areas does not systematically decrease over time (carbon
	stocks may temporarily decrease due to harvesting); and
	(iii) Any national or regional forestry and nature conservation regulations are complied with;
	(b) The biomass is woody biomass and originates from croplands and/or grasslands where:
	(i) The land area remains cropland and/or grasslands or is reverted to forest; and
	(ii) Sustainable management practices are undertaken on these land areas to ensure in particular that
	the level of carbonstocks on these land areas does not systematically decrease over time (carbon
	stocks may temporarily decrease due to harvesting); and
	(iii) Any national or regional forestry, agriculture and nature conservation regulations are complied with;
	(c) The biomass is non-woody biomass and originates from croplands and/or grasslands where:
	(i) The land area remains cropland and/or grasslands or is reverted to forest; and
	(ii) Sustainable management practices are undertaken on these land areas to ensure in particular that
	the level of carbon stocks on these land areas does not systematically decrease over time (carbon
	stocks may temporarily decrease due to harvesting); and
	(iii) Any national or regional forestry, agriculture and nature conservation regulations are complied with;
	(d) The biomass is a biomass residue and the use of that biomass residue in the CDM project activity
	does not involve a decrease of carbon pools, in particular dead wood, litter or soil organic carbon, on
	the land areas from which the biomass residues originate;
	(e) The biomass is the non-fossil fraction of an industrial or municipal waste.
Biomass, residues	Non-fossilized and biodegradable organic material originating from plants, animals and micro-organisms
	which is a by-product, residue or waste stream from agriculture, forestry and related industries.
Captive generation	Electricity generation in a power plant that supplies electricity only to consumer(s) and not to the
	electricity grid. The consumer(s) are either located directly at the site of the power plant or are connected
Carlan annuaturation	through dedicated electricity distribution line(s) with the power plant but not via the electricity grid.
Carbon sequestration	Carbon sequestration is defined as a biological, chemical or physical process of removing carbon from the
Cogeneration	atmosphere and depositing it in a reservoir. Simultaneous production of electricity and useful thermal energy in one process.
Deadwood ⁵	All non-living woody biomass not contained in the litter, either standing, lying on the ground, or in the
Dedawood	soil. Dead wood includes wood lying on the surface, dead roots, and stumps larger than or equal to 10
	cm in diameter or any other diameter used by the country.
Emission factor	Measure of the average amount of GHG emitted to the atmosphere by a specific process, fuel, equipment,
Zimission ractor	or source.
Energy efficiency	Energy efficiency is defined as the improvement in the service provided per unit power, for example,
- 33	project activities which increase unit output of traction, work, electricity, heat, light (or fuel) per
	MW input are energy efficiency project activities.
Feedstock	Gaseous, liquid or solid raw material used in manufacturing.
Forest	A minimum area of land of 0.05 –1.0 hectare with tree crown cover (or equivalent stocking level) of more
	than $10 - 30$ per cent with trees with the potential to reach a minimum height of $2 - 5$ metres at maturity
	in situ and may include:
	(a) Either closed forest formations where trees of various storeys and undergrowth cover a high
	proportion of the ground or open forest;
	(b) Young natural stands and all plantations which have yet to reach a crown density of 10–30 per cent
	or tree height of 2–5 metres;
	(c) Areas normally forming part of the forest area which are temporarily unstocked as a result of human
	intervention such as harvesting or natural causes but which are expected to revert to forest.
	The definition of forest becomes applicable to a Party when:
	(a) For an Annex I Party, the Party selects a single minimum tree crown cover value between 10 and 30 per
	cent, a single minimum land area value between 0.05 and 1 hectare and a single minimum tree height
	value between 2 and 5 metres, as provided under paragraph 16 of the Annex to decision 16/CMP.1;
	(b) For a non-Annex I Party, the Party selects a single minimum tree crown cover value between 10 and
	30 per cent, a single minimum land area value between 0.05 and 1 hectare and a single minimum tree
	height value between 2 and 5 metres, as provided under paragraph 8 of the Annex to decision 5/CMP.1.

Glossary

Fossil fuel	Fuels formed by natural resources such as anaerobic decomposition of buried dead organisms
(***)	(e.g. coal, oil, and natural gas).
Greenfield facility	The construction of a new facility at a location where previously no facility exists, for example,
orcennela raemity	construction of new power plant at a site where previously no power generation activity exists.
Greenhouse gas (GHG)	A greenhouse gas listed in Annex A to the Kyoto Protocol, unless otherwise specified in a particular
diceimouse gus (aria)	methodology.
Grid	The spatial extent of the power plants that are physically connected through transmission and distribution
	lines to the project activity (e.g. the renewable power plant location or the consumers where electricity is
	being saved) and that can be dispatched without significant transmission constraints.
Harvesting	Cutting and removal of trees from forests for timber or other uses. In sustainable forestry, harvesting is
	followed by planting or natural regeneration of the forest.
ndustrial gases	Greenhouse gases originating from chemical production processes that are not naturally occurring.
	In addition, N ₂ O from chemical production processes is included in this group of greenhouse gases.
and use, land-use change	A GHG inventory sector that covers emissions and removals of GHG resulting from direct
and forestry	human-induced land use, land-use change and forestry activities.
.eakage	For a CDM project activity (non-A/R) or PoA (non-A/R), the net change of anthropogenic emissions by
-	sources of GHG which occurs outside the project boundary, and which is measurable and attributable to
	the CDM project activity or PoA, as applicable.
	For an A/R or SSC A/R CDM project activity or PoA (A/R), the increase in GHG emissions by sources or
	decrease in carbon stock in carbon pools which occurs outside the boundary of an A/R or SSC A/R CDM
	project activity or PoA (A/R), as applicable, which is measurable and attributable to the A/R or SSC A/R
	CDM project activity or PoA (A/R), as applicable.
itter ⁵	Includes all non-living biomass with a diameter less than a minimum diameter chosen by the country
	(for example 10 cm), lying dead, in various states of decomposition above the mineral or organic soil. Th
	includes the litter, fumic, and humic layers. Live fine roots (of less than the suggested diameter limit for
	below-ground biomass) are included in litter where they cannot be distinguished from it empirically.
_ow-carbon electricity	Electricity that is generated using a less-GHG-intensive fuel than in the baseline (for example, electricity
-	generated using natural gas in the project is low carbon electricity, when coal is used in the baseline for
	electricity generation).
Merit order	A way of ranking existing power plants in ascending order of their short-run marginal costs of electricity
	generation, so that those with the lowest marginal costs are the first ones to be brought on line to meet
	demand and the plants with the highest marginal costs are the last to be brought on line.
Project boundary	For a CDM project activity (non-A/R) or CPA (non-A/R), the significant anthropogenic GHG emissions by
	sources under the control of the project participant that are reasonably attributable to the CDM project
	activity or CPA, as determined in accordance with the CDM rules and requirements.
	For an A/R or SSC A/R CDM project activity or CPA (A/R), geographically delineates the A/R or SSC A/R
	CDM project activity or CPA (A/R) under the control of the project participant as determined in accordance
	with the CDM rules and requirements.
Reforestation	The direct human-induced conversion of non-forested land to forested land through planting, seeding
	and/or the human-induced promotion of natural seed sources, on land that was forested but has been
	converted to non-forested land.
Renewable energy	Energy that comes from solar, wind, rain, tides, geothermal heat and biological sources which are
	renewable (naturally replenished) in nature.
Sectoral scope	The category of GHG source sectors or groups of activities that apply to CDM project activities or PoAs. It is
	based on the sectors and source categories set out in Annex A to the Kyoto Protocol. A CDM project activity
	or PoA may fall within more than one sectoral scope.
Soil organic carbon ⁵	Organic carbon in mineral and organic soils (including peat) to a specified depth chosen by the country
•	and applied consistently through the time series. Live fine roots (of less than the suggested diameter lim
	for below-ground biomass) are included with soil organic matter where they cannot be distinguished
	from it empirically.

Wetland

Standardized baseline	A baseline developed for a Party or a group of Parties, on a sub-national, national or group-of-countries
	basis rather than on a project basis, to facilitate the calculation of GHG emission reductions and removals
	by sinks and/or the determination of additionality for CDM project activities or PoAs, while providing
	assistance for assuring environmental integrity.
Suppressed demand	A scenario where future anthropogenic emissions by sources are projected to rise above current levels,
	due to the specific circumstances of the host Party.
Trigeneration	Simultaneous generation of electrical energy and thermal energy in the form of cooling and heating in
	one process.
Waste energy	Energy contained in a residual stream from industrial processes in the form of heat, chemical energy or
	pressure, for which it can be demonstrated that it would have been wasted in the absence of the project
	activity. Examples of waste energy include the energy contained in gases flared or released into the

atmosphere, the heat or pressure from a residual stream not recovered (i.e. wasted).

Area of land whose soil is saturated with moisture either permanently or seasonally.

Glossary

 $^{^5}$ According to Intergovernmental Panel on Climate Change Good Practice Guidance for Land Use, Land-Use Change and Forestry, table 3.2.1 on page 3.15

 $^{^{\}rm 6}$ In accordance with the A/R modalities and procedures.