

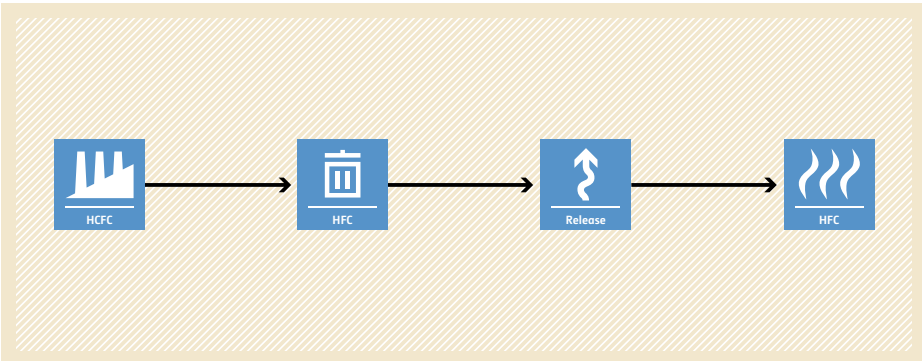
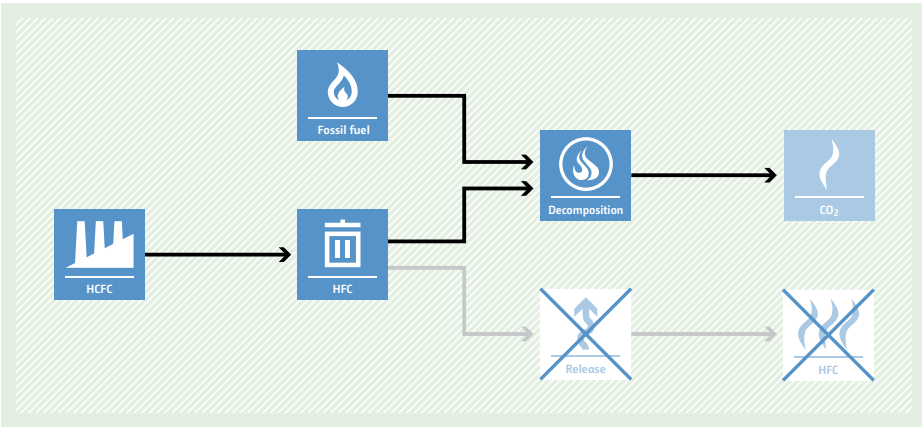
A low-angle photograph of a worker on a curved metal walkway of a large industrial tower against a blue sky. The worker is wearing a cap and work clothes, and is holding onto the metal railing. The walkway is made of a grid of metal bars, and the tower's surface is a smooth, light-colored metal. The sky is a clear, bright blue.

CDM Methodology Booklet

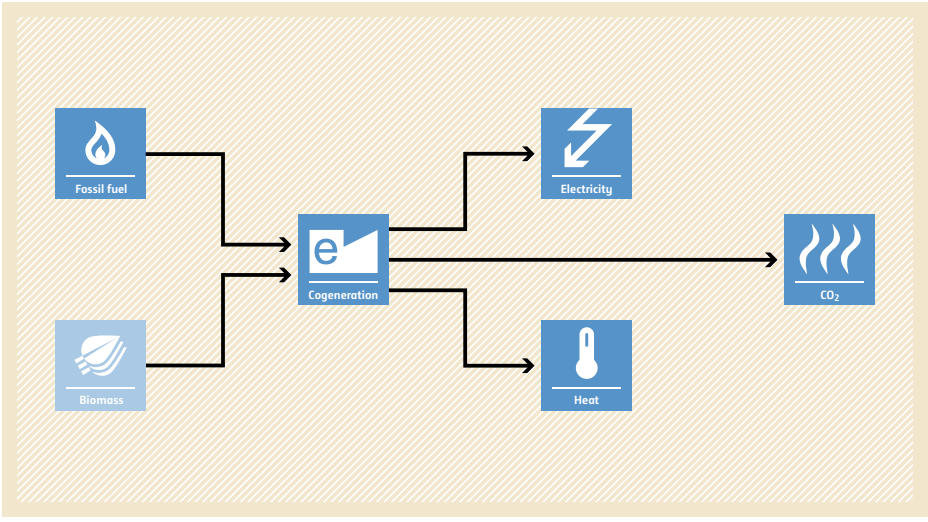
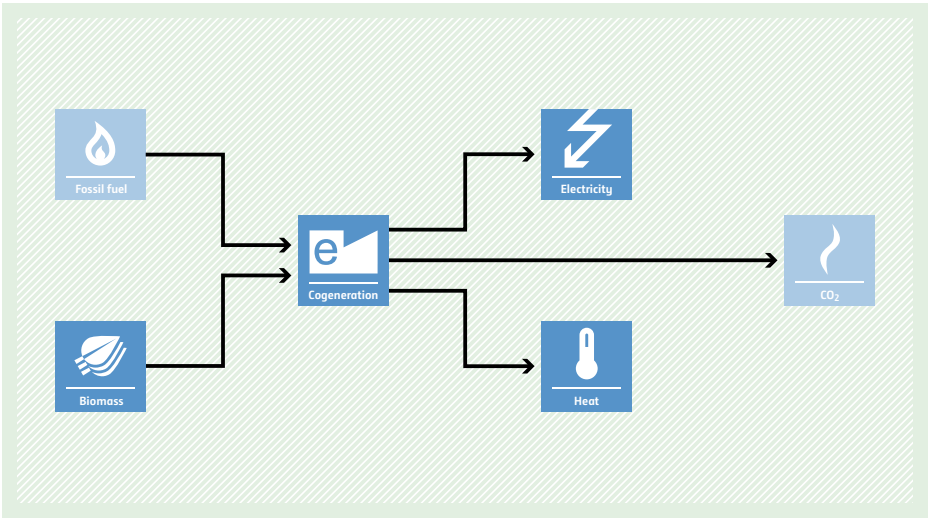
Chapter III

3.3. METHODOLOGIES FOR LARGE-SCALE CDM PROJECT ACTIVITIES

AM0001 Decomposition of fluoroform (HFC-23) waste streams

Typical project(s)	Project activities which capture and decompose HFC-23 formed in the production of HCFC-22.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • GHG destruction. Destruction of HFC-23 emissions.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • At least one HCFC-22 reaction unit at the project activity site has an operating history of at least three years between 1 January 2000 and 31 December 2004 and has been in operation from 2005 until the start of the project activity; • The HFC-23 decomposition and, if applicable, any temporary storage of HFC-23, occurs only at the project activity site (i.e. no off-site transport occurs); • No regulation requires the decomposition of the total amount of HFC-23 generated; • No HFC-23 decomposition facility was installed prior to implementation of the project activity.
Important parameters	At validation: <ul style="list-style-type: none"> • Average annual HCFC-22 equivalent production level in specific HCFC-22 production line in the historical three year period from 2002 to 2004; • Quantities of carbon and fluorine contained in hydrogen fluoride fed into HCFC-22 reactor units and in the HCFC-22 produced by specific production line, required for fluorine and carbon mass balance to determine the HFC-23 waste generation rate for years prior to the implementation of the project activity.
	Monitored: <ul style="list-style-type: none"> • Quantity of HFC-23 generated as a by-product in specific HCFC-22 production line in specific monitoring period; • Quantity of HFC-23 that is generated as a by-product in HCFC-22 production lines that are eligible for crediting and that is supplied to the inlet of the HFC-23 decomposition facility(ies) d in specific monitoring period.
BASELINE SCENARIO HFC-23 is released to the atmosphere from the production of HCFC-22.	 <p>The baseline scenario flowchart shows a linear process: HCFC production (factory icon) leads to HFC waste (trash can icon), which is then released (upward arrow icon) into the atmosphere as HFC emissions (flame icon).</p>
PROJECT SCENARIO HFC-23 emitted from the production of HCFC-22 is decomposed using fossil fuel in a decomposition facility, resulting into CO ₂ emissions.	 <p>The project scenario flowchart shows HCFC production (factory icon) leading to HFC waste (trash can icon). This waste is then fed into a decomposition facility (flame icon) which also receives fossil fuel (flame icon). The decomposition facility produces CO₂ emissions (flame icon) and prevents the HFC from being released (crossed-out upward arrow icon) into the atmosphere as HFC emissions (crossed-out flame icon).</p>

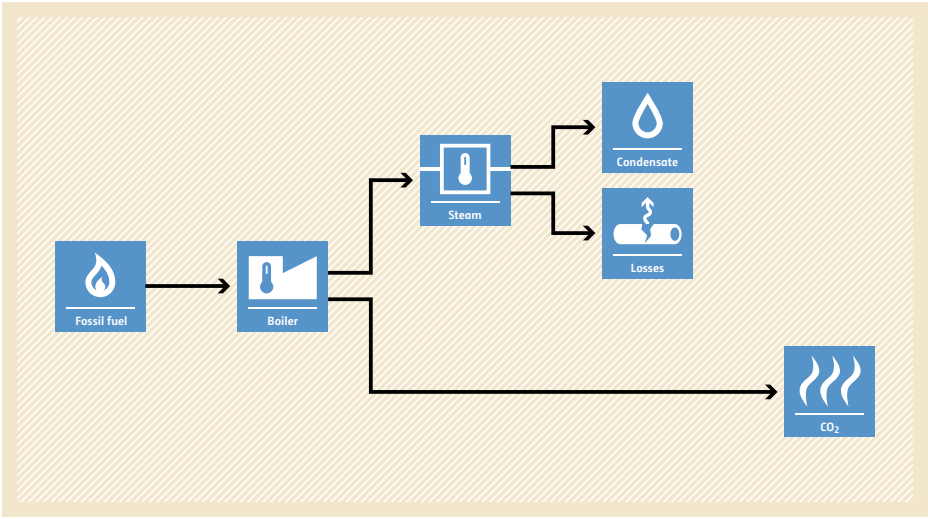
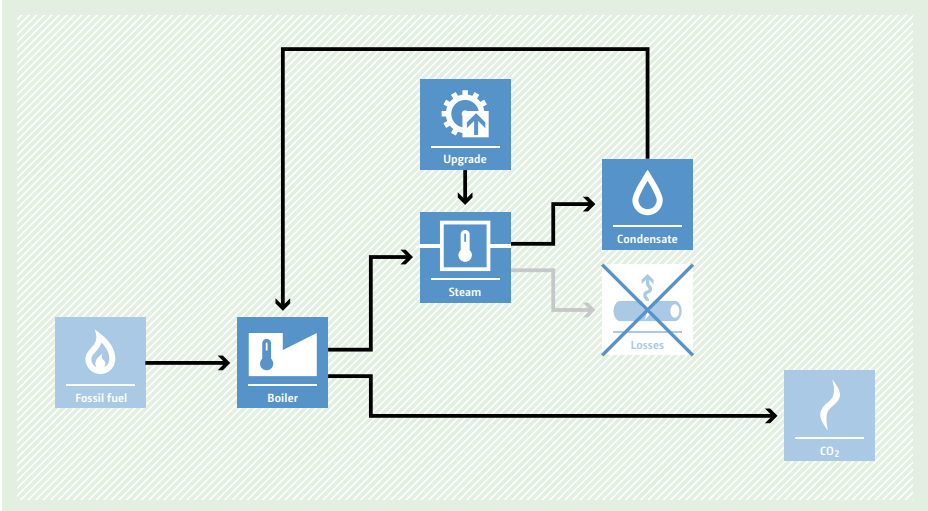
AM0007 Analysis of the least-cost fuel option for seasonally-operating biomass cogeneration plants

<p>Typical project(s)</p>	<p>Refurbishment and fuel switch of renewable biomass cogeneration projects connected to the grid which operate in seasonal mode and use other fuel during the off-season, when biomass – for instance bagasse in case of a sugar mill – is not being produced.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable Energy. Displacement of more-GHG-intensive power generation using fossil fuel.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The proposed project has access to biomass that is not currently used for energy purposes.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Leakage emissions due to biomass transport and crowding out of biomass for other plants; • Baseline emission factor of the cogeneration plant based on the use of the least-cost fuel available (usually fossil fuel). <p>Monitored:</p> <ul style="list-style-type: none"> • Power generated by the project; • Quantity of biomass used in the project; • Electricity and fossil fuel consumption of the project.
<p>BASILINE SCENARIO Power would be produced with the least cost fuel (usually fossil fuels) in the absence of the project.</p>	 <p>The diagram illustrates the baseline scenario. It features a central 'Cogeneration' box with an 'e' icon. Two input boxes on the left, 'Fossil fuel' (flame icon) and 'Biomass' (leaf icon), have arrows pointing to the 'Cogeneration' box. From the 'Cogeneration' box, three arrows point to output boxes: 'Electricity' (lightning bolt icon), 'Heat' (thermometer icon), and 'CO2' (flame icon). The entire diagram is set against a light orange background with a diagonal line pattern.</p>
<p>PROJECT SCENARIO Use of renewable biomass for power generation avoids the use of fossil fuel.</p>	 <p>The diagram illustrates the project scenario. It features a central 'Cogeneration' box with an 'e' icon. Only one input box on the left, 'Biomass' (leaf icon), has an arrow pointing to the 'Cogeneration' box. The 'Fossil fuel' input box is present but has no arrow. From the 'Cogeneration' box, three arrows point to output boxes: 'Electricity' (lightning bolt icon), 'Heat' (thermometer icon), and 'CO2' (flame icon). The entire diagram is set against a light green background with a diagonal line pattern.</p>

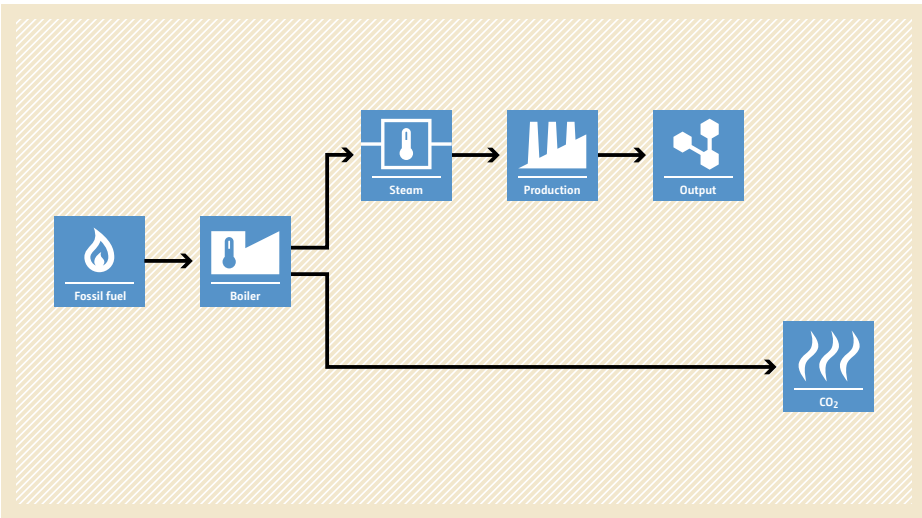
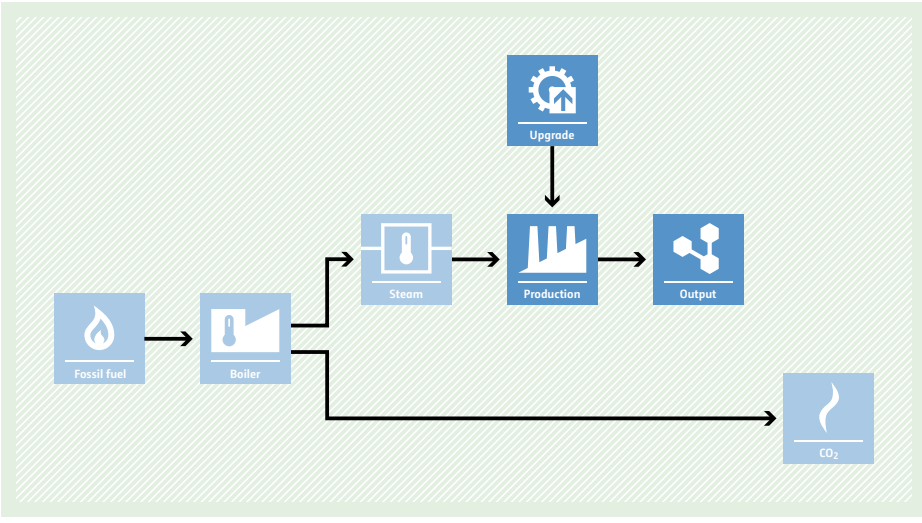
AM0009 Recovery and utilization of gas from oil fields that would otherwise be flared or vented

<p>Typical project(s)</p>	<p>Associated gas from oil fields (including gas-lift gas) that was previously flared or vented is recovered and utilized.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Fuel switch. <p>Displacement of use of other fossil fuel sources such as natural gas, dry gas, LPG, condensate etc. coming from non-associated gas by utilizing associated gas and/or gas-lift gas from oil fields.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> The recovered gas comes from oil wells that are in operation and are producing oil at the time of the recovery; The recovered gas is transported to a gas pipeline with or without prior processing. Prior processing may include transportation to a processing plant where the recovered gas is processed into hydrocarbon products (e.g. dry gas, liquefied petroleum gas (LPG)). The dry natural gas is either: (i) transported to a gas pipeline directly; or (ii) compressed to CNG first, then transported by trailers/trucks/carriers and then decompressed again.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> Quantity and net calorific value of the total recovered gas measured after pre-treatment and after the point where the recovered gas is directed for on-site use.
<p>BASELINE SCENARIO Associated gas from oil wells is flared or vented and non-associated gas is extracted from other gas wells.</p>	
<p>PROJECT SCENARIO Associated gas from oil wells is recovered and utilized and non-associated gas is not extracted from other gas wells.</p>	

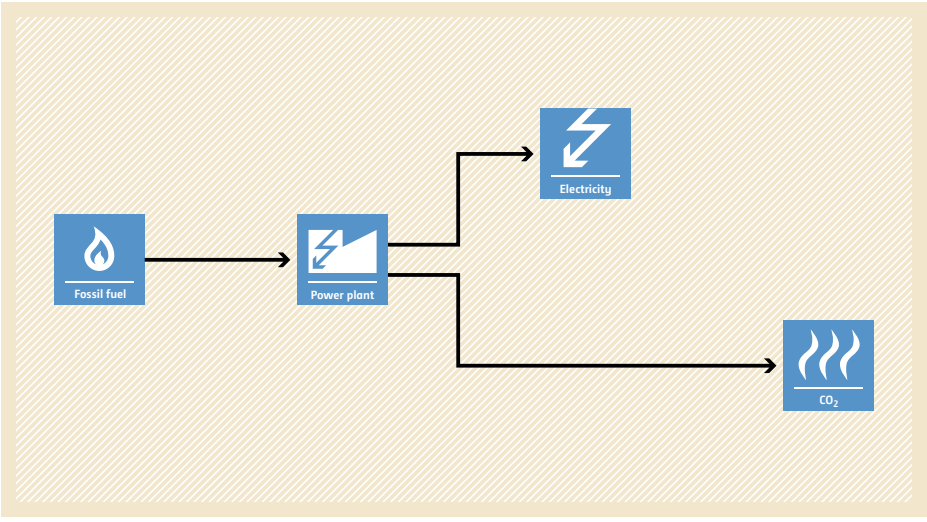
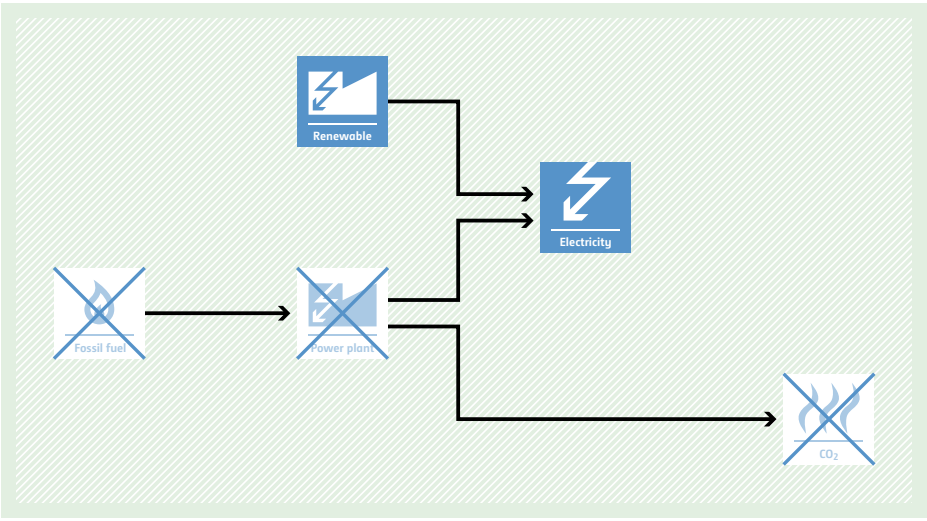
AM0017 Steam system efficiency improvements by replacing steam traps and returning condensate

<p>Typical project(s)</p>	<p>Optimization of steam distribution, end-use and condensate return to increase the energy efficiency of a steam system.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Reduction of fossil fuel use and corresponding emissions through energy efficiency improvements.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Steam is generated in a boiler fired with fossil fuel; • The regular maintenance of steam traps or the return of condensate is not common practice or required under regulations in the respective country; • Data on the condition of steam traps and the return of condensate is accessible in at least five other similar plants.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Steam trap failure rate and condensate return at plant and other similar plants. <p>Monitored:</p> <ul style="list-style-type: none"> • Steam and condensate flow, temperature and pressure; • Boiler efficiency; • Electricity consumption of the project.
<p>BASELINE SCENARIO Use of fossil fuel in a boiler to supply steam to a steam system with a low efficiency.</p>	 <p>The diagram illustrates the baseline scenario. It shows a flow from 'Fossil fuel' to a 'Boiler'. From the boiler, steam is sent to a 'Steam' icon. From the steam icon, one path leads to 'Condensate' and another leads to 'Losses' (represented by a broken steam trap icon). The boiler also has a direct path to 'CO2' emissions. This represents a system with low efficiency and high emissions.</p>
<p>PROJECT SCENARIO Use of less fossil fuel in a boiler as less steam is required for the steam system with improved efficiency.</p>	 <p>The diagram illustrates the project scenario. It shows the same boiler system as the baseline, but with an 'Upgrade' icon (a gear with an upward arrow) pointing to the steam line. The condensate is now returned to the boiler, and the 'Losses' icon is crossed out with a large 'X'. This indicates that the system is more efficient, requiring less steam and thus less fossil fuel, which results in lower CO2 emissions.</p>

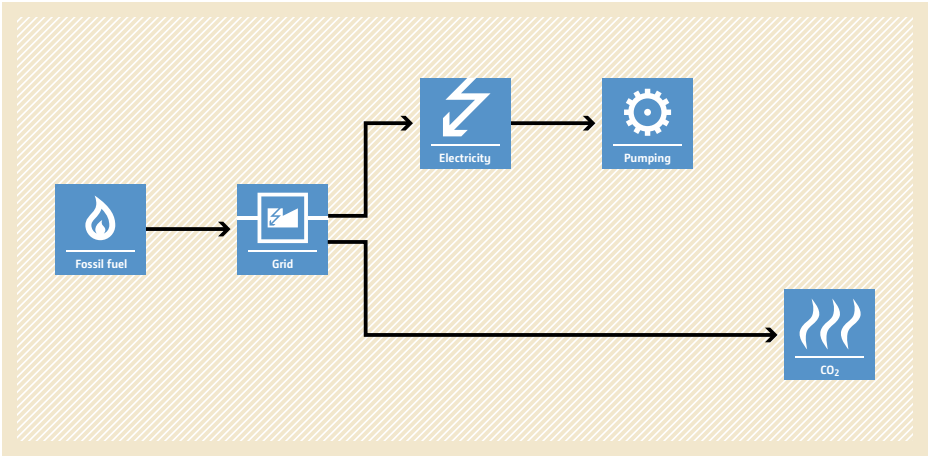
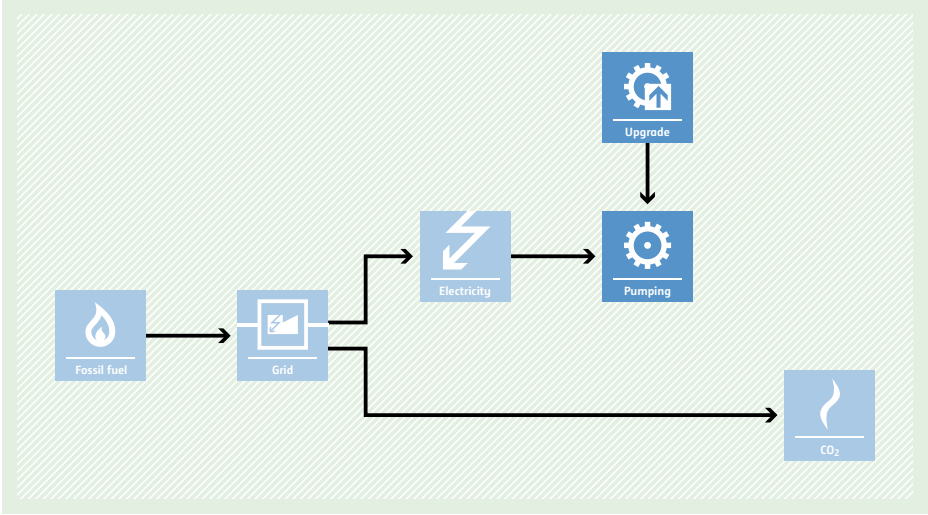
AM0018 Baseline methodology for steam optimization systems

<p>Typical project(s)</p>	<p>More-efficient use of steam in a production process reduces steam consumption and thereby steam generation.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Reduction of fossil fuel use and corresponding emissions through energy efficiency improvements.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The process supplied by the heat system produces a homogeneous output and its production volume is reasonably constant under steady state conditions; • For cogeneration systems, steam generation at boiler decreases by the amount of steam saved; • If the steam saved is further used, it shall be demonstrated it does not increase GHG emissions.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Output of the main process involved in the project; • Steam, feed water, blow down water flow, temperature and pressure; • Boiler efficiency.
<p>BASELINE SCENARIO Use of fossil fuel in a boiler to supply steam to a process with high steam consumption.</p>	 <p>The diagram illustrates the baseline scenario. It shows a flow starting from 'Fossil fuel' (represented by a flame icon) entering a 'Boiler' (represented by a boiler icon). From the boiler, two paths emerge: one leading to 'Steam' (represented by a steam icon), which then flows into 'Production' (represented by a factory icon), resulting in 'Output' (represented by a gear icon); the other path from the boiler leads directly to 'CO2' emissions (represented by a flame icon with wavy lines).</p>
<p>PROJECT SCENARIO Use of less fossil fuel in a boiler as less steam is required for the process with a higher efficiency.</p>	 <p>The diagram illustrates the project scenario. It shows a flow starting from 'Fossil fuel' (represented by a flame icon) entering a 'Boiler' (represented by a boiler icon). From the boiler, two paths emerge: one leading to 'Steam' (represented by a steam icon), which then flows into 'Production' (represented by a factory icon), resulting in 'Output' (represented by a gear icon); the other path from the boiler leads directly to 'CO2' emissions (represented by a flame icon with wavy lines). An 'Upgrade' (represented by a gear icon with a plus sign) is shown as an input to the 'Production' process, indicating that the process becomes more efficient and requires less steam.</p>

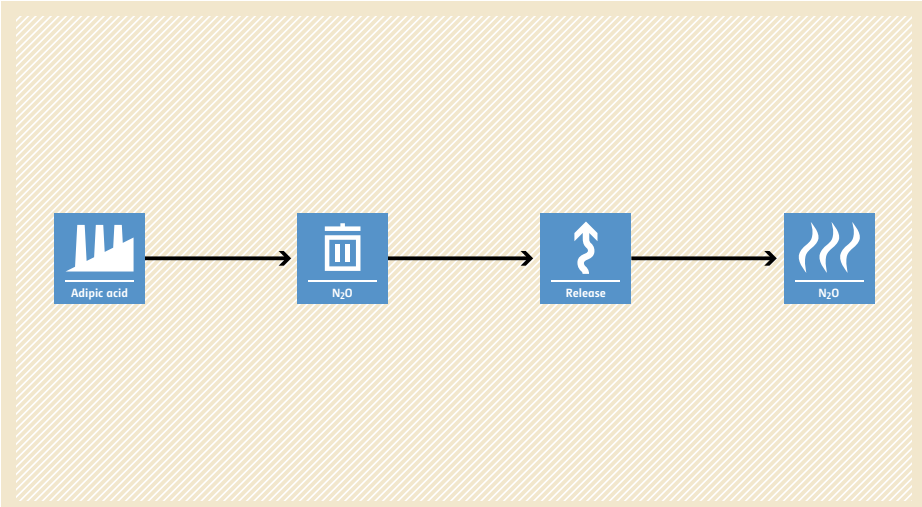
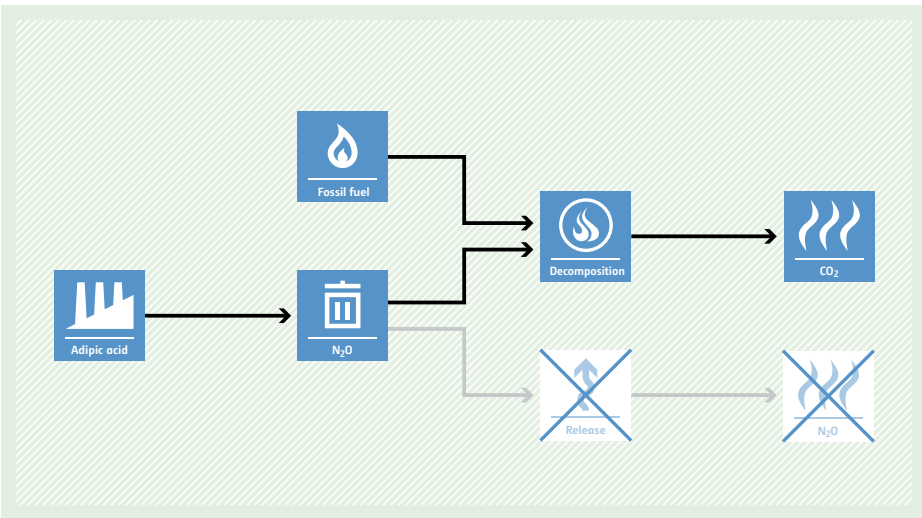
AM0019 Renewable energy projects replacing part of the electricity production of one single fossil fuel fired power plant that stands alone or supplies to a grid, excluding biomass projects

<p>Typical project(s)</p>	<p>Generation of electricity from the zero-emission renewable energy sources such as wind, geothermal, solar, hydro, wave and/or tidal projects that displaces electricity produced from a specific fossil fuel plant.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy. <p>Displacement of more-GHG-intensive generation of electricity by the use of renewable energy sources.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Biomass projects are not eligible; • The identified baseline plant is able to meet any possible increase of energy demand that occurs during the crediting period; • Three years of historical data is required for the calculation of emissions reductions; • Hydro power plants with reservoir require power densities greater than 4W/m².
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Carbon emission factor of the baseline power plant. <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of electricity supplied to the grid by the project; • If the project involves geothermal energy: fugitive CO₂ and CH₄ emissions due to release of non-condensable gases from the produced steam.
<p>BASELINE SCENARIO A specific fossil fuel plant generates electricity that is supplied to the grid.</p>	 <p>The diagram illustrates the baseline scenario. It starts with a 'Fossil fuel' icon (a flame) on the left. An arrow points to a 'Power plant' icon (a lightning bolt with a flame). From the 'Power plant' icon, two arrows branch out: one points to an 'Electricity' icon (a lightning bolt) and the other points to a 'CO₂' icon (a flame with wavy lines).</p>
<p>PROJECT SCENARIO A renewable energy plant partially or completely displaces the electricity that is generated by the specific fossil fuel power plant.</p>	 <p>The diagram illustrates the project scenario. It starts with a 'Fossil fuel' icon (a flame) with a blue 'X' over it. An arrow points to a 'Power plant' icon (a lightning bolt with a flame) also with a blue 'X' over it. From the 'Power plant' icon, three arrows branch out: one points to a 'Renewable' icon (a lightning bolt), one points to an 'Electricity' icon (a lightning bolt), and the other points to a 'CO₂' icon (a flame with wavy lines) with a blue 'X' over it.</p>

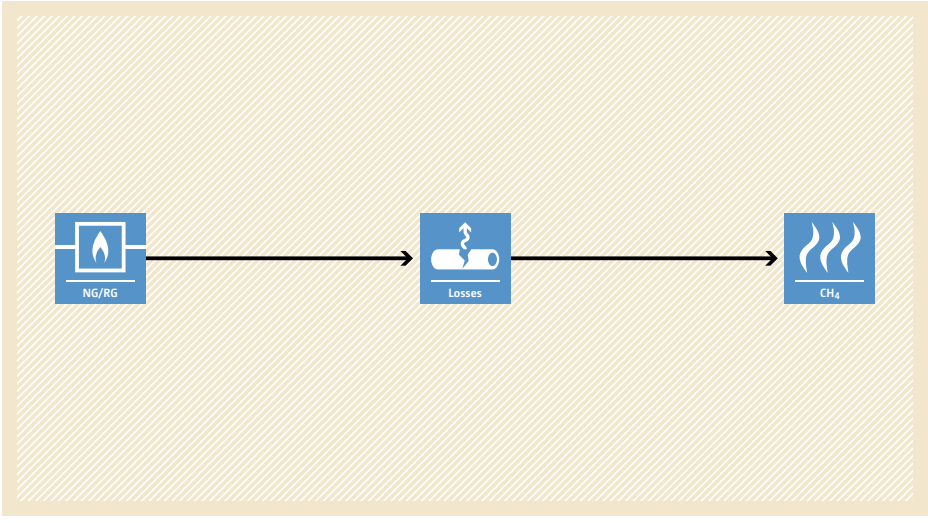
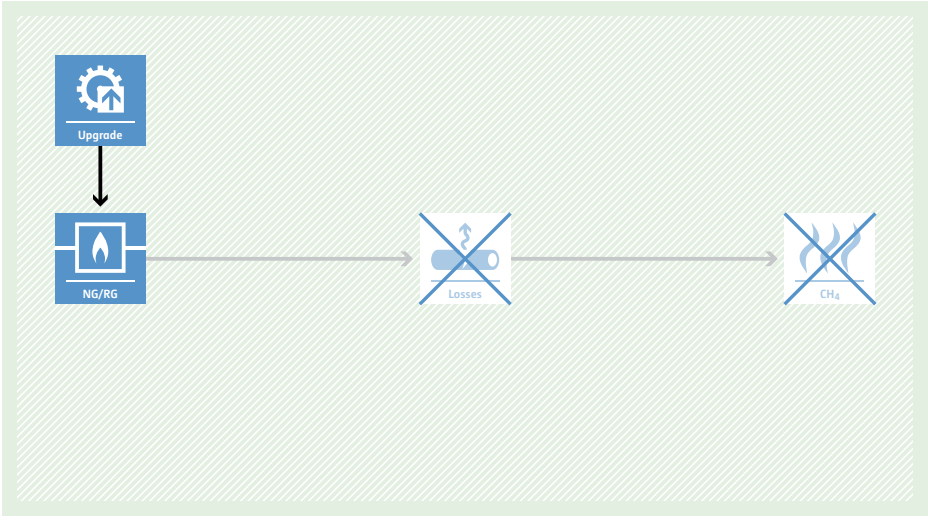
AM0020 Baseline methodology for water pumping efficiency improvements

<p>Typical project(s)</p>	<p>Energy efficiency improvement in municipal water utilities (e.g. increasing the energy efficiency of a water pumping system, reducing technical losses and leaks) thereby reducing the amount of energy required to deliver a unit of water to end-users.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Switch to more energy-efficient technology/measure.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project pumping system is powered by grid electricity; • No performance related contract or policies are already in place that would trigger improvements anyway; • New system/s developed to completely replace the old pumping system/s that will no longer be used, however the methodology applies to new system/s only up to the measured delivery capacity of the old system/s; • This methodology is not applicable to projects where entirely new system/s is/are implemented to augment the existing capacity.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Water supplied and power consumption in the baseline situation. <p>Monitored:</p> <ul style="list-style-type: none"> • Grid emission factor; • Water volume supplied by the project; • Electrical energy required to deliver water within the boundaries of the system.
<p>BASELINE SCENARIO Delivery of water from an inefficient pumping system.</p>	 <p>The diagram illustrates the baseline scenario. It starts with a 'Fossil fuel' icon (flame) pointing to a 'Grid' icon (power lines). From the 'Grid', an arrow points to an 'Electricity' icon (lightning bolt), which then points to a 'Pumping' icon (gear). A separate arrow from the 'Grid' points directly to a 'CO2' icon (flame with wavy lines), representing emissions from the grid.</p>
<p>PROJECT SCENARIO Delivery of water from a pumping system that has a lower energy demand due to reducing losses or leaks in the pumping system and/or by implementing measures to increase energy efficiency.</p>	 <p>The diagram illustrates the project scenario. It follows the same path as the baseline: 'Fossil fuel' to 'Grid' to 'Electricity' to 'Pumping'. However, an 'Upgrade' icon (gear with an upward arrow) points to the 'Pumping' icon, indicating an improvement in efficiency. The final 'CO2' icon shows a smaller flame, representing reduced emissions compared to the baseline.</p>

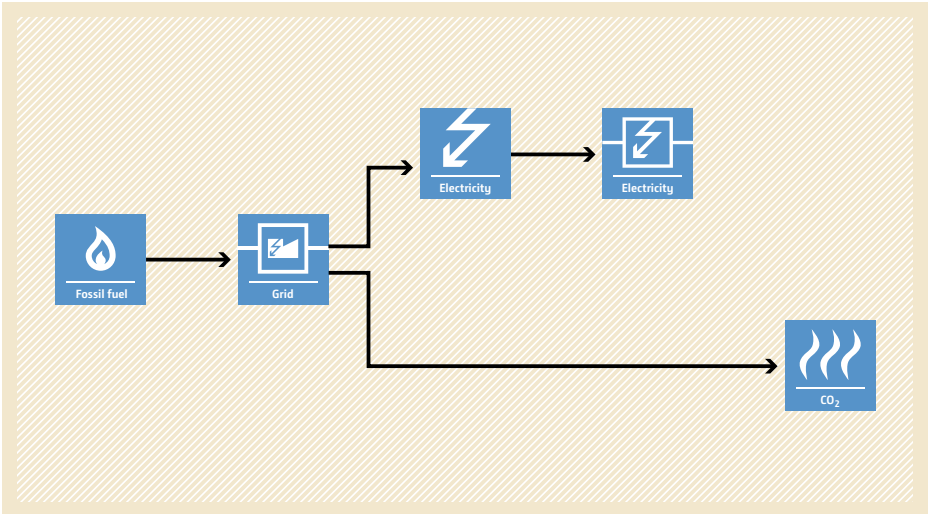
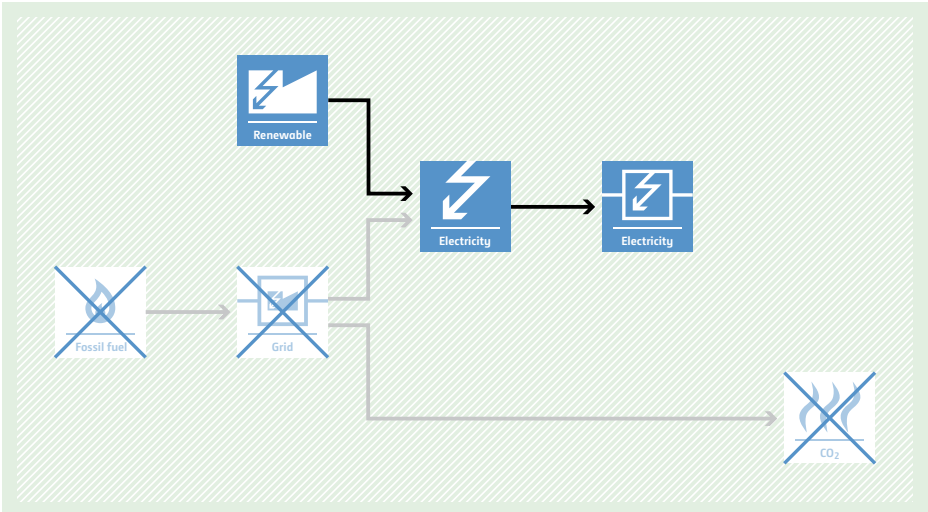
AM0021 Baseline methodology for decomposition of N₂O from existing adipic acid production plants

<p>Typical project(s)</p>	<p>Installation of a catalytic or thermal N₂O destruction facility at an existing adipic acid production plant.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG destruction. <p>Catalytic or thermal destruction of N₂O emissions.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The adipic acid plant started the commercial production no later than 31 December 2004; • European Norm 14181 must be followed for real-time measurement of N₂O concentration and gas volume flow rate.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Maximum amount of adipic acid production in the most recent three years. <hr/> <p>Monitored:</p> <ul style="list-style-type: none"> • Production of adipic acid; • Consumption of nitric acid; • N₂O concentration at the inlet and outlet of the destruction facility; • Volume of gas flow at the inlet and outlet of the destruction facility.
<p>BASILINE SCENARIO N₂O is emitted into the atmosphere during the production of adipic acid.</p>	 <p>The diagram illustrates the baseline scenario. It starts with an icon of a factory labeled 'Adipic acid'. An arrow points to an icon of a trash bin labeled 'N₂O'. Another arrow points to an icon of a release symbol (a circle with an upward arrow) labeled 'Release'. A final arrow points to an icon of flames labeled 'N₂O', representing atmospheric emissions.</p>
<p>PROJECT SCENARIO N₂O is destroyed in a catalytic or thermal destruction unit.</p>	 <p>The diagram illustrates the project scenario. It starts with an icon of a factory labeled 'Adipic acid'. An arrow points to an icon of a trash bin labeled 'N₂O'. From this point, two paths emerge: one goes to a 'Decomposition' unit (represented by a flame icon) which then leads to a 'CO₂' emissions icon; the other path goes to a 'Release' unit (represented by a release symbol icon) which leads to an 'N₂O' emissions icon. The 'Release' and 'N₂O' icons are crossed out with a large 'X', indicating that no N₂O is released. Additionally, an icon of a flame labeled 'Fossil fuel' has an arrow pointing to the 'Decomposition' unit.</p>

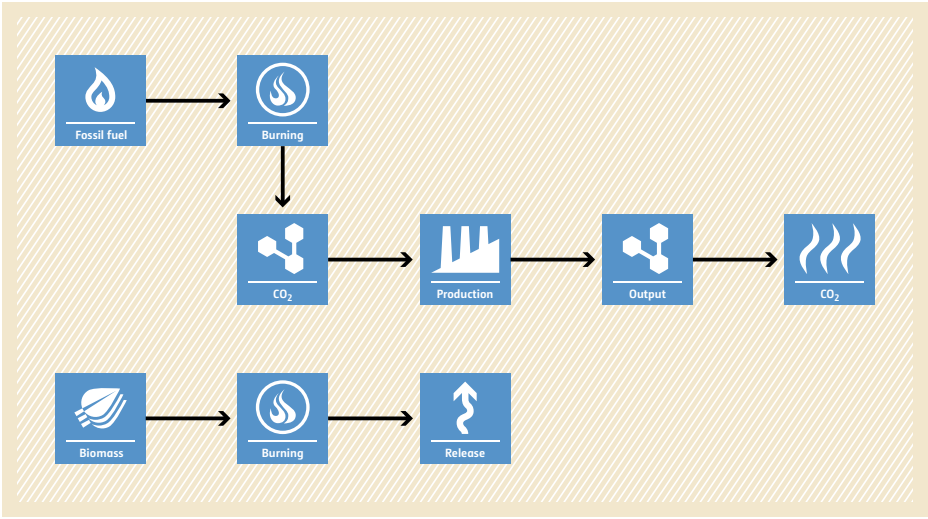
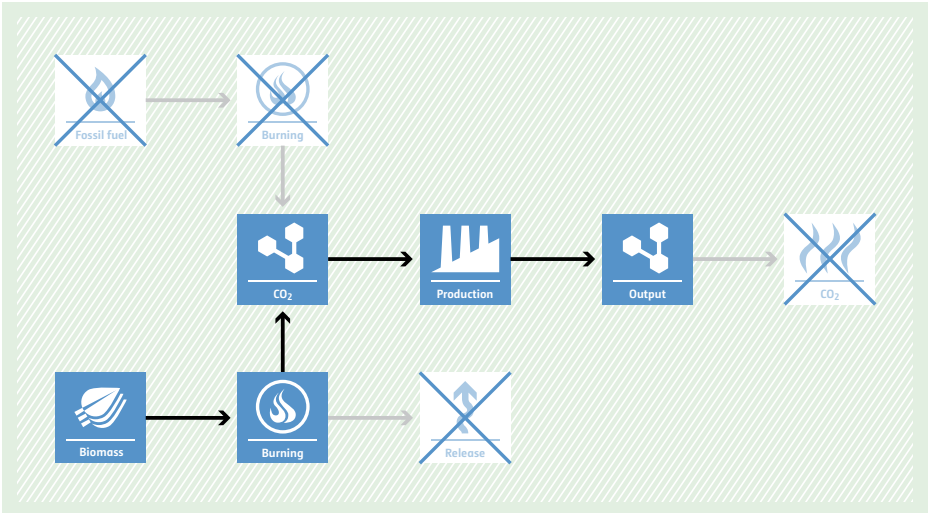
AM0023 Leak detection and repair in gas production, processing, transmission, storage and distribution systems and in refinery facilities

<p>Typical project(s)</p>	<p>Identification and repair of natural gas (NG) and refinery gas (RG) leaks in above-ground process equipment in natural gas production, processing, transmission, storage, distribution systems and in refinery facilities.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG formation avoidance. • Avoidance of CH₄ emissions.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • No systems are in place to systematically identify and repair leaks in the transmission and distribution system; • Leaks can be identified and accurately measured; • A monitoring system ensures the permanence of the repairs.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Leak flow; • Methane concentration in the flow.
<p>BASELINE SCENARIO CH₄ leaks from a natural gas transmission distribution system.</p>	 <p>The diagram illustrates the baseline scenario. It features a horizontal flow from left to right. On the left, there is a blue square icon with a flame and the text 'NG/RG'. An arrow points from this icon to a central blue square icon showing a pipe with a leak and the text 'Losses'. A second arrow points from the 'Losses' icon to a final blue square icon with three wavy lines and the text 'CH₄'.</p>
<p>PROJECT SCENARIO CH₄ leaks from the natural gas transmission systems have been repaired.</p>	 <p>The diagram illustrates the project scenario. It features a vertical flow starting with a blue square icon of a gear and an upward arrow with the text 'Upgrade'. An arrow points down from this icon to a blue square icon with a flame and the text 'NG/RG'. From the 'NG/RG' icon, an arrow points to a central blue square icon showing a pipe with a leak and the text 'Losses', which is crossed out with a large blue 'X'. A second arrow points from the 'Losses' icon to a final blue square icon with three wavy lines and the text 'CH₄', which is also crossed out with a large blue 'X'.</p>

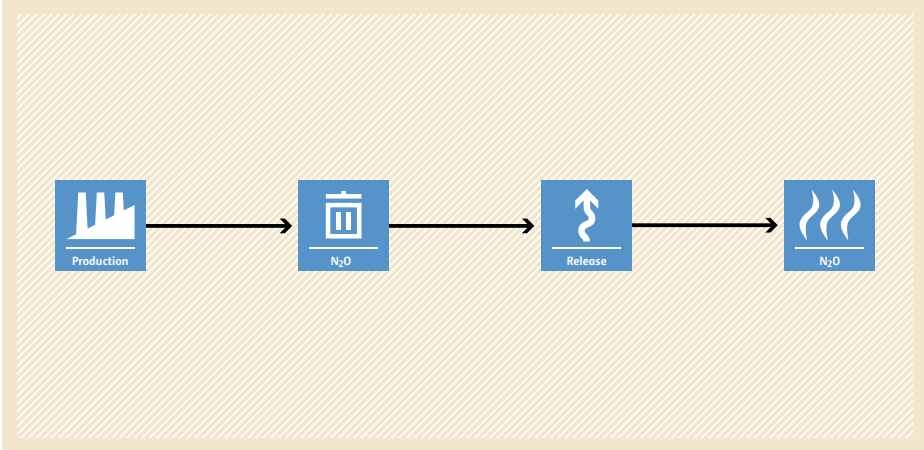
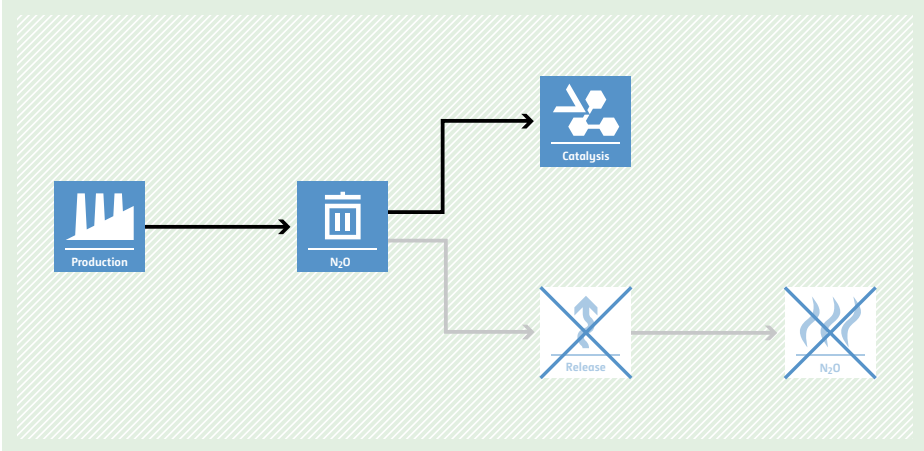
AM0026 Methodology for zero-emissions grid-connected electricity generation from renewable sources in Chile or in countries with merit order based dispatch grid

<p>Typical project(s)</p>	<p>Electricity capacity additions (either through the installation of new, or the modification of existing, power plants) that supply electricity to the grid and use renewable energy sources such as hydro, wind, solar, geothermal, wave or tidal power. The capacity additions have to be connected to the Chilean interconnected grid or others countries' grids providing a similar merit order based framework.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy. <p>Displacement of electricity that would be provided to the grid by more-GHG-intensive means.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project power plant must either be connected to the grid of Chile and fulfil the legal obligations under the Chilean Electricity Regulation, or be implemented in other countries if the country has a regulatory framework for electricity generation and dispatch that meets the conditions described in the methodology; • New hydroelectric power projects with reservoirs require power densities greater than 4 W/m².
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Electricity supplied to the grid by the project; • Hourly data for merit order based on marginal costs; • Operational data of the power plants connected to the same grid as the project.
<p>BASELINE SCENARIO Power is provided to the grid using more-GHG-intensive power sources.</p>	 <p>The diagram illustrates the baseline scenario. On the left, a 'Fossil fuel' icon (flame) is connected by an arrow to a 'Grid' icon (power lines). From the 'Grid', two arrows branch out: one goes to an 'Electricity' icon (lightning bolt) and another goes to a 'CO₂' icon (flames). The 'Electricity' icon is further connected to another 'Electricity' icon, representing end-users. The entire diagram is set against a light orange background with a diagonal hatching pattern.</p>
<p>PROJECT SCENARIO Installation of a new, or modification of an existing, renewable power plant that results in an increase of renewable power and displacement of electricity that would be provided to the grid by more-GHG-intensive means.</p>	 <p>The diagram illustrates the project scenario. On the left, a 'Renewable' icon (lightning bolt) is connected by an arrow to a 'Grid' icon (power lines). From the 'Grid', two arrows branch out: one goes to an 'Electricity' icon (lightning bolt) and another goes to a 'CO₂' icon (flames). The 'Electricity' icon is further connected to another 'Electricity' icon, representing end-users. The 'Fossil fuel' and 'CO₂' icons from the baseline scenario are shown with a large 'X' over them, indicating they are displaced. The entire diagram is set against a light green background with a diagonal hatching pattern.</p>

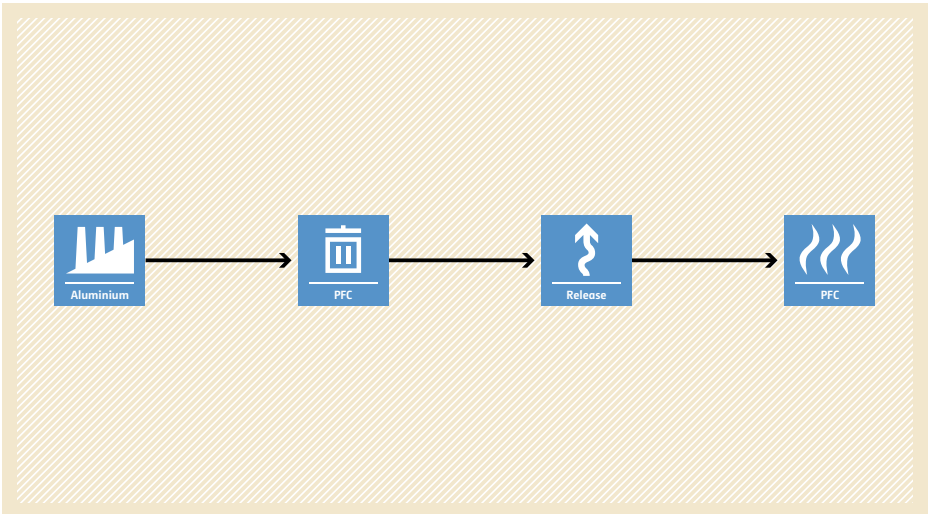
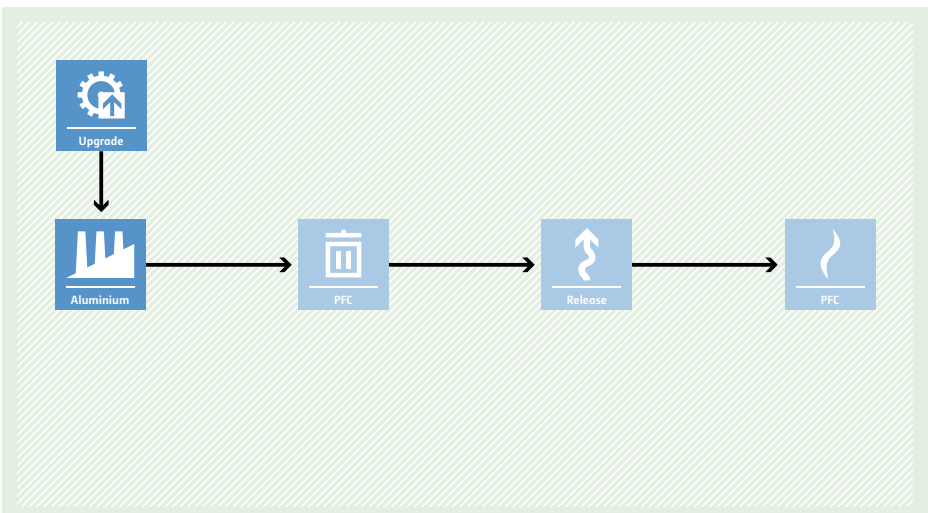
AM0027 Substitution of CO₂ from fossil or mineral origin by CO₂ from renewable sources in the production of inorganic compounds

<p>Typical project(s)</p>	<p>Industrial processes where biogenic residual CO₂ is used as input in the production of inorganic compounds substituting CO₂ from fossil or mineral sources.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Feedstock switch. <p>Use of a biogenic residual source of CO₂ displacing fossil/mineral sources for the production of inorganic compounds.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Prior to the implementation of the project activity, the biogenic residual CO₂ was produced, but not used for any purpose; • The CO₂ used prior to the implementation of the project activity was sourced from a process which does not involve energy production and will not continue under the project scenario; • The production process of inorganic compounds does not undergo changes in product, energy requirement or capacity as a result of the implementation of the project activity.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Amount of inorganic compound produced; • Carbon content and molecular weight of the inorganic compound; • Amount of CO₂ used per tonne of inorganic compound.
<p>BASELINE SCENARIO CO₂ is obtained from fossil or mineral sources to be used as input for the production of inorganic compounds.</p>	 <p>The diagram illustrates the baseline scenario. It shows two parallel processes. The top process starts with 'Fossil fuel' (represented by a flame icon), which goes to 'Burning' (flame icon). From 'Burning', an arrow points to 'CO₂' (molecular structure icon). This 'CO₂' then goes to 'Production' (factory icon), then to 'Output' (molecular structure icon), and finally to another 'CO₂' (flame icon). The bottom process starts with 'Biomass' (leaf icon), which goes to 'Burning' (flame icon), and then to 'Release' (upward arrow icon).</p>
<p>PROJECT SCENARIO Biogenic residual sources of CO₂ are used for the production of inorganic compounds.</p>	 <p>The diagram illustrates the project scenario. It shows two parallel processes. The top process is crossed out with a large 'X'. It starts with 'Fossil fuel' (flame icon), goes to 'Burning' (flame icon), then to 'CO₂' (molecular structure icon), then to 'Production' (factory icon), then to 'Output' (molecular structure icon), and finally to another 'CO₂' (flame icon). The bottom process is active. It starts with 'Biomass' (leaf icon), which goes to 'Burning' (flame icon). From 'Burning', an arrow points to 'CO₂' (molecular structure icon). This 'CO₂' then goes to 'Production' (factory icon), then to 'Output' (molecular structure icon). From 'Output', an arrow points to another 'CO₂' (flame icon), which is crossed out with a large 'X'. Additionally, an arrow from 'Burning' points to 'Release' (upward arrow icon), which is also crossed out with a large 'X'.</p>

AM0028 N₂O destruction in the tail gas of caprolactam production plants

Typical project(s)	Installation of a catalytic reduction unit to destroy N ₂ O emissions in the tail gas of caprolactam production plants.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • GHG destruction. Catalytic destruction of N ₂ O emissions.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • The caprolactam plant started the commercial production no later than 31 December 2005; • Caprolactam plants are limited to those employing the Raschig or HPO® processes; • European Norm 14181 or an equivalent standard must be followed for real-time measurement of N₂O concentration and gas volume flow rate; • The methodology allows thermal and catalytic destruction of N₂O.
Important parameters	At validation: <ul style="list-style-type: none"> • Normal operating conditions of the plant (oxidation temperature and pressure, ammonia gas flow rate to AOR, and composition of ammonia oxidation catalyst). <hr/> Monitored: <ul style="list-style-type: none"> • Production of caprolactam; • Volume of gas flow at the inlet and outlet of the destruction facility; • N₂O concentration at the inlet and outlet of the destruction facility; • Update of the parameters for determining the normal operating conditions of the plant.
BASELINE SCENARIO N ₂ O is emitted into the atmosphere during the production of caprolactam.	 <p>The baseline scenario flowchart shows a linear process: a 'Production' icon (factory) leads to an 'N₂O' icon (gas cylinder), which leads to a 'Release' icon (upward arrow), which finally leads to an 'N₂O' icon (flames).</p>
PROJECT SCENARIO N ₂ O is destroyed in a catalytic destruction unit installed at the tail gas stream.	 <p>The project scenario flowchart shows a linear process: a 'Production' icon (factory) leads to an 'N₂O' icon (gas cylinder). From this 'N₂O' icon, the path splits: one arrow goes up to a 'Catalysis' icon (catalytic converter), and another arrow goes down to a 'Release' icon (upward arrow). From the 'Release' icon, an arrow goes to an 'N₂O' icon (flames). In the project scenario, the 'Release' and 'N₂O' icons are crossed out with a large 'X', indicating that the release and subsequent N₂O emissions are prevented.</p>

AM0030 PFC emission reductions from anode effect mitigation at primary aluminium smelting facilities

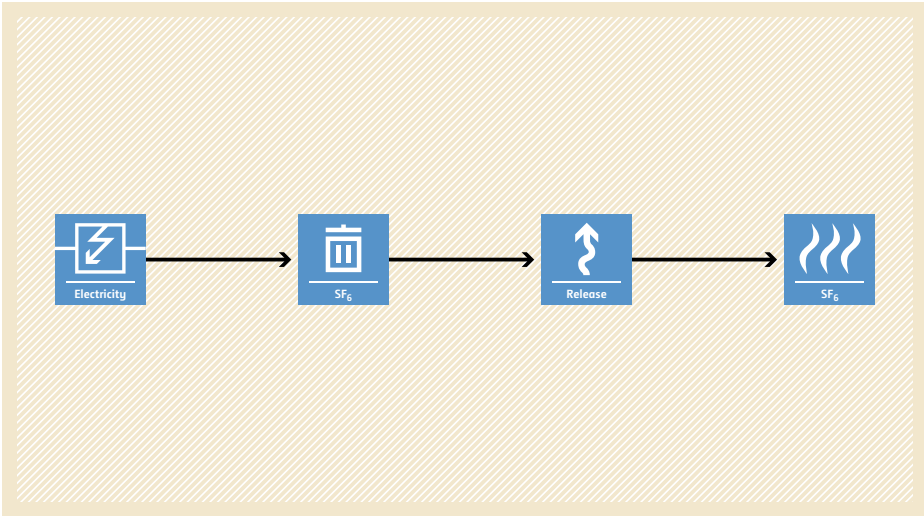
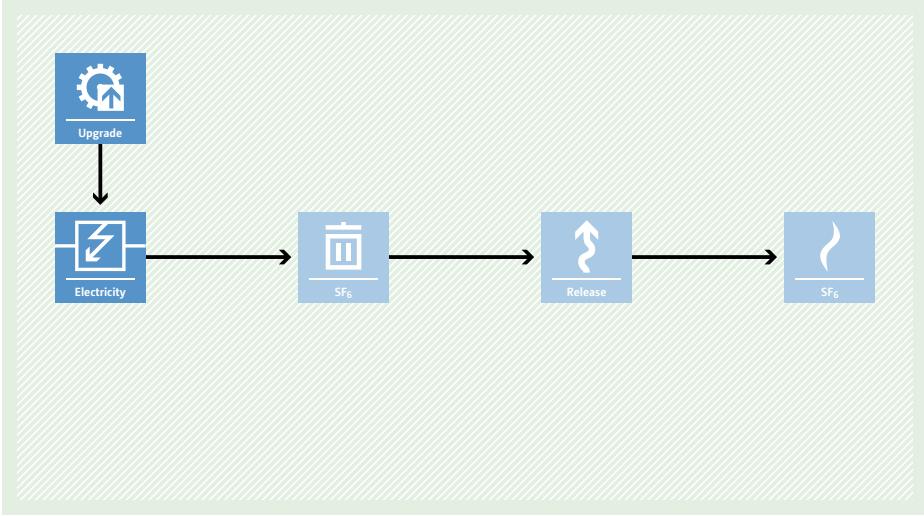
<p>Typical project(s)</p>	<p>Implementation of anode effect mitigation measures at a primary aluminium smelter (e.g. improving the algorithm of the automatic control system for smelting pots).</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG emission avoidance. <p>Avoidance of PFC emissions by anode effect mitigation.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The aluminium smelting facility started the commercial operation before 1 January 2009; • Minimum of three years of historical data is available on current efficiency, anode effect and aluminium production; • The aluminium smelting facility uses centre work pre-bake cell technology with bar brake (CWPB) or point feeder systems (PFPB); • The aluminium smelting facility has achieved an “operational stability associated to a PFC emissions level” that allows increasing the aluminium production by simply increasing the electric current in the pots.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of aluminium produced by the aluminium smelting facility; • Anode effect minutes per cell-day.
<p>BASELINE SCENARIO No mitigation of PFC emissions from anode effects at primary aluminium smelting facilities.</p>	 <p>The diagram illustrates the baseline scenario with a yellow background. It shows a linear flow: an 'Aluminium' icon (factory) leads to a 'PFC' icon (cylinder), which leads to a 'Release' icon (upward arrow), which finally leads to a 'PFC' icon (flame).</p>
<p>PROJECT SCENARIO Implementation of anode effect mitigation measures to reduce PFC emissions from aluminium smelting.</p>	 <p>The diagram illustrates the project scenario with a green background. It shows an 'Upgrade' icon (gear and arrow) with a downward arrow pointing to the 'Aluminium' icon in the baseline flow. The rest of the flow (Aluminium to PFC to Release to PFC) remains the same as in the baseline scenario.</p>

AM0031 Bus rapid transit projects



<p>Typical project(s)</p>	<p>Construction and operation of a new bus rapid transit system (BRT) for urban transport of passengers. Replacement, extensions or expansions of existing bus rapid transit systems (adding new routes and lines) are also allowed.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. • Displacement of more-GHG-intensive transportation modes by less-GHG-intensive ones.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The methodology is applicable for urban or suburban trips on BRT system with feeder and trunk routes where passengers can realize their entire trip on the project system; • If the analysis of possible baseline scenario alternatives leads to the result that a continuation of the use of the current modes of transport is the baseline scenario; • If biofuels are used, project buses must use the same biofuel blend (same percentage of biofuel) as commonly used by conventional comparable urban buses in the country.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Baseline distance and transport mode, which are obtained through a comprehensive survey involving the users of the project transport system; • Occupancy rates and travelled distances of different transport modes (including the project); • Policies affecting the baseline (i.e. modal split of passengers, fuel usage of vehicles, maximum vehicle age); • If expected emissions per passenger kilometer for BRT system is less than or equal to 50 gCO₂/pkm, the project is considered automatically additional.
	<p>Monitored:</p> <ul style="list-style-type: none"> • Number of passengers transported in the project; • Total consumption of fuel/electricity in the project.
<p>BASELINE SCENARIO Passengers are transported using a diverse transport system involving buses, trains, cars, non-motorized transport modes, etc. operating under mixed traffic conditions.</p>	<p>The diagram illustrates the baseline scenario with four transport modes: Train, Bus, Car, and Motorcycle. Each mode is represented by an icon in a blue box. Arrows from each icon point towards a central CO₂ emissions box on the right, indicating that all these modes contribute to the total emissions.</p>
<p>PROJECT SCENARIO Passengers are transported using the newly developed bus rapid transit system that partially displaces the existing transport system operating under mixed traffic conditions.</p>	<p>The diagram illustrates the project scenario with the same four transport modes: Train, Bus, Car, and Motorcycle. The arrows from the Train, Car, and Motorcycle modes are smaller than in the baseline scenario, while the arrow from the Bus mode is significantly larger, indicating that the BRT system has partially displaced other transport modes, leading to a reduction in total CO₂ emissions.</p>

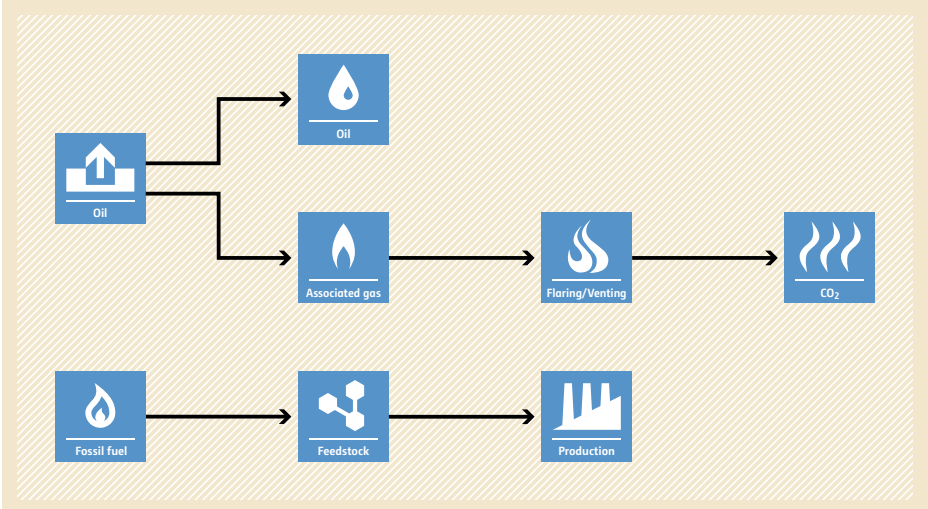
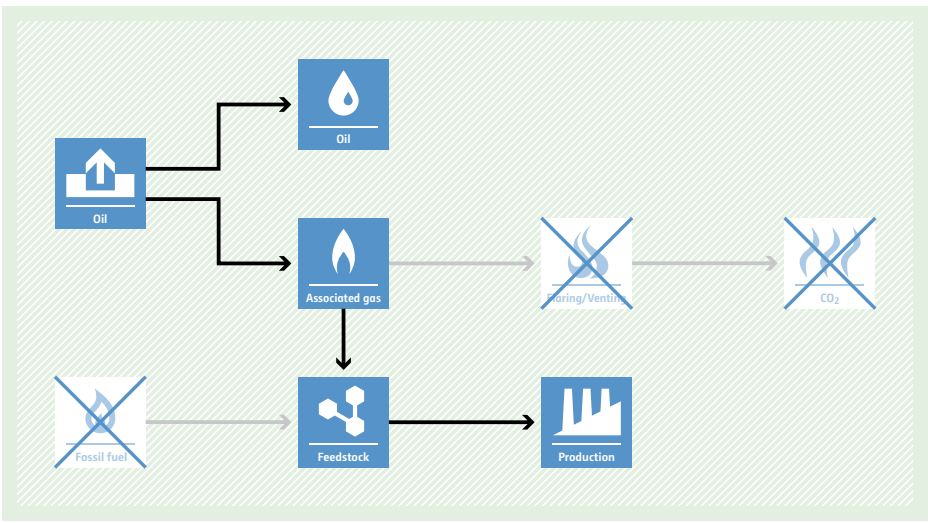
AM0035 SF₆ emission reductions in electrical grids

Typical project(s)	Recycling and/or leak reduction of SF ₆ in a electricity grid.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • GHG emission avoidance. Avoidance of SF ₆ emissions by recycling and/or leak reduction.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • The project is implemented either in the entire grid or a verifiable distinct geographic portion of a grid; • Minimum of three years of historical data is available on the total SF₆ emissions from the grid.
Important parameters	At validation: <ul style="list-style-type: none"> • Net reduction in an SF₆ inventory for the grid; • Nameplate capacity (in kg SF₆) of equipment retired from and added to the grid.
	Monitored: <ul style="list-style-type: none"> • Update of the above parameters necessary for validation.
BASELINE SCENARIO SF ₆ emitted from leaks and/or non-recycling of SF ₆ during repair and maintenance of electricity transmission and distribution systems.	 <p>The baseline scenario flowchart shows a linear process: Electricity (represented by a lightning bolt icon) leads to SF₆ (represented by a trash can icon), which then leads to Release (represented by an upward arrow icon), resulting in SF₆ emissions (represented by wavy lines icon).</p>
PROJECT SCENARIO Recycling and/or leak-reduction of SF ₆ during repair and maintenance of electricity transmission and distribution systems.	 <p>The project scenario flowchart shows an 'Upgrade' step (represented by a gear and upward arrow icon) leading to the 'Electricity' step (lightning bolt icon). The rest of the process is identical to the baseline: Electricity leads to SF₆ (trash can icon), which leads to Release (upward arrow icon), resulting in SF₆ emissions (wavy lines icon).</p>

AM0036 Use of biomass in heat generation equipment

<p>Typical project(s)</p>	<p>Fuel switch from fossil fuels to biomass in the generation of heat. Applicable activities are retrofit or replacement of existing heat generation equipment and installation of new heat generation equipment.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy. <p>Displacement of more-GHG-intensive heat generation using fossil fuel and avoidance of CH₄ emissions from anaerobic decay of biomass residues.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Heat generated in the project can only be used for power generation if power generation equipment was previously installed and is maintained throughout the crediting period; • Biomass types used by the project activity are limited to biomass residues, biogas, Refuse Derived Fuel (RDF) and/or biomass from dedicated plantations; • In case of existing facilities, three years of historical data is required for the calculation of emissions reductions.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Historical annual heat generation and biomass consumption at the project site. <p>Monitored:</p> <ul style="list-style-type: none"> • Heat generated by the project activity; • Quantities of biomass used in the project plant; • Electricity and fossil fuel consumption by the project activity; • Parameters related to project and leakage emissions from biomass.
<p>BASELINE SCENARIO Heat would be produced by the use of fossil fuels. Biomass residues could partially decay under anaerobic conditions, generating CH₄ emissions.</p>	<p>The diagram shows a flowchart for the baseline scenario. On the left, 'Fossil fuel' (flame icon) and 'Biomass' (leaf icon) are inputs. 'Fossil fuel' leads to 'Heat' (thermometer icon). 'Biomass' leads to 'Disposal' (trash can icon) and 'Burning' (flame icon). 'Disposal' leads to 'CH₄' (flame icon). 'Burning' leads to 'Heat' and 'CH₄'. The 'Heat' from fossil fuel and the 'Heat' from burning both lead to 'CO₂' (flame icon). The 'CH₄' from disposal and the 'CH₄' from burning both lead to 'CH₄'.</p>
<p>PROJECT SCENARIO Use of biomass for heat generation avoids fossil fuel use and its associated GHG emissions.</p>	<p>The diagram shows a flowchart for the project scenario. On the left, 'Fossil fuel' (flame icon) and 'Biomass' (leaf icon) are inputs. 'Fossil fuel' and 'Biomass' both lead to 'Renewable' (thermometer icon). 'Renewable' leads to 'Heat' (thermometer icon). 'Biomass' also leads to 'Disposal' (trash can icon) and 'Burning' (flame icon). 'Disposal' and 'Burning' both lead to 'CH₄' (flame icon). The 'Heat' from renewable and the 'Heat' from burning both lead to 'CO₂' (flame icon). The 'CH₄' from disposal and the 'CH₄' from burning both lead to 'CH₄'. The 'Fossil fuel' input and its associated 'Heat' and 'CO₂' outputs are crossed out with a large 'X'.</p>

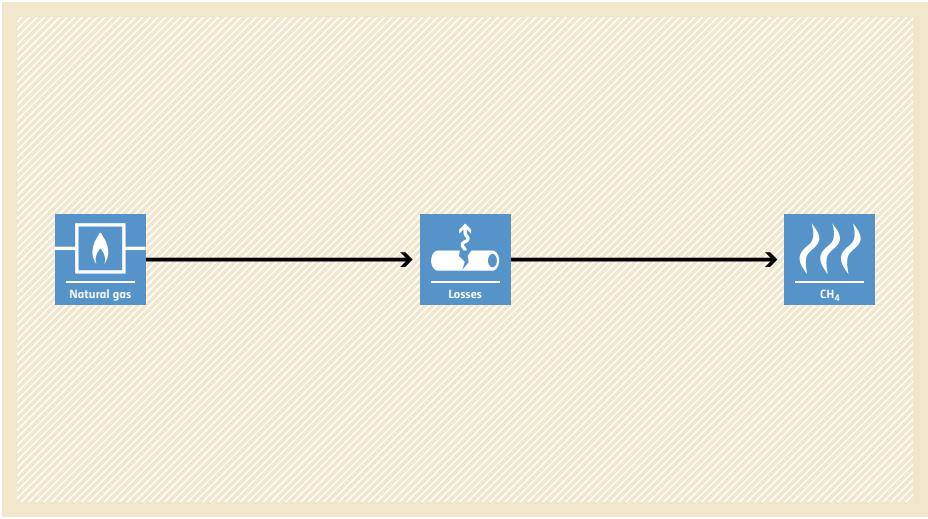
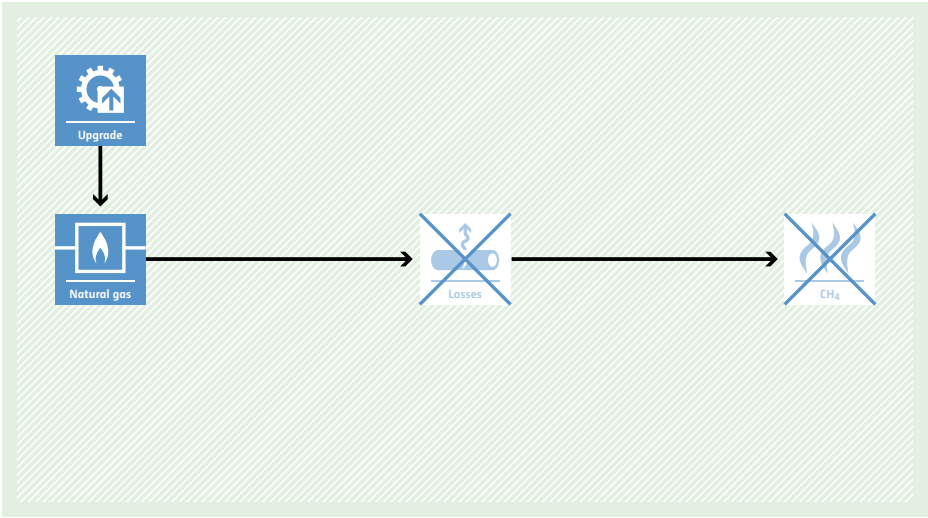
AM0037 Flare (or vent) reduction and utilization of gas from oil wells as a feedstock

<p>Typical project(s)</p>	<p>Associated gas from oil wells that was previously flared or vented is recovered and utilized as a feedstock to produce a chemical product.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Feedstock switch. <p>Avoidance of GHG emissions that would have occurred by flaring/venting the associated gas.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The associated gas from the oil well, which is used in the project, was flared or vented for the last three years prior to the start of the project; • Under the project, the previously flared (or vented) associated gas is used as feedstock and, where applicable, partly as energy source in a chemical process to produce a useful product (e.g. methanol, ethylene or ammonia).
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Mass fraction of methane in the associated gas; • Quantity of product(s) produced in the end-use facility in the project; • Quantity and carbon content of associated gas utilized in the project, i.e. the quantity of associated gas entering the pipeline for transport to the end-use facility.
<p>BASELINE SCENARIO Associated gas from oil wells is flared or vented and other feedstock is used to produce a chemical product.</p>	
<p>PROJECT SCENARIO Associated gas from oil wells is recovered and utilized as feedstock to produce a chemical product.</p>	

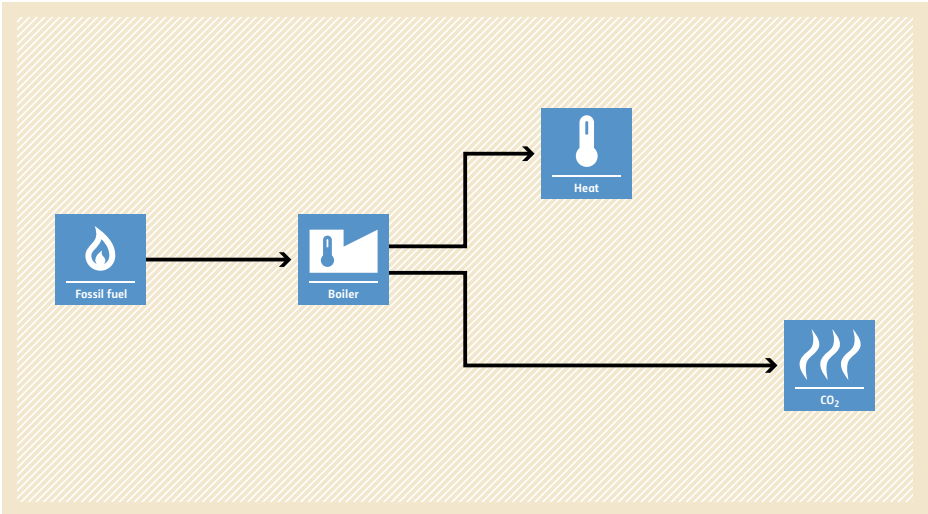
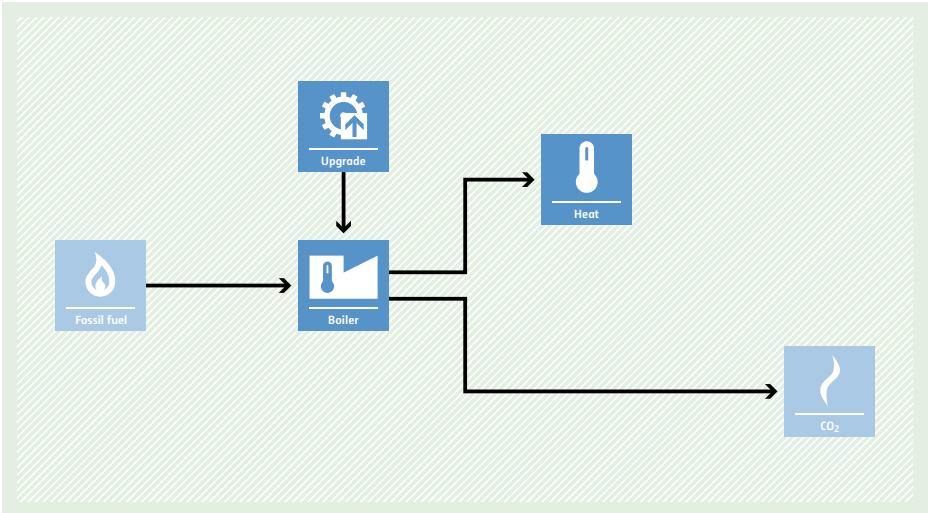
AM0038 Methodology for improved electrical energy efficiency of an existing submerged electric arc furnace used for the production of silicon and ferry alloys

Typical project(s)	Retrofitting of existing furnaces for the production of silicon and ferry alloys including control and peripheral systems with a more efficient system.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • Energy efficiency. • Switch to more energy-efficient technology.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • The electricity consumed is supplied by the grid; • The quality of the raw material and products remains unchanged; • Data for at least three years preceding the implementing the project is available to estimate the baseline emission.
Important parameters	<p>At validation:</p> <ul style="list-style-type: none"> • Grid emission factor (can also be monitored ex post). <hr/> <p>Monitored:</p> <ul style="list-style-type: none"> • Alloys production and consumption of electricity, reductants and electrode paste; • Project-specific quality and emission factors for reductants and electrode paste.
BASELINE SCENARIO Consumption of grid electricity in the submerged arc furnaces results in CO ₂ emissions from the combustion of fossil fuel used to produce electricity.	
PROJECT SCENARIO The more-efficient submerged arc furnaces consume less electricity, and thereby, emissions from the combustion of fossil fuel used to produce electricity are reduced.	

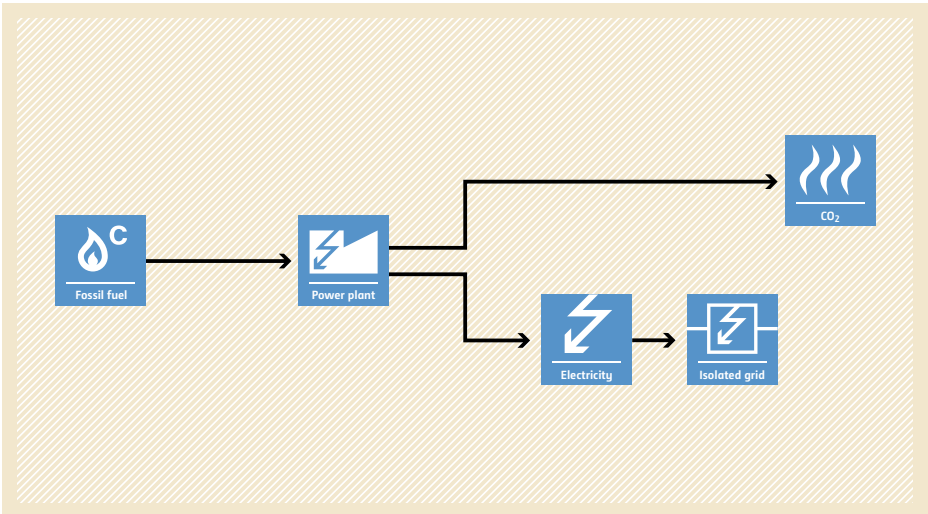
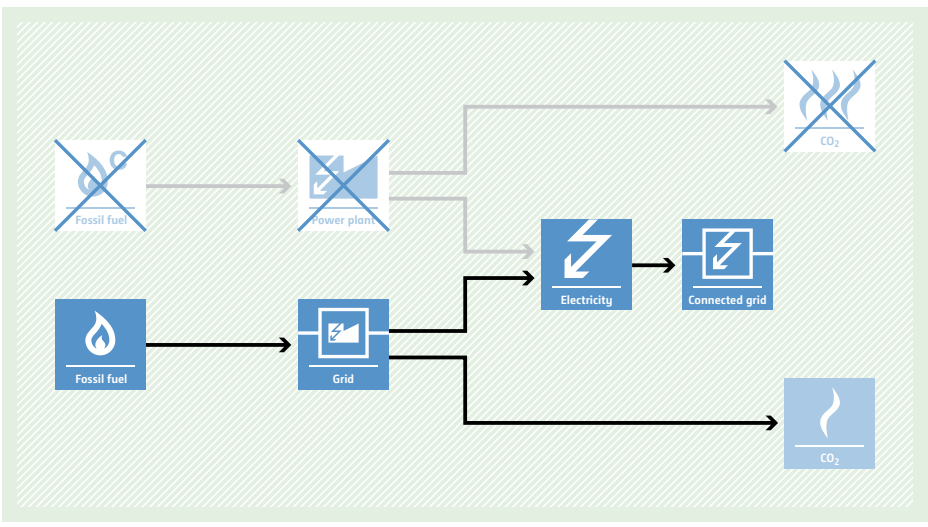
AM0043 Leak reduction from a natural gas distribution grid by replacing old cast iron pipes or steel pipes without cathodic protection with polyethylene pipes

Typical project(s)	Installation of polyethylene pipes for the early replacement of leaking cast iron pipes or steel pipes without cathodic protection in a natural gas distribution network.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • GHG emissions avoidance. • Avoidance of CH₄ emissions from leaks in natural gas transportation.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • The project replaces either cast iron pipes or steel pipes without cathodic protection that have been in use for 30 years with polyethylene pipes without altering the pattern and supply capacity of the system; • The replacement is not part of normal repair and maintenance, planned replacement, or due to interruptions or shortages or a switch from servicing other gases; • The distribution system does not include gas transmission pipelines or storage facilities.
Important parameters	At validation: <ul style="list-style-type: none"> • Length of pipes and number of leaks (alternative: leakage rate of the section). Monitored: <ul style="list-style-type: none"> • Length of new pipeline due to both project and procedural replacement; • Fraction of methane in the natural gas; • Pressure of natural gas in the network.
BASELINE SCENARIO Methane leaks from a natural gas network.	 <p>The diagram illustrates the baseline scenario on a light orange background. It shows a horizontal flow from left to right. On the left is a blue square icon with a flame and the text 'Natural gas'. An arrow points to a central blue square icon showing a pipe with a crack and the text 'Losses'. A second arrow points to a rightmost blue square icon with three wavy lines and the text 'CH₄'.</p>
PROJECT SCENARIO No leaks or fewer leaks in the natural gas network.	 <p>The diagram illustrates the project scenario on a light green background. At the top left is a blue square icon with a gear and a house and the text 'Upgrade'. An arrow points down to a blue square icon with a flame and the text 'Natural gas'. An arrow points from 'Natural gas' to a central blue square icon showing a pipe with a crack and the text 'Losses'. A second arrow points from 'Losses' to a rightmost blue square icon with three wavy lines and the text 'CH₄'. The 'Losses' and 'CH₄' icons are crossed out with a large blue 'X'.</p>

AM0044 Energy efficiency improvement projects - boiler rehabilitation or replacement in industrial and district heating sectors

<p>Typical project(s)</p>	<p>Projects that results in thermal energy efficiency improvement of fossil-fuel-fired boilers, at multiple locations, through rehabilitation or replacement of the boilers implemented by the project participant, who may be the owner of boilers or owner of all the sites or part of the sites where the boilers are to be installed or a third party that owns all the project boilers during the project period.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. • Switch to more energy-efficient technology.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The boilers that are rehabilitated or replaced under the project should have some remaining lifetime; • Only one type of fuel is used by each of the boilers included in the project boundary and no fuel switching is undertaken within the project boundary, as a part of project; • The installed capacity of each boiler shall be determined using a performance test in accordance with well-recognized international standards.
<p>Important parameters</p>	<p>Monitored</p> <ul style="list-style-type: none"> • Amount of fossil fuel consumed, net calorific value of fossil fuel, emission factor of fossil fuel, oxidation factor of fossil fuel in each boiler in the project; • Total thermal output of each boiler in the project.
<p>BASELINE SCENARIO Boiler(s) with lower efficiency will continue to operate at multiple locations, thereby consuming high amounts of fossil fuel.</p>	 <p>The diagram illustrates the baseline scenario. It shows a flow starting from a 'Fossil fuel' icon (a flame) on the left. An arrow points to a 'Boiler' icon (a boiler with a flame). From the 'Boiler' icon, two arrows branch out: one points up to a 'Heat' icon (a thermometer) and the other points right to a 'CO₂' icon (wavy lines representing emissions).</p>
<p>PROJECT SCENARIO The efficiency of boiler(s) is improved through their rehabilitation or replacement, resulting in a reduction of fossil fuel consumption and related CO₂ emissions.</p>	 <p>The diagram illustrates the project scenario. It shows a flow starting from a 'Fossil fuel' icon (a flame) on the left. An arrow points to a 'Boiler' icon (a boiler with a flame). Above the 'Boiler' icon is an 'Upgrade' icon (a gear with an upward arrow), with an arrow pointing down to the boiler. From the 'Boiler' icon, two arrows branch out: one points up to a 'Heat' icon (a thermometer) and the other points right to a 'CO₂' icon (wavy lines representing emissions).</p>

AM0045 Grid connection of isolated electricity systems

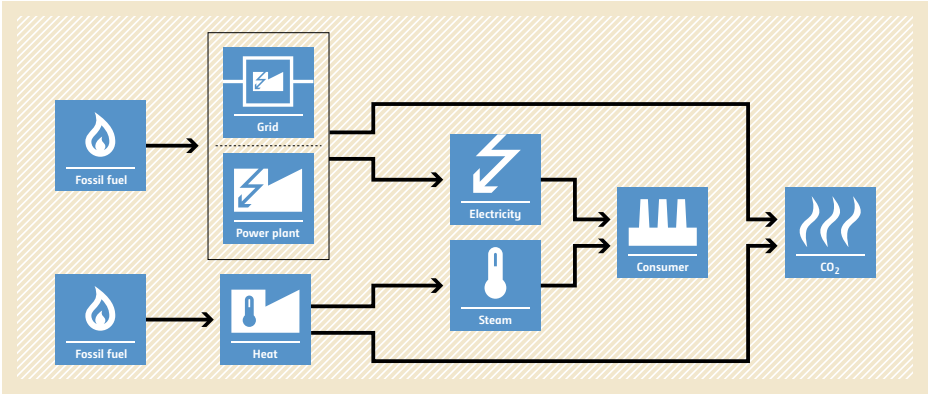
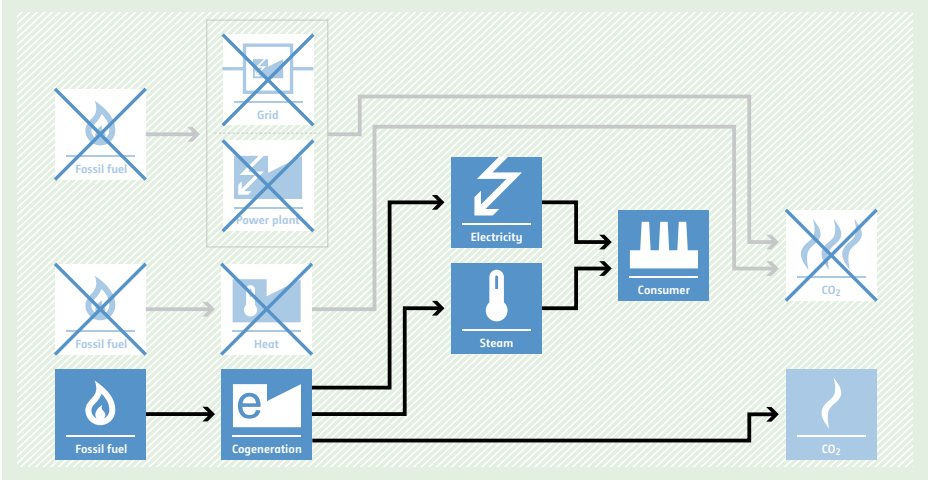
<p>Typical project(s)</p>	<p>Expansion of an interconnected grid to supply electricity generated by more-efficient, less-carbon-intensive means to an isolated electric power system.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Displacement of a more-GHG-intensive output. Displacement of electricity that would be provided by more-GHG-intensive means.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> Renewable energy-based electricity generation in the isolated systems is not displaced and its operation is not significantly affected; All fossil-fuel-fired power plants in the isolated system are 100% displaced.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Grid emission factor of isolated system before start of the project; Electricity supplied to isolated system before start of the project (three years of historic data required). <p>Monitored:</p> <ul style="list-style-type: none"> Quantity of electricity supplied to the previously isolated system by the interconnected grid; Grid emission factor of the interconnected grid.
<p>BASILINE SCENARIO Power generation based on fossil fuel applying less-efficient technologies in isolated electricity systems.</p>	 <p>The diagram illustrates the baseline scenario. On the left, a box labeled 'Fossil fuel' with a flame icon and a 'C' for carbon is connected by an arrow to a box labeled 'Power plant' with a lightning bolt icon. From the 'Power plant', two arrows branch out: one points to a box labeled 'CO₂' with a flame icon, and the other points to a box labeled 'Electricity' with a lightning bolt icon. From the 'Electricity' box, an arrow points to a box labeled 'Isolated grid' with a lightning bolt icon inside a square.</p>
<p>PROJECT SCENARIO Displacement of fossil-fuel-fired power plants in the isolated grid by expansion of an interconnected grid to the isolated electricity system.</p>	 <p>The diagram illustrates the project scenario. On the left, a box labeled 'Fossil fuel' with a flame icon is connected by an arrow to a box labeled 'Grid' with a lightning bolt icon inside a square. From the 'Grid', two arrows branch out: one points to a box labeled 'CO₂' with a flame icon, and the other points to a box labeled 'Electricity' with a lightning bolt icon. From the 'Electricity' box, an arrow points to a box labeled 'Connected grid' with a lightning bolt icon inside a square. In the background, the 'Fossil fuel' and 'Power plant' boxes from the baseline scenario are shown with a large 'X' over them, indicating they are displaced. The 'CO₂' box from the baseline scenario is also shown with a large 'X' over it, indicating its displacement.</p>

AM0046 Distribution of efficient light bulbs to households

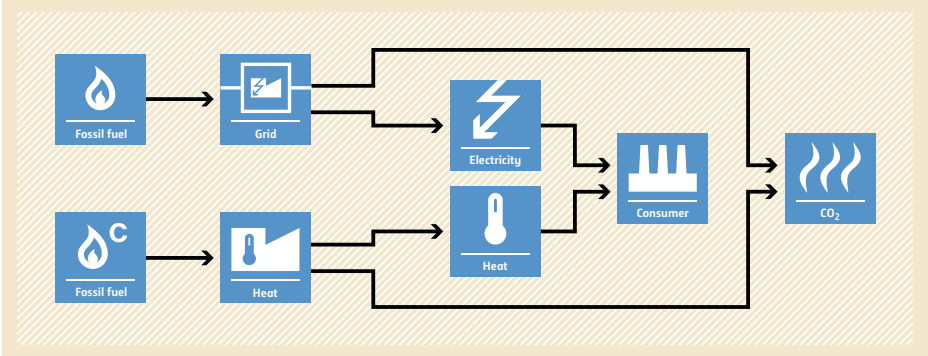
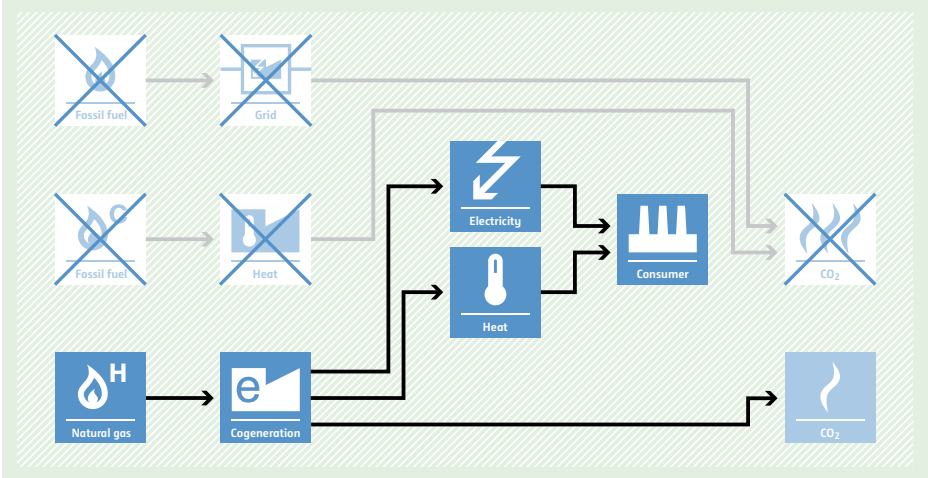


<p>Typical project(s)</p>	<p>Compact fluorescent lamps (CFLs) are sold at a reduced price, or donated to households to replace incandescent lamps (ICL).</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Displacement of less-efficient lighting by more-efficient technology.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The households are within a distinct geographical area and are connected to the electricity grid and no other CDM project that may affect the energy efficiency of lighting in households located within the total project area has been registered; • A maximum of four CFLs can be distributed or sold to each household and these CFLs have to be more efficient and have the same or a lower lumen output as the previously used ICL; • The displaced light bulbs have a maximum rated power of 100 W and are returned to the project coordinator, who ensures destruction of the light bulbs; • Electricity consumption from lighting has to be monitored in a baseline sample group (BSG) and a project sample group (PSG). The project coordinator implements a social lottery system as an incentive among all households included in the BSG and the PSG.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • The average grid voltage in the low-voltage part of the grid, the power rating and the P-U characteristic curve of the distributed light are determined before the start of the project; • Grid emission factor (alternatively monitored). <p>Monitored:</p> <ul style="list-style-type: none"> • Electricity consumed to provide lighting (or utilization hours and power rating of lighting appliance) for household within the BSG and PSG; • Number of project ICL and scrapped light bulbs; • Technical distribution losses in the grid.
<p>BASELINE SCENARIO Less-energy-efficient bulbs are used in households resulting in higher electricity demand.</p>	<pre> graph LR FF[Fossil fuel] --> G[Grid] G --> E[Electricity] G --> CO2[CO2] E --> L[Lighting] </pre>
<p>PROJECT SCENARIO More-energy-efficient CFLs are used in households saving electricity and thus reducing GHG emissions.</p>	<pre> graph LR FF[Fossil fuel] --> G[Grid] G --> E[Electricity] G --> CO2[CO2] E --> U[Upgrade] U --> L[Lighting] </pre>

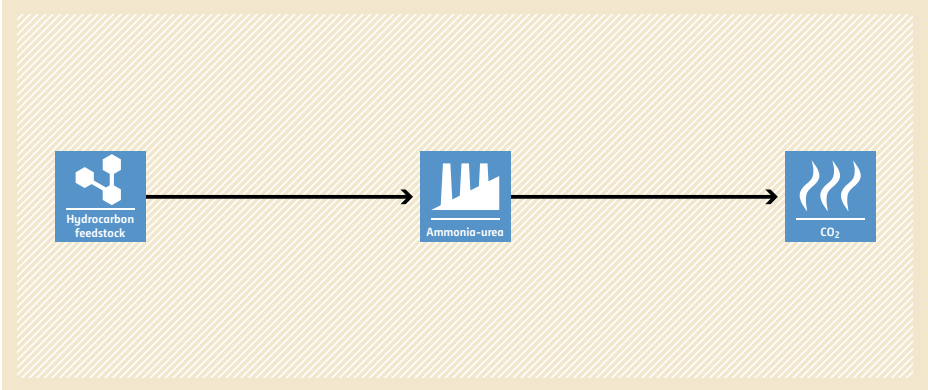
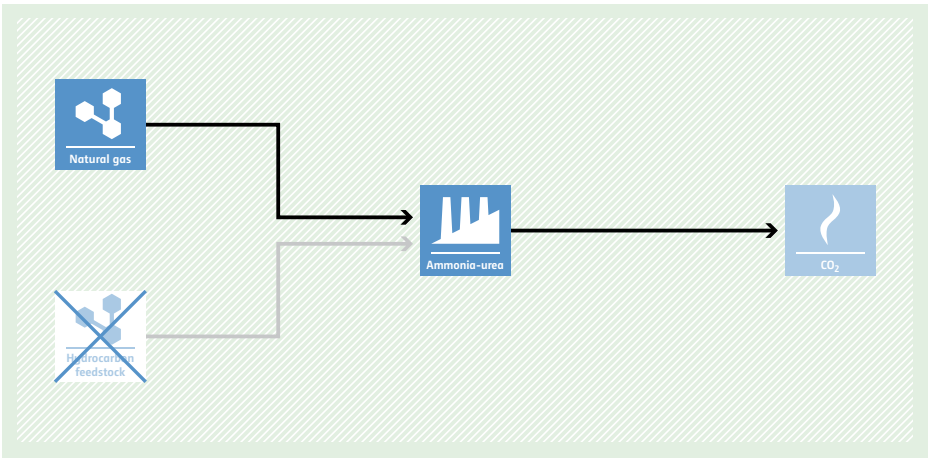
AM0048 New cogeneration project activities supplying electricity and heat to multiple customers

<p>Typical project(s)</p>	<p>Fossil-fuel-fired cogeneration project supplying heat and electricity to multiple project customers.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. • Switch to cogeneration of steam and electricity.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Installation of a new fossil fuel fired cogeneration facility(ies) that supply heat and electricity to: (i) existing or new recipients; (ii) supply electricity to grid; and/or (iii) supply heat to heat networks; • The baseline scenario for the project activity is a construction of a new fossil fuel based electricity generation facility and a construction of a new fossil-fuel based heat generation facility.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of electricity generated by the project and supplied to recipient facility(ies) and/or the power grid; • Quantity of steam or hot water generation by the project and supplied to recipient facility(ies) and/or heat networks.
<p>BASELINE SCENARIO Separate heat and electricity production.</p>	
<p>PROJECT SCENARIO Cogeneration of electricity and heat.</p>	

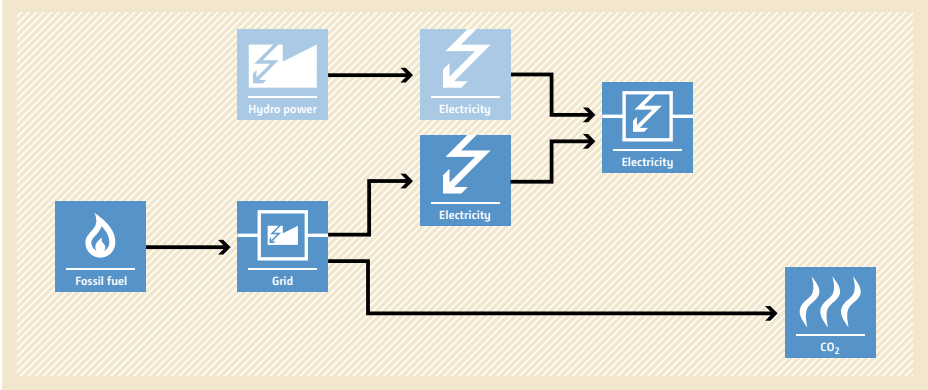
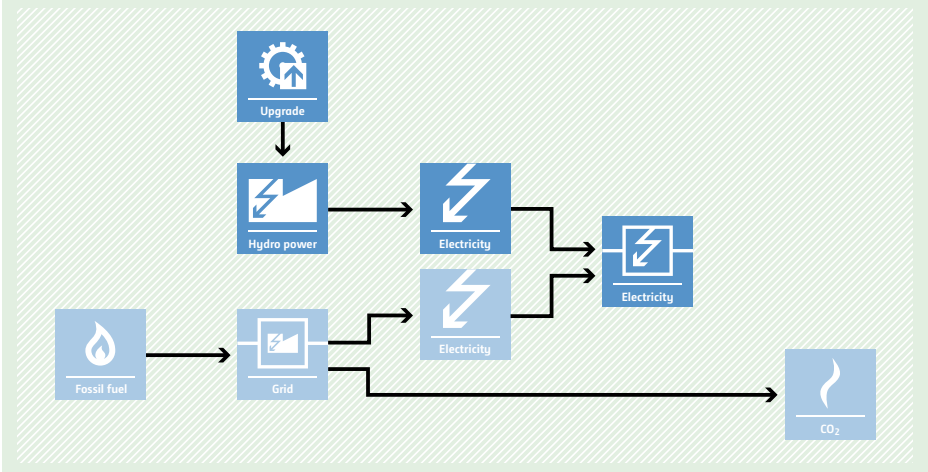
AM0049 Methodology for gas based energy generation in an industrial facility

<p>Typical project(s)</p>	<p>Installation of gas-based energy generation systems, either separate or cogeneration, at an existing industrial facility to meet its own electricity and/or steam/heat demand.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Fuel switch; • Energy efficiency. <p>Displacement of more-carbon-intensive fuel with less-carbon-intensive fuel.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Prior to the project implementation, the existing industrial facility produces its own thermal energy and maybe electricity, but the electricity supply is not enough to meet its own demand; • Coal or oil is replaced by natural gas or methane-rich gas, which shall be sufficiently available in the region or country; • There are no regulatory requirements for fuel switch or technology upgrade; • The project does not change the quality requirement of steam/heat; • Electricity export to the power grid, if any, is on ad-hoc basis and consists of less than 10% of the total electricity produced by the project power plant.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Grid emission factor. <p>Monitored:</p> <ul style="list-style-type: none"> • Electricity generation and export of the project power plant; • Efficiency of the baseline and project fuel combustion systems; • Flow rate, pressure and temperature of heat carrier at inlet and outlet of waste heat generation sources; • Fuel consumption by the project plant.
<p>BASELINE SCENARIO On-site generation of heat using coal or oil and import of electricity from the grid.</p>	 <p>The diagram illustrates the baseline scenario. On the left, two boxes labeled 'Fossil fuel' (one with a flame icon, one with a flame and 'C' icon) have arrows pointing to 'Grid' and 'Heat' boxes respectively. From the 'Grid' box, an arrow points to an 'Electricity' box. From the 'Heat' box, an arrow points to a 'Heat' box. Both the 'Electricity' and 'Heat' boxes have arrows pointing to a 'Consumer' box (represented by a factory icon). From the 'Consumer' box, an arrow points to a 'CO₂' box (represented by a flame icon).</p>
<p>PROJECT SCENARIO Installation of energy generation systems, either separate or cogeneration, to supply electricity and/or steam/heat using natural gas or methane-rich gas.</p>	 <p>The diagram illustrates the project scenario. On the left, a 'Natural gas' box (flame with 'H' icon) has an arrow pointing to a 'Cogeneration' box (flame with 'e' icon). From the 'Cogeneration' box, two arrows point to 'Electricity' and 'Heat' boxes. From the 'Electricity' box, an arrow points to a 'Consumer' box (factory icon). From the 'Heat' box, an arrow points to the same 'Consumer' box. From the 'Consumer' box, an arrow points to a 'CO₂' box (flame icon). In the background, the 'Fossil fuel', 'Grid', and 'Heat' boxes from the baseline scenario are shown but crossed out with large 'X' marks, indicating they are no longer part of the project scenario.</p>

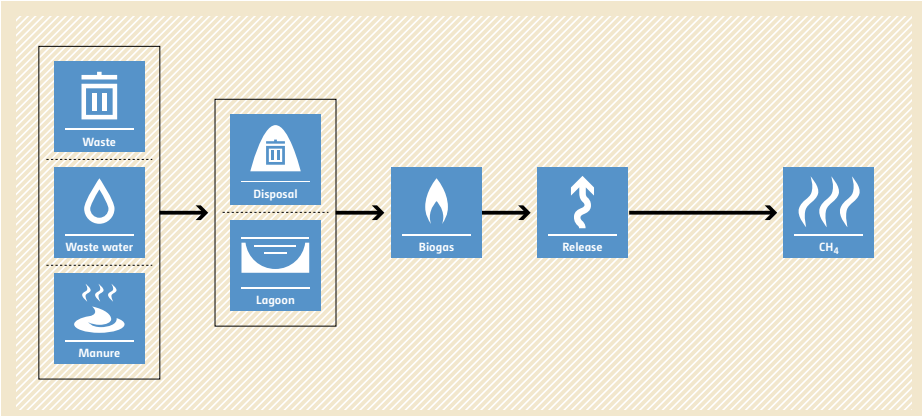
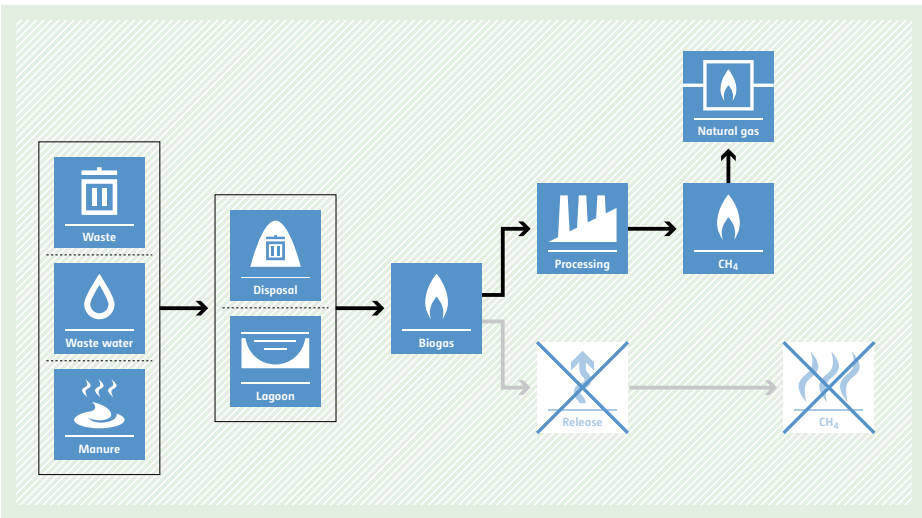
AM0050 Feed switch in integrated ammonia-urea manufacturing industry

<p>Typical project(s)</p>	<p>Feed switch from existing hydrocarbon feedstock (i.e. naphtha, heavy oils, coal, lignite and coke) to natural gas, either completely or partially, in an existing integrated ammonia-urea manufacturing facility, with optional implementation of a CO₂ recovery plant within the manufacturing facility.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Feedstock switch. <p>Displacement of more-GHG-intensive feedstock (naphtha, heavy oils, coal, lignite and coke) with less-GHG-intensive feedstock (natural gas).</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project activity should not result in the increase of the production capacity beyond 10% of the existing capacity, and change in production process; • Natural gas is sufficiently available in the region or country; • The integrated ammonia-urea manufacturing facility is an existing plant with a historical operation of at least three years prior to the implementation of the project; • Prior to the implementation of the project, no natural gas has been used in the integrated ammonia-urea manufacturing facility.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Urea production in the most recent three years; • Quantity of each existing feedstock used as feed in the most recent three years; • Quantity of fuel consumed in furnaces in the most recent three years. <p>Monitored:</p> <ul style="list-style-type: none"> • Urea production in the project; • Quantity of natural gas used as feed in the project; • Quantity of fuel consumed in furnaces in the project; • Quantity and CO₂ emission factor of electricity consumed by the CO₂ recovery plant.
<p>BASELINE SCENARIO</p> <p>The integrated ammonia-urea manufacturing facility continues to use existing hydrocarbon feedstock as the feed emitting excess CO₂, not used by the urea plant, into atmosphere.</p>	 <p>The diagram shows a linear process flow. It starts with a blue icon labeled 'Hydrocarbon feedstock' (a molecular structure). An arrow points to a blue icon labeled 'Ammonia-urea' (a factory). A second arrow points to a blue icon labeled 'CO₂' (flames). The entire flow is set against a light orange background with a diagonal hatched pattern.</p>
<p>PROJECT SCENARIO</p> <p>The feed to the integrated ammonia-urea manufacturing facility is switched from existing hydrocarbon feedstock to natural gas, if required in combination with the implementation of a CO₂ recovery, to reduce the emission of excess CO₂.</p>	 <p>The diagram shows a similar process flow to the baseline, but with a change. A blue icon labeled 'Natural gas' (a flame) now has an arrow pointing to the 'Ammonia-urea' factory icon. The 'Hydrocarbon feedstock' icon is crossed out with a blue 'X'. The 'CO₂' icon remains. The entire flow is set against a light green background with a diagonal hatched pattern.</p>

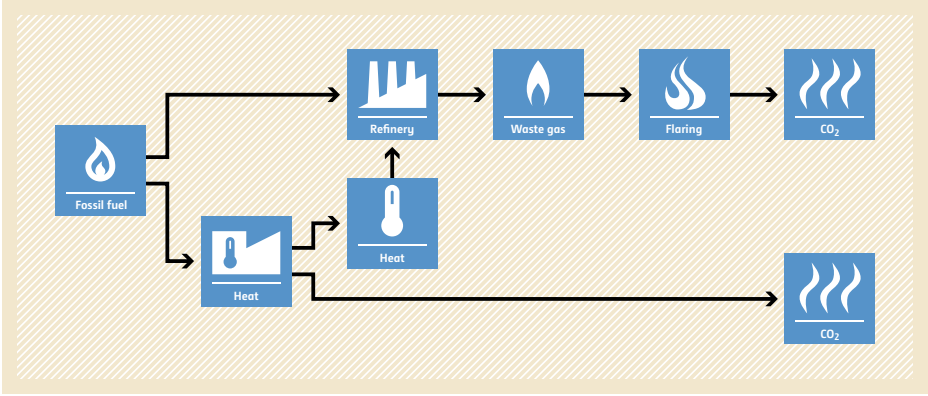
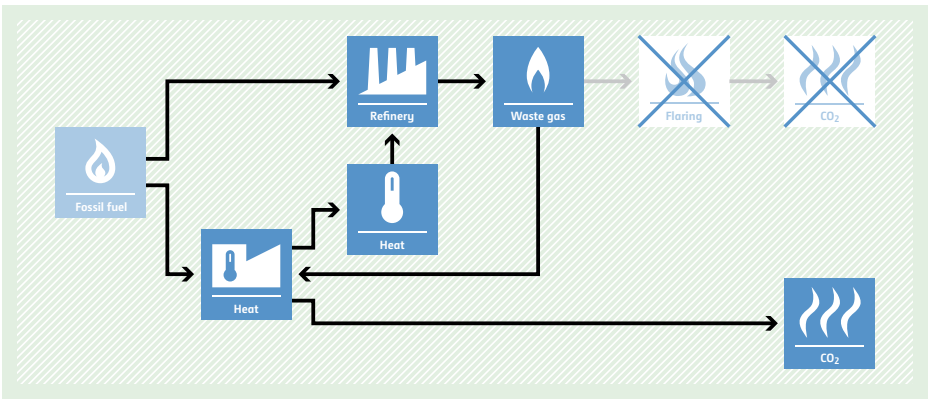
AM0052 Increased electricity generation from existing hydropower stations through decision support system optimization

<p>Typical project(s)</p>	<p>Increased annual generation of electricity through the introduction of a Decision Support System (DSS) that optimizes the operation of the existing hydropower facility/ies, both run-of-the-river and reservoir-based type, connected to a grid.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy. <p>Displacement of electricity that would have been provided by more-GHG-intensive means.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Recorded data is available for a minimum of three years to establish the baseline relationship between water flow and power generation; • Hydropower units, covered under the project, have not undergone and will not undergo significant upgrades beyond basic maintenance (e.g. replacement of runners) that affect the generation capacity and/or expected operational efficiency levels during the crediting period; • No major changes in the reservoir size (e.g. increase of dam height) or to other key physical system elements (e.g. canals, spillways) that would affect water flows within the project boundary, have been implemented during the baseline data period or will be implemented during the crediting period.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Grid emission factor (can also be monitored ex post); • Measurement data of headwater level, vertical opening of spillway, power output etc. from previous year before project implementation as well as power polynomial coefficients (hill diagram). <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of electricity generated by each hydropower unit in the project.
<p>BASELINE SCENARIO Additional electricity would be produced by more-GHG-intensive power plants connected to the grid.</p>	 <p>The diagram illustrates the baseline scenario. On the left, a 'Fossil fuel' icon (flame) and a 'Hydro power' icon (lightning bolt) both feed into a 'Grid' icon (power plug). From the 'Grid', two arrows point to two separate 'Electricity' icons (lightning bolts). These two 'Electricity' icons then feed into a final 'Electricity' icon. A third arrow from the 'Grid' points directly to a 'CO2' icon (flame with wavy lines), representing emissions from fossil fuel-based electricity generation.</p>
<p>PROJECT SCENARIO Introduction of a Decision Support System (DSS) increases the supply of electricity generated by existing hydropower units to the grid, thereby reducing the amount of more-GHG-intensive electricity in the grid.</p>	 <p>The diagram illustrates the project scenario. An 'Upgrade' icon (gear) points to a 'Hydro power' icon (lightning bolt). This 'Hydro power' icon, along with a 'Fossil fuel' icon (flame), feeds into a 'Grid' icon (power plug). From the 'Grid', two arrows point to two separate 'Electricity' icons (lightning bolts). These two 'Electricity' icons then feed into a final 'Electricity' icon. A third arrow from the 'Grid' points to a 'CO2' icon (flame with wavy lines), representing emissions. The 'CO2' icon is smaller than in the baseline scenario, indicating reduced emissions due to the increased supply of electricity from the optimized hydropower units.</p>

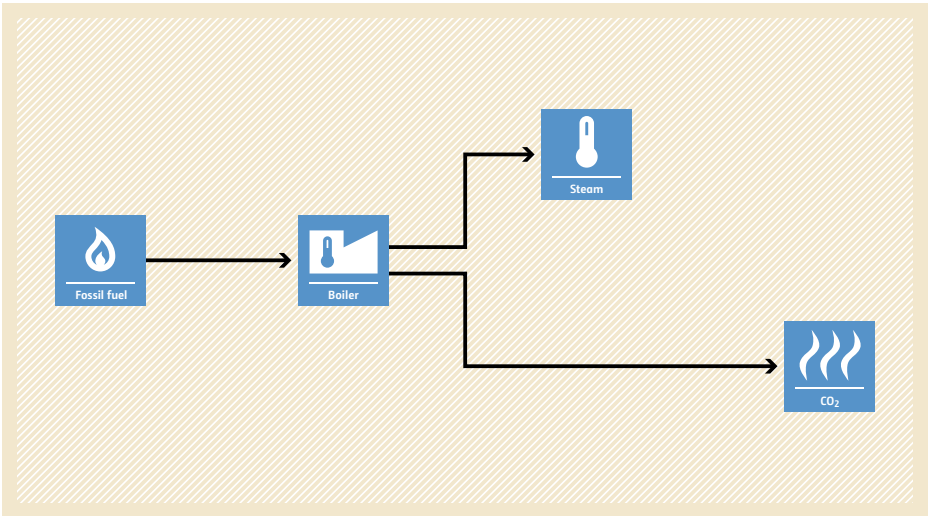
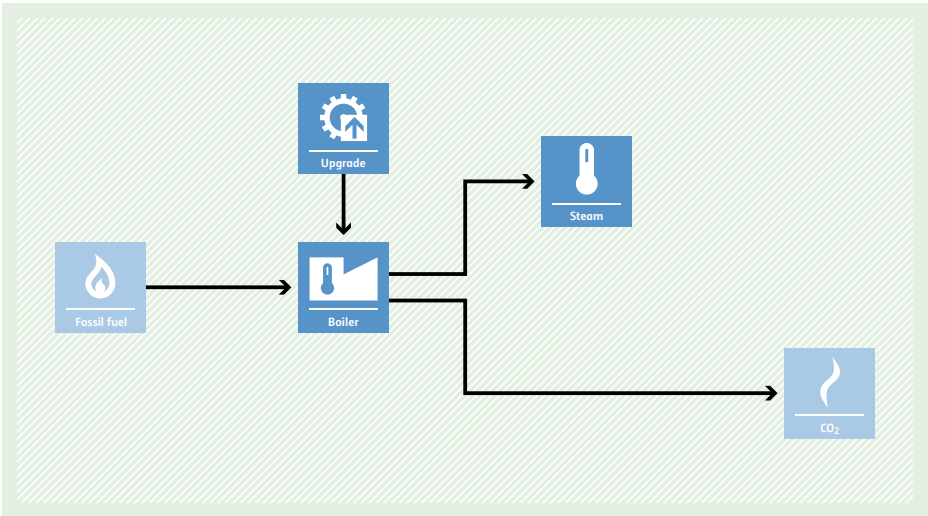
AM0053 Biogenic methane injection to a natural gas distribution grid

<p>Typical project(s)</p>	<p>Recovering of biogas generated by anaerobic decomposition of organic matter in wastewater treatment systems, animal waste management systems, etc., processing and upgrading the biogas to the quality of natural gas and distributing it as energy source via a natural gas distribution grid.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy; • GHG emission avoidance. <p>Avoidance of CH₄ emissions and displacement of use of natural gas in a natural gas distribution grid.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The biogas was either vented or flared prior to implementation of the project activity and would continue to be either vented or flared in the absence of the project activity; • The geographical extent of the natural gas distribution grid is within the host country; • One or several of the following technologies are used to upgrade biogas to natural gas quality: pressure swing adsorption; absorption with/without water circulation; absorption with water, with or without water recirculation; membrane CO₂ removal technology.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity and net calorific value of upgraded biogas injected to the natural gas distribution grid; • Quantity of biogas captured at the source of biogas generation; • Concentration of methane in biogas at the source of biogas generation.
<p>BASELINE SCENARIO Biogas is vented or flared and natural gas distribution grid is supplied by natural gas extracted from gas wells.</p>	 <p>The baseline scenario flowchart shows a process starting with three input boxes: 'Waste' (trash can icon), 'Waste water' (water drop icon), and 'Manure' (cow icon). Arrows from these boxes point to a central box containing 'Disposal' (trash can icon) and 'Lagoon' (pond icon). From this central box, an arrow points to a 'Biogas' box (flame icon). From 'Biogas', an arrow points to a 'Release' box (upward arrow icon). Finally, an arrow points from 'Release' to a 'CH₄' box (flame icon).</p>
<p>PROJECT SCENARIO Biogas is recovered, processed, upgraded and supplied to the natural gas distribution grid and replaces additional natural gas from gas wells.</p>	 <p>The project scenario flowchart follows the same initial steps as the baseline: 'Waste', 'Waste water', and 'Manure' feed into 'Disposal' and 'Lagoon', which produces 'Biogas'. However, from the 'Biogas' box, an arrow points to a 'Processing' box (factory icon). From 'Processing', an arrow points to a 'CH₄' box (flame icon), which then points to a 'Natural gas' box (flame icon). Additionally, an arrow from 'Biogas' points to a 'Release' box (upward arrow icon) which is crossed out with a blue 'X'. An arrow from this crossed-out 'Release' box points to another crossed-out 'CH₄' box (flame icon), indicating that methane emissions are avoided.</p>

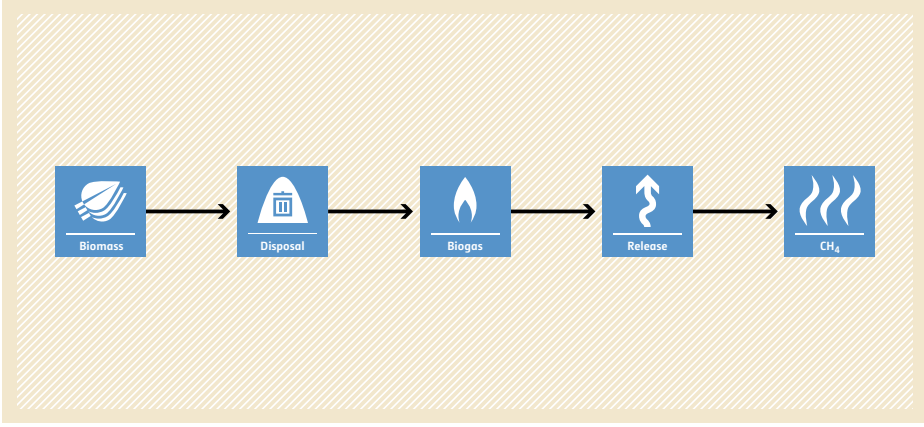
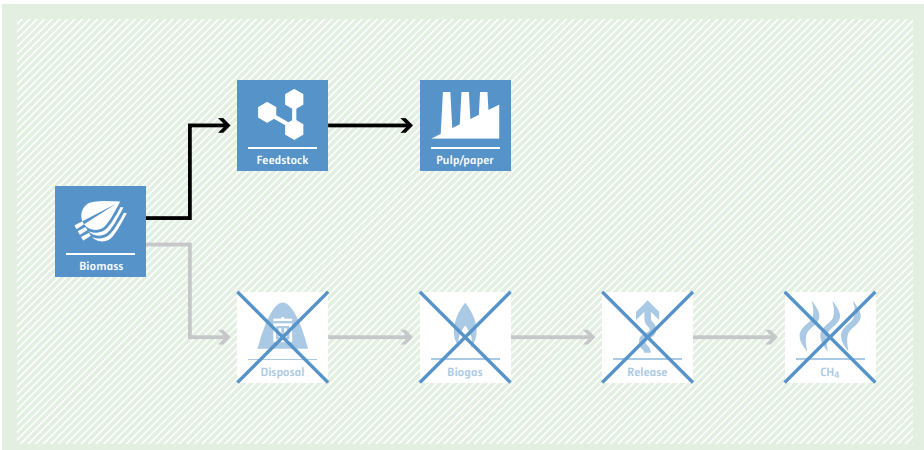
AM0055 Recovery and utilization of waste gas in refinery or gas plant

<p>Typical project(s)</p>	<p>The project activity is implemented in existing refinery facilities or gas plants to recover waste gas, which is characterized by its low pressure or a low heating value and that is currently being flared to generate process heat in element process(es) (e.g. for the purpose of steam generation by a boiler or hot air generation by a furnace). Recovered waste gas is a by-product generated in several processing units of the refinery or gas plant.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. • Displacement of fossil fuel used for heat production by recovered waste gas.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Waste gases from the refinery or gas plant, used under the project activity, were flared (not vented) for the last three years prior to the implementation of the project activity; • The waste gas recovery device is placed just before the flare header (with no possibility of diversions of the recovered gas flow) and after all the waste gas generation devices; • The recovered waste gas replaces fossil fuel that is used for generating heat for processes within the same refinery or gas plant; • The composition, density and flow of waste gas are measurable.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Historical annual average amount of waste gas sent to flares before the project implementation. <p>Monitored:</p> <ul style="list-style-type: none"> • Parameters to calculate the emission factor for consumed electricity; • Amount and composition of recovered waste gas (e.g. density, LHV) and data needed to calculate the emission factor of fossil fuel used for process heating and steam generation within the refinery or gas plant.
<p>BASELINE SCENARIO Use of fossil fuel to generate process heat. Waste gas is flared.</p>	 <p>The diagram shows a flow from 'Fossil fuel' to 'Heat'. This 'Heat' is used in a 'Refinery'. The 'Refinery' produces 'Waste gas', which is then sent to 'Flaring', resulting in 'CO2' emissions.</p>
<p>PROJECT SCENARIO Use of recovered waste gas to generate process heat. Thereby, fossil fuel usage is reduced and waste gas is not flared anymore.</p>	 <p>The diagram shows a flow from 'Fossil fuel' to 'Heat'. This 'Heat' is used in a 'Refinery'. The 'Refinery' produces 'Waste gas', which is then used to generate 'Heat' (indicated by a feedback loop). This 'Heat' is used in the 'Refinery'. The 'Waste gas' is not flared (indicated by a crossed-out 'Flaring' box), resulting in reduced 'CO2' emissions.</p>

AM0056 Efficiency improvement by boiler replacement or rehabilitation and optional fuel switch in fossil fuel-fired steam boiler systems

<p>Typical project(s)</p>	<p>Complete replacement of existing boilers by new boilers with a higher efficiency in an existing facility with steam demands or retrofitting of existing boilers in order to increase their efficiency; or a combination with one or both activities described above and a switch in the type of fossil fuel used to fuel boilers.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. • Technology switch resulting in an increase in energy efficiency.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project boilers utilize fossil fuels to produce steam; • The compliance with national/local regulations are not the cause of the development of the project; • Steam quality (i.e. steam pressure and temperature) is the same prior and after the implementation of the project; • Only one type of fossil fuel is used in all boilers included in the project boundary.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of fuel used in the boilers; • Quantity of steam produced; • Temperature and pressure of the steam produced.
<p>BASELINE SCENARIO Continuation of the current situation, i.e. use of the existing boilers without fossil fuel switch, replacement or retrofit of the boilers.</p>	 <p>The diagram illustrates the baseline scenario. It shows a flow from 'Fossil fuel' (represented by a flame icon) to a 'Boiler' (represented by a boiler icon). From the boiler, two arrows branch out: one pointing to 'Steam' (represented by a thermometer icon) and another pointing to 'CO₂' (represented by a flame icon with wavy lines).</p>
<p>PROJECT SCENARIO Complete replacement of boilers, and/or retrofitting of an existing steam generating system results in higher efficiency and less consumption of fossil fuel (fuel switch may also be an element of the project scenario).</p>	 <p>The diagram illustrates the project scenario. It shows a flow from 'Fossil fuel' (represented by a flame icon) to a 'Boiler' (represented by a boiler icon). Above the boiler is an 'Upgrade' icon (represented by a gear and a house). An arrow points from the 'Upgrade' icon down to the 'Boiler' icon. From the boiler, two arrows branch out: one pointing to 'Steam' (represented by a thermometer icon) and another pointing to 'CO₂' (represented by a flame icon with wavy lines).</p>

AM0057 Avoided emissions from biomass wastes through use as feed stock in pulp and paper, cardboard, fibreboard or bio-oil production

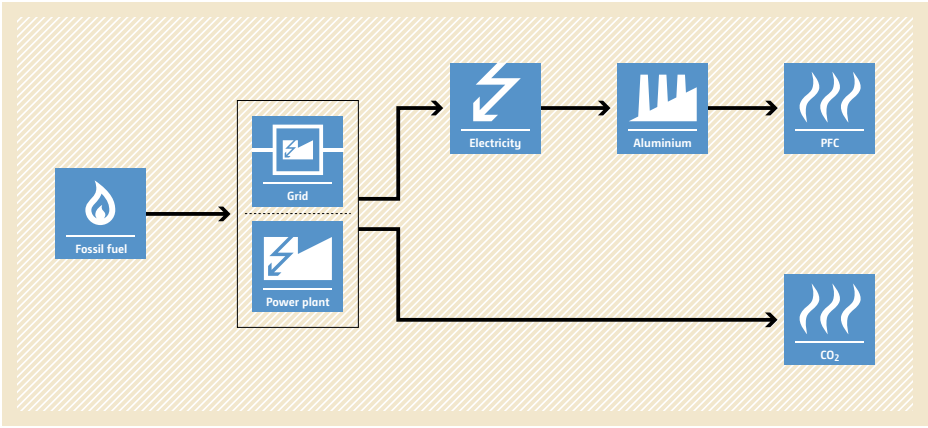
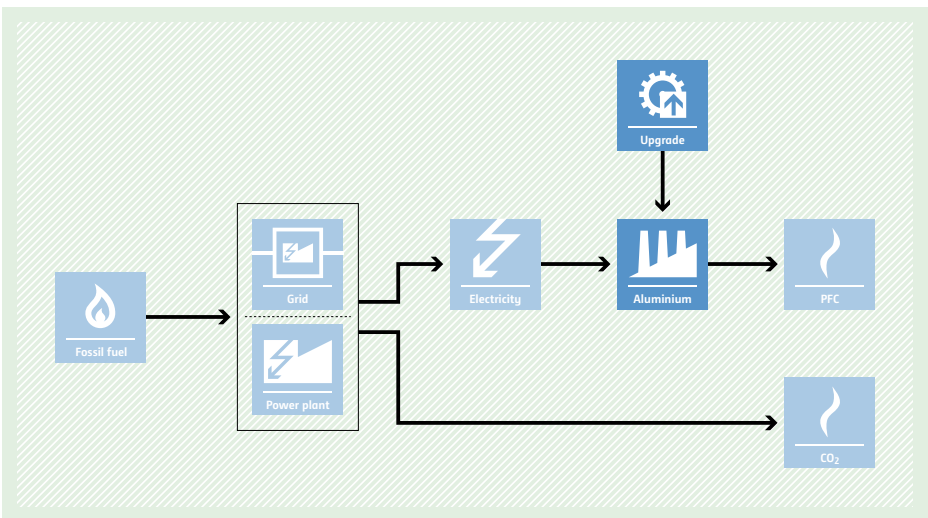
<p>Typical project(s)</p>	<p>Agricultural wastes are used as feed stock for pulp, paper, cardboard, fibreboard or bio-oil production in a new facility, where the end product is similar in characteristics and quality to existing high quality products in the market and does not require special use or disposal methods.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG emission avoidance. • Avoidance of CH₄ emissions.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • A new production facility is being constructed; • Waste is not stored in conditions that would generate methane; • Production does not involve processes that emit significant additional greenhouse gas emissions except from those arising directly from pyrolysis (bio-oil only) processes that were also used in the baseline or associated with electricity or fossil fuel consumption; • If biomass is combusted for the purpose of providing heat or electricity to the plant, then the biomass fuel is derived from biomass residues; • In the case of bio-oil, the pyrolyzed residues (char) will be further combusted and the energy derived thereof used in the project.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of waste used as feedstock; • Fossil fuel and electricity consumption; • Transportation parameter – distance, fuel type and load details; • Agricultural waste residues – produced in the region, used in and outside the project and surplus.
<p>BASELINE SCENARIO Agricultural residues are left to decay anaerobically.</p>	 <p>The baseline scenario flowchart shows a linear process starting with 'Biomass' (represented by a leaf icon). An arrow points to 'Disposal' (represented by a trash can icon). Another arrow points to 'Biogas' (represented by a flame icon). A third arrow points to 'Release' (represented by an upward arrow icon). A final arrow points to 'CH₄' (represented by a flame icon). The entire flowchart is set against a light orange background with a diagonal hatched pattern.</p>
<p>PROJECT SCENARIO Agricultural residues are used as feedstock in a new facility for producing paper, pulp, cardboard, fibreboard or bio-oil.</p>	 <p>The project scenario flowchart shows a branching process starting with 'Biomass' (represented by a leaf icon). One arrow points to 'Feedstock' (represented by a factory icon), which then points to 'Pulp/paper' (represented by a factory icon). A second arrow from 'Biomass' points to a crossed-out 'Disposal' icon. This is followed by a sequence of crossed-out icons: 'Biogas', 'Release', and 'CH₄'. The entire flowchart is set against a light green background with a diagonal hatched pattern.</p>

AM0058 Introduction of a new primary district heating system



<p>Typical project(s)</p>	<p>Introduction of a district heating system supplying heat from a fossil fuel-fired power plant and/or by new centralised boilers. It replaces decentralised fossil fuel fired heat only boilers.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Energy efficiency. <p>Displacement of fossil-fuel-based heat generation by utilization of heat extracted from a power plant and/or by a more efficient centralized fossil fuel fired boiler.</p>
<p>Important conditions under which the methodology is applicable</p>	<p>The heat supplied by the project is either from:</p> <ul style="list-style-type: none"> Existing grid connected thermal power plant with no steam extraction for heating purposes, other than that required for the operation of the power plant auxiliary systems, prior to the project activity; or A new centralised heat only boiler(s); or A combination of both (a) and (b).
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Efficiency of the heat supply and fuel types in the baseline; Minimum and maximum power generation during the last three years. <p>Monitored:</p> <ul style="list-style-type: none"> Quantity of heat from the cogeneration plant and from all heat only/peak load boilers in the project; Quantity of heat supplied from each sub-station to the buildings.
<p>BASELINE SCENARIO Fossil fuel is used in a power plant that only supplies grid electricity; fossil fuel is used in individual boilers that supply heat to users.</p>	
<p>PROJECT SCENARIO A new district heating network is supplied by heat provided by a power plant and/or centralized boilers.</p>	

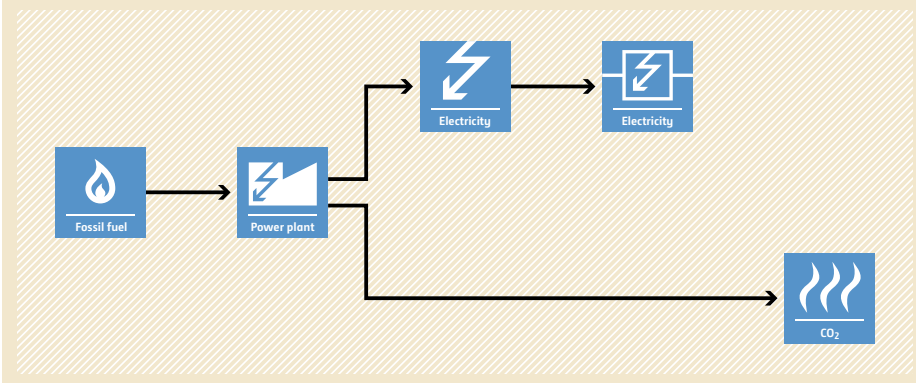
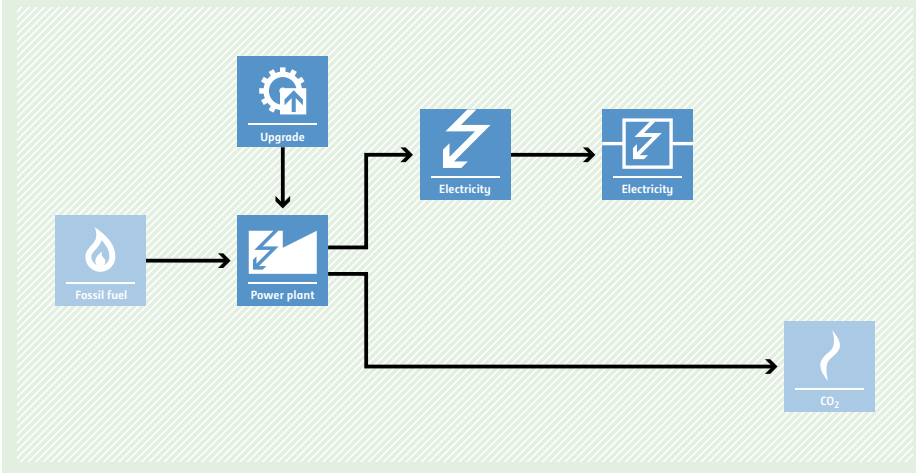
AM0059 Reduction in GHGs emission from primary aluminium smelters

<p>Typical project(s)</p>	<p>Technology improvement at a primary aluminium smelter (PFPB, CWPB, SWPB, VSS or HSS) using computerized controls or improved operating practices, to reduce PFC emissions and/or to improve electrical energy efficiency.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency; • GHG emission avoidance. <p>Avoidance of PFC emissions and electricity savings leading to less GHG emissions.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project is limited to changes of the smelting technology; • At least three years of historical data for estimating baseline emissions are available.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • If less than 95% of the anode effects are manually terminated, number and duration of anode effect or anode effect over-voltage, and current efficiency; • PFC emissions; • If applicable: grid emission factor (can also be monitored ex post). <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of aluminium produced in the project; • Quantity of electricity imported from captive plants and the grid; • PFC emissions; • If applicable: electricity factor for captive generated electricity.
<p>BASELINE SCENARIO Electricity is consumed to produce aluminium and the production process leads to PFC emissions.</p>	 <p>The baseline scenario flowchart shows the process from fossil fuel to emissions. Fossil fuel is used to generate electricity from the grid and power plants. This electricity is then used in an aluminium smelter to produce aluminium, which results in PFC emissions and CO2 emissions.</p>
<p>PROJECT SCENARIO Less electricity is consumed to produce aluminium and the production process leads to less PFC emissions.</p>	 <p>The project scenario flowchart is similar to the baseline but includes an 'Upgrade' step before the aluminium smelter. This upgrade leads to less electricity being consumed and, consequently, fewer PFC emissions.</p>

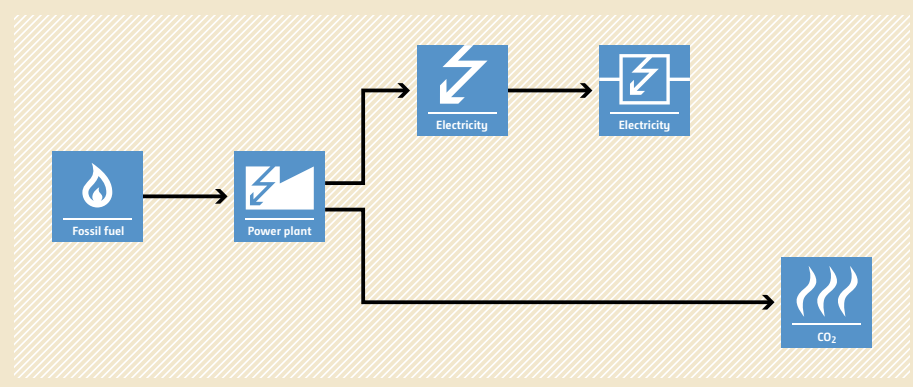
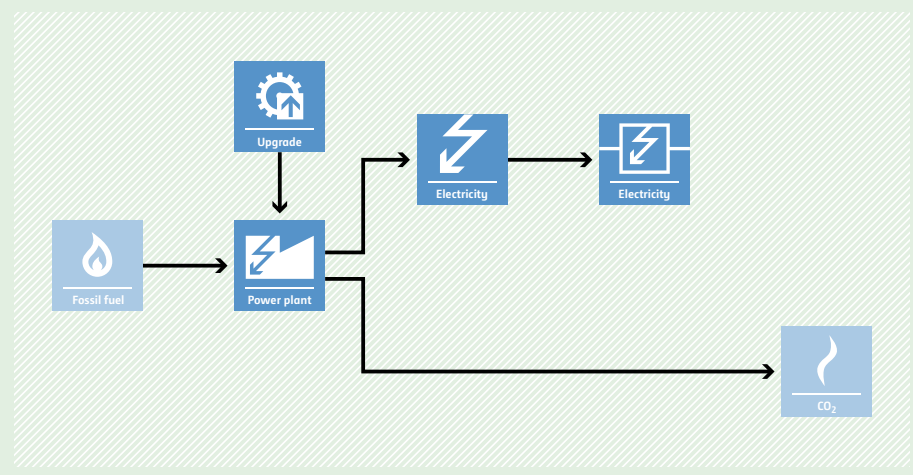
AM0060 Power saving through replacement by energy efficient chillers

<p>Typical project(s)</p>	<p>The one-to-one replacement of existing electricity-driven chillers by more-energy-efficient new chillers with similar rated output capacity to the existing ones.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Electricity savings through energy efficiency improvement.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • For each chiller replacement, the rated output capacity of the new chiller is not significantly larger or smaller (maximum $\pm 5\%$) than the existing chiller; • The chiller is used to generate chilled water or a water/antifreeze mixture (e.g. water with addition of glycol) for process cooling or air conditioning; • The existing and new chillers are driven by electrical energy; • The existing chillers are functioning and fully operational and can continue to operate for several years if regular maintenance is undertaken; • The existing chillers are destroyed, and the refrigerant contained in the existing chiller will be recovered and destroyed, or stored in suitable containers.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Power consumption function of the existing chillers; • Grid emission factor (can also be monitored ex post). <p>Monitored:</p> <ul style="list-style-type: none"> • Average chiller output of the new chillers; • Average inlet temperature of condensing water of the new chillers; • Average inlet and outlet temperature of chilled water supplied by the new chillers.
<p>BASELINE SCENARIO Continued operation of the existing, less-energy-efficient chillers.</p>	
<p>PROJECT SCENARIO Operation of energy-efficient chillers, resulting in lower CO₂ emissions.</p>	

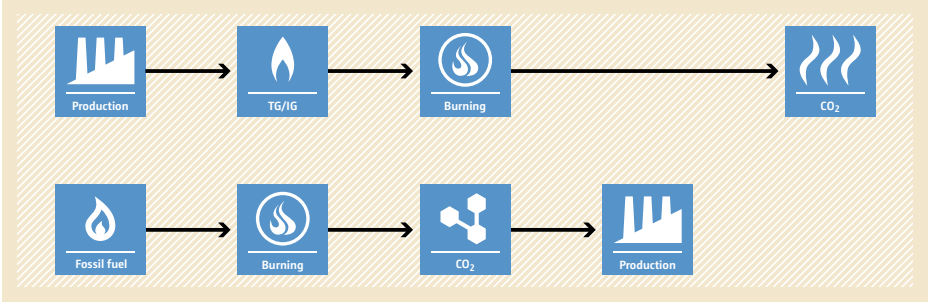
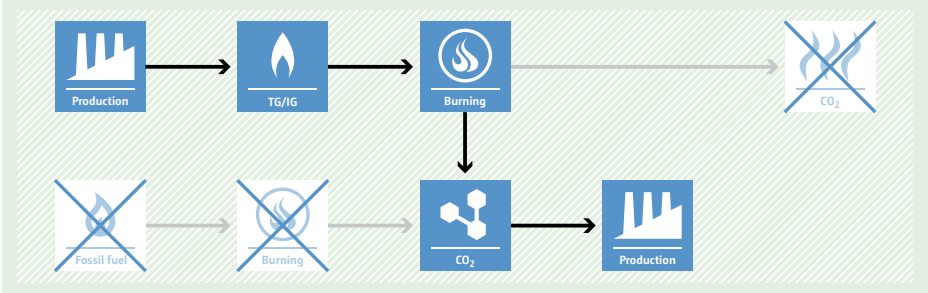
AM0061 Methodology for rehabilitation and/or energy efficiency improvement in existing power plants

<p>Typical project(s)</p>	<p>Implementation of measures to increase the energy efficiency of existing power plants that supply electricity to the grid. Examples of these measures are: the replacement of worn blades of a turbine by new ones; the implementation of new control systems; replacement of deficient heat exchangers in a boiler by new ones, or the installation of additional heat recovery units in an existing boiler.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Technology switch resulting in an increase in energy efficiency in an existing power plant.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project does not involve the installation and commissioning of new electricity generation units; • The designed power generation capacity of each unit may increase as a result of the project but this increase is limited to 15% of the former design power generation capacity of the whole plant; • The existing power plant has an operation history of at least 10 years and data on fuel consumption and electricity generation for the most recent five years prior to the implementation of the project are available; • Only measures that require capital investment can be included. Consequently, regular maintenance and housekeeping measures cannot be included in the project.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Energy efficiency of the project power plant; • Quantity of fuel used in the project power plant; • Calorific value and emission factor of the fuel used in the project power plant; • Electricity supplied to the grid by the project power plant.
<p>BASELINE SCENARIO Continuation of the operation of the power plant, using all power generation equipment already used prior to the implementation of the project, and undertaking business as usual maintenance.</p>	
<p>PROJECT SCENARIO Implementation of energy efficiency improvement measures or the rehabilitation of an existing fossil-fuel-fired power plant. As a result, less fossil fuel is consumed to generate electricity.</p>	

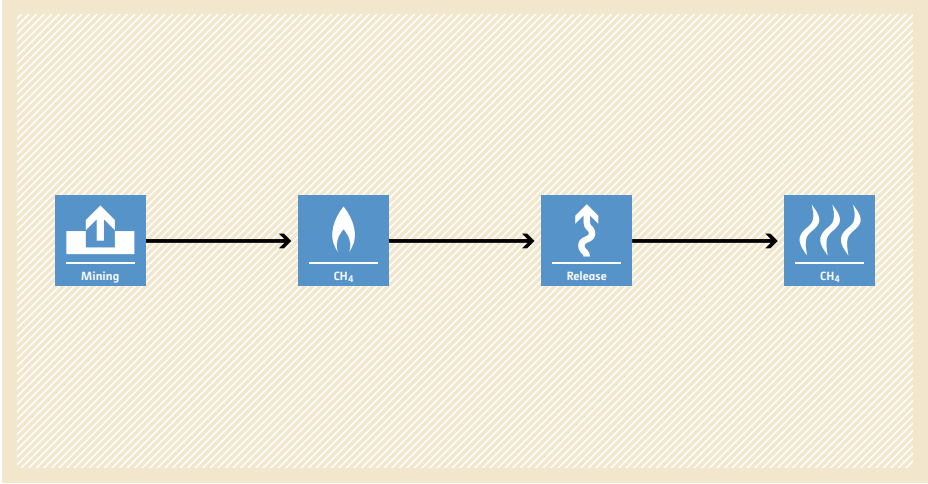
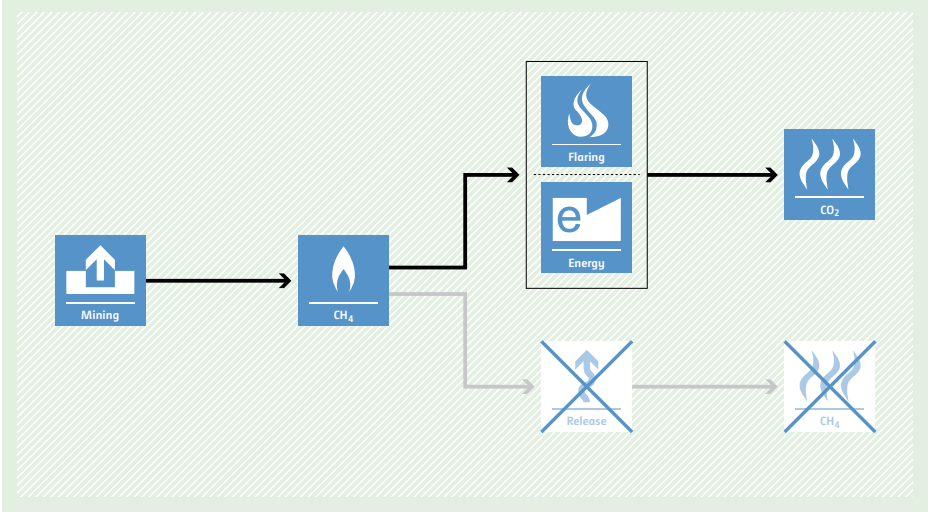
AM0062 Energy efficiency improvements of a power plant through retrofitting turbines

<p>Typical project(s)</p>	<p>Implementation of measures to increase the energy efficiency of steam or gas turbines in existing power plants that supply electricity to the grid. Examples of these measures are: replacement of worn blades of a turbine by new ones; implementation of refined sealing to reduce leakage; replacement of complete inner blocks (steam path, rotor, inner casing, inlet nozzles).</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Technology switch resulting in an increase in energy efficiency at an existing power plant.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project power plant utilizes fossil fuel to operate; • Measures related to recommended regular or preventive maintenance activities (including replacements and overhauling) as provided by the manufacturer of turbine, or superior practices of preventive maintenance (e.g. sophisticated cleaning systems resulting in improved efficiency) are not applicable; • The operational parameters that affect the energy efficiency of the turbine (e.g. steam pressure and temperature, quality of steam in the case of a saturated steam turbine; condenser vacuum, and combustion temperature for gas turbine) remain the same, subject to a variation of $\pm 5\%$, in the baseline and the project scenario; • The methodology is applicable up to the end of the lifetime of the existing turbine, if shorter than the crediting period.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity, calorific value and emission factor of fuel used in the project power plant; • Electricity supplied to the grid by the project power plant; • Enthalpy of the steam supplied to the turbine, in case of steam turbines.
<p>BASELINE SCENARIO Continuation of the current practice, i.e. the turbine continues to be operated without retrofitting.</p>	 <p>The diagram illustrates the baseline scenario. It starts with a box labeled 'Fossil fuel' with a flame icon. An arrow points to a box labeled 'Power plant' with a lightning bolt icon. From the 'Power plant' box, two arrows branch out: one points to a box labeled 'Electricity' with a lightning bolt icon, which then points to another 'Electricity' box; the other arrow points directly to a box labeled 'CO2' with a flame icon.</p>
<p>PROJECT SCENARIO Retrofitting of steam turbines and gas turbines with components of improved design to increase the energy efficiency in an existing fossil fuel power plant. Thus, fossil fuel consumption is reduced.</p>	 <p>The diagram illustrates the project scenario. It starts with a box labeled 'Fossil fuel' with a flame icon. An arrow points to a box labeled 'Power plant' with a lightning bolt icon. Above the 'Power plant' box is a box labeled 'Upgrade' with a gear icon and an upward arrow. An arrow points from 'Upgrade' to 'Power plant'. From the 'Power plant' box, two arrows branch out: one points to a box labeled 'Electricity' with a lightning bolt icon, which then points to another 'Electricity' box; the other arrow points to a box labeled 'CO2' with a flame icon. The overall flow is similar to the baseline, but the 'Upgrade' step is added to the power plant process.</p>

AM0063 Recovery of CO₂ from tail gas in industrial facilities to substitute the use of fossil fuels for production of CO₂

<p>Typical project(s)</p>	<p>Recovery of CO₂ from the tail gas (TG) generated by an existing industrial facility to substitute the combustion of fossil fuels at an existing conventional CO₂ production facility or a new CO₂ production plant; and use of intermediate gas (IG) of a new production facility, for recovery of CO₂ in a new CO₂ production plant, established as part of the project activity.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Feedstock switch. <p>Displacement of more-GHG-intensive feedstock with CO₂ recovered from the tail gas or intermediate gas.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The tail gas from the existing industrial facility has been produced for as long as the industrial facility has been in operation; • There exist at least three years of historical records to the operation of the industrial facility from which the tail gas is extracted; • Prior to the project implementation, the tail gas has either been used as fuel in the industrial facility without extraction of the CO₂ or has been flared; • The total amount of CO₂ produced at the project facility shall not be consumed at the project facility (e.g. for manufacturing of chemicals) and has to be sold within the host country; • The industrial facility does not utilize CO₂ in the intermediate gas for any other purpose in the production process.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Quantity of CO₂ produced at the existing CO₂ production facility; • Electricity and fuel consumption at the existing CO₂ production facility. <p>Monitored:</p> <ul style="list-style-type: none"> • Average carbon content and volume of the tail gas and/or intermediate gas delivered to the project CO₂ production facility; • Quantity of CO₂ produced at the project CO₂ production facility; • Average carbon content and volume of the off gas combusted at the industrial facility; • Amount and end use of CO₂ purchased by customers and date of delivery; • Quantity or volume of main product actually produced in year; • Quantity or volume of main product actually sold and delivered to customers.
<p>BASELINE SCENARIO Combustion of fossil fuel at a conventional CO₂ production facility.</p>	 <p>The diagram illustrates the baseline scenario in two rows. The top row shows a process flow: 'Production' (factory icon) leads to 'TG/IG' (flame icon), which leads to 'Burning' (flame icon), which finally leads to 'CO₂' (flame icon). The bottom row shows: 'Fossil fuel' (flame icon) leads to 'Burning' (flame icon), which leads to 'CO₂' (molecule icon), which leads to 'Production' (factory icon).</p>
<p>PROJECT SCENARIO Recovery of CO₂ from the tail gas/intermediate gas generated by an existing industrial facility for use at the project CO₂ production facility.</p>	 <p>The diagram illustrates the project scenario in two rows. The top row shows: 'Production' (factory icon) leads to 'TG/IG' (flame icon), which leads to 'Burning' (flame icon). From 'Burning', an arrow points to a crossed-out 'CO₂' (flame icon), indicating that CO₂ is not flared. Another arrow from 'Burning' points down to a 'CO₂' (molecule icon). The bottom row shows: a crossed-out 'Fossil fuel' (flame icon) leads to a crossed-out 'Burning' (flame icon), which leads to the 'CO₂' (molecule icon) from the row above, which then leads to 'Production' (factory icon).</p>

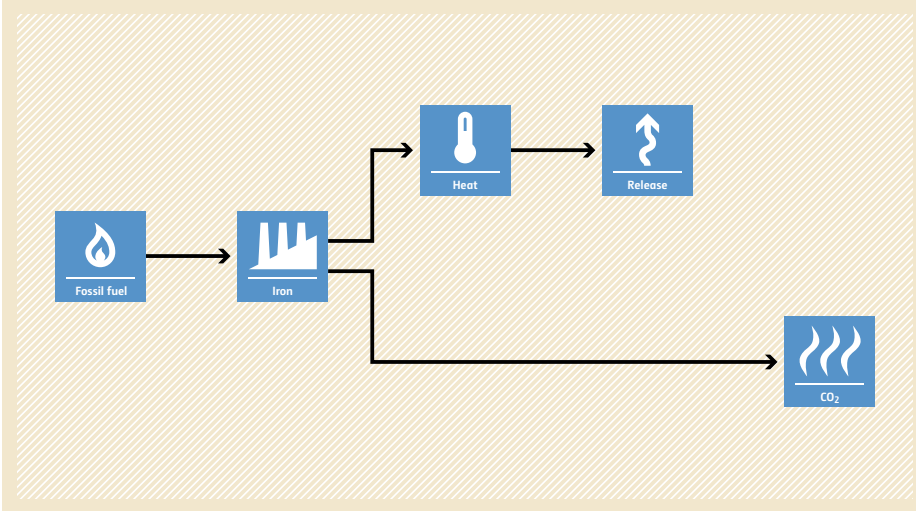
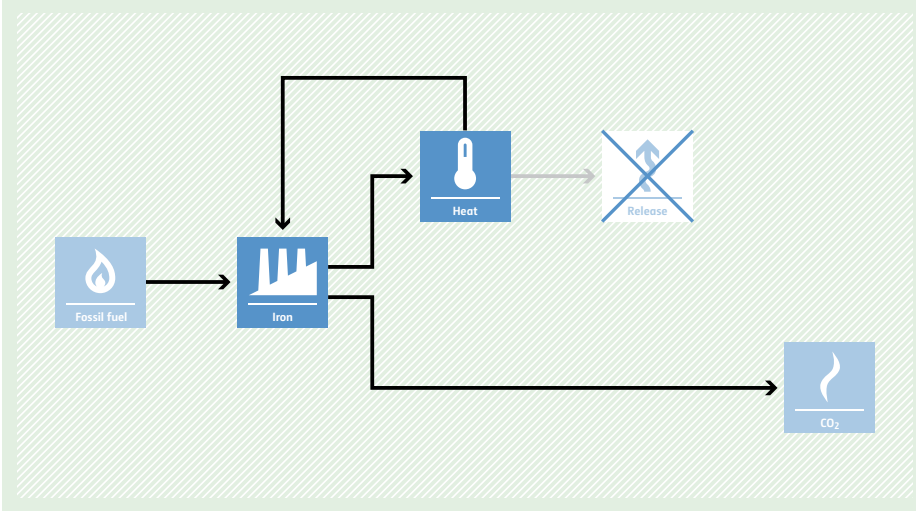
AM0064 Capture and utilisation or destruction of mine methane (excluding coal mines) or non mine methane

<p>Typical project(s)</p>	<p>Capture and utilization or destruction of methane from an operating mine, excluding mines where coal is extracted; capture and utilization or destruction of methane released from geological structures, e.g. methane released directly from holes drilled in geological formations specifically for mineral exploration and prospecting activities.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG destruction. <p>Avoidance of GHG emissions from underground, hard rock, precious and base metal mines.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • In case the project is capture and utilization or destruction of methane from an operating mine, the captured methane is utilized to produce electricity, motive power and/or thermal energy and/or destroyed through flaring. Prior to the start of the project all methane was released into the atmosphere or partially used for heat generation; • In case the project is capture and utilization or destruction of methane released from geological structures, abandoned or decommissioned mines, as well as open cast mines are excluded. Coal extraction mines or oil shale, as well as boreholes or wells opened for gas/oil exploration or extraction do not qualify; • Maximum outside diameter of the boreholes should not exceed 134 mm.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Concentration of methane in extracted gas; • Quantity of methane sent to power plant, boiler and gas grid for end users; • Quantity of electricity and heat generated by the project.
<p>BASELINE SCENARIO Methane is emitted from operating mines and geological structures into the atmosphere.</p>	 <p>The baseline scenario flowchart shows a linear process: 'Mining' (represented by a mine icon) leads to 'CH₄' (represented by a flame icon), which then leads to 'Release' (represented by an upward arrow icon), and finally to 'CH₄' (represented by a flame icon) being emitted into the atmosphere.</p>
<p>PROJECT SCENARIO Methane is captured and destroyed or utilized for energy generation.</p>	 <p>The project scenario flowchart shows 'Mining' leading to 'CH₄'. From 'CH₄', the flow splits into two paths. The top path goes to a box containing 'Flaring' (flame icon) and 'Energy' (e icon), which then leads to 'CO₂' (flame icon). The bottom path goes to a crossed-out 'Release' icon, which then leads to a crossed-out 'CH₄' icon, indicating that methane release is avoided.</p>

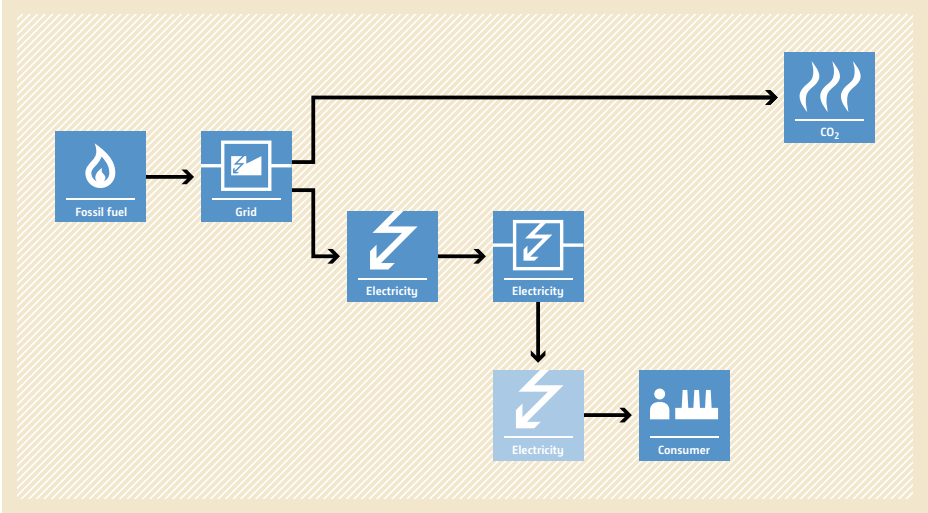
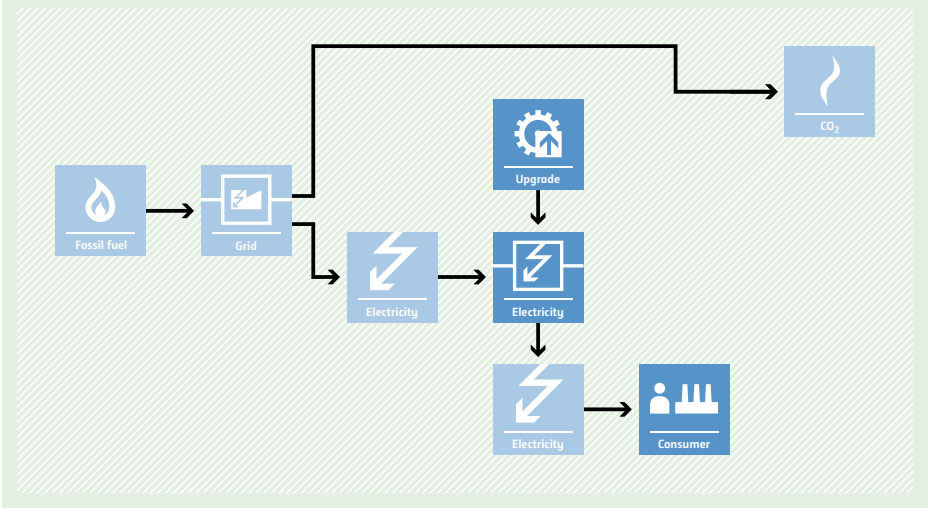
AM0065 Replacement of SF₆ with alternate cover gas in the magnesium industry

<p>Typical project(s)</p>	<p>Full or partial replacement of the use of cover gas SF₆, an inert gas used to avoid oxidation of molten magnesium in casting and alloying processes, by alternate cover gas (HFC134a, Perfluoro-2-methyl-3-pentanone (CF₃CF₂C(O)CF(CF₃)₂) or SO₂ using lean SO₂ technology), in existing facilities of magnesium metal cast industry.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG emission avoidance. <p>Avoidance of SF₆ emissions by the use of alternate cover gas.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Project of SF₆ replacement can be implemented in all segments of the magnesium metal cast industry, as defined in the methodology; • The magnesium metal cast facility has an operating history of at least three years prior to the project implementation; • If SO₂ is used as cover gas in the project, only “dilute SO₂” technology is used that meets the specifications provided in methodology; • Local regulations in the host country regarding SO₂ emissions in the exhausting system should be complied with. If such regulations are not in place, the values of SO₂ emissions given in the methodology should be complied with.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Amount of magnesium manufactured in the most recent three years; • SF₆ consumption in the magnesium cast facility in the most recent three years prior to the project implementation. <p>Monitored:</p> <ul style="list-style-type: none"> • Amount of magnesium manufactured in the project; • Consumption of alternate cover gas in the project; • Consumption of SF₆ or CO₂ in the project, if any.
<p>BASELINE SCENARIO SF₆ continues to be used as cover gas in magnesium metal cast industry, leading to its emission from the processes.</p>	<p>The diagram illustrates the baseline scenario where SF₆ is used as a cover gas. It shows a linear process flow: SF₆ (represented by a molecule icon) is used in a Magnesium (factory icon) production process. This leads to SF₆ (factory icon) being released, which then results in SF₆ emissions (flame icon).</p>
<p>PROJECT SCENARIO SF₆ is replaced with alternate cover gas, resulting in avoidance of SF₆ emissions.</p>	<p>The diagram illustrates the project scenario where SF₆ is replaced by an alternate cover gas. It shows a linear process flow: an Alternative (molecule icon) and SF₆ (crossed-out molecule icon) are used in a Magnesium (factory icon) production process. This leads to GHG emissions (flame icon) and SF₆ (crossed-out factory icon) being released, which then results in SF₆ emissions (crossed-out flame icon).</p>

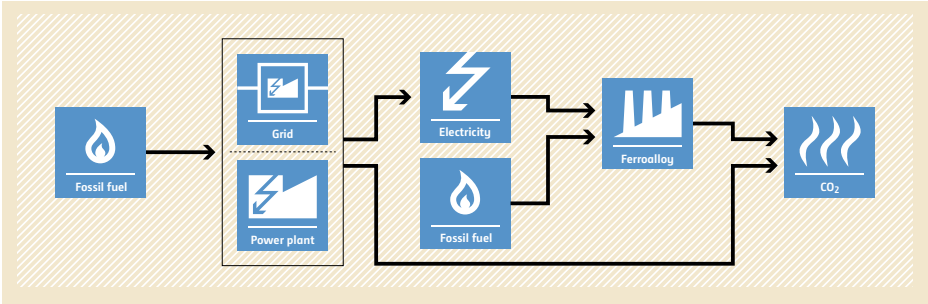
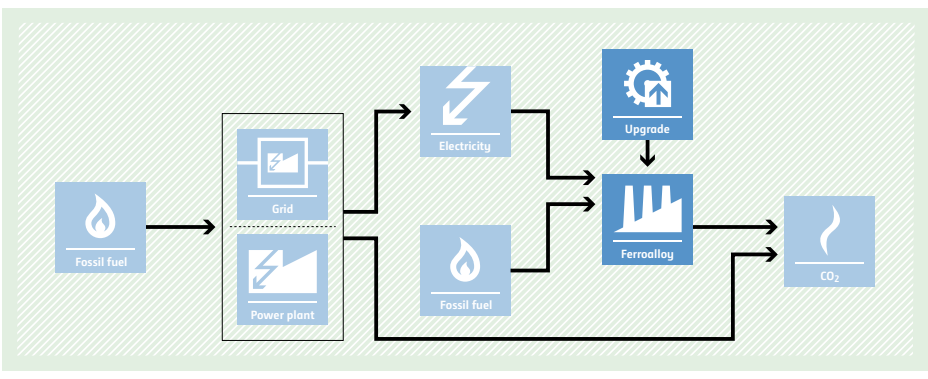
AM0066 GHG emission reductions through waste heat utilisation for pre-heating of raw materials in sponge iron manufacturing process

<p>Typical project(s)</p>	<p>Waste heat released from furnace(s)/kiln(s) is utilized to preheat raw material(s) in an existing or Greenfield sponge iron manufacturing facility.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Energy efficiency improvement leading to reduced specific heat consumption.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project is implemented either for an individual furnace/kiln or a group of furnaces/kilns producing the same type of output; • Waste heat to be utilized is generated in the project furnace(s)/kiln(s); • Only solid matter without scrap/product rejects is used as raw material; • In the project, the raw material is fed directly from the preheater to the furnace/kiln. However, the possibility to bypass the preheater equipment remains.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Historical production and fossil fuel consumption.
	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity, chemical composition and physical state (including the percentage of the metallization) of raw materials and final product; • Type and quantities of fossil fuel; • Quantity of thermal and electrical (from the grid and from the captive power plant, respectively) energy consumed.
<p>BASELINE SCENARIO Fossil fuel is fired for the process. The resulting heat from furnace(s)/kiln(s) is not utilized and instead vented.</p>	 <p>The diagram shows a flow from 'Fossil fuel' to 'Iron' (represented by a factory icon). From the 'Iron' process, an arrow points to a 'Heat' icon (thermometer), which then points to a 'Release' icon (upward arrow). A separate arrow from the 'Iron' process points to a 'CO2' icon (wavy lines).</p>
<p>PROJECT SCENARIO Less fossil fuel is fired in the process. The heat from furnace(s)/ kiln(s) is used to preheat raw material(s) before feeding it into the furnace(s)/kiln(s).</p>	 <p>The diagram shows a flow from 'Fossil fuel' to 'Iron' (represented by a factory icon). An arrow from the 'Iron' process loops back to the 'Iron' process, indicating preheating. From the 'Iron' process, an arrow points to a 'Heat' icon (thermometer), which then points to a 'Release' icon (upward arrow) that is crossed out with a blue 'X'. A separate arrow from the 'Iron' process points to a 'CO2' icon (wavy lines).</p>

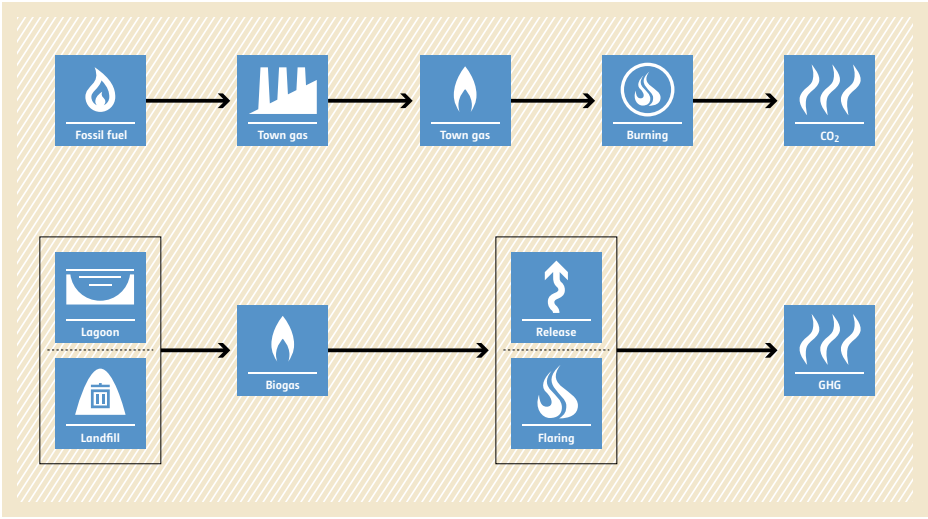
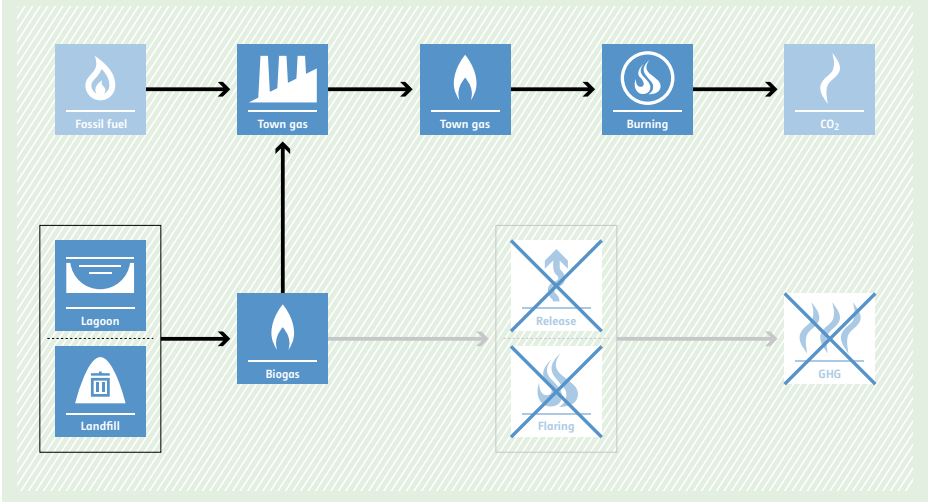
AM0067 Methodology for installation of energy efficient transformers in a power distribution grid

<p>Typical project(s)</p>	<p>Replacement of existing less-efficient transformers with more-efficient transformers in an existing distribution grid or the installation of new high-efficient transformers in new areas that are currently not connected to a distribution grid.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Energy efficiency. <p>Implementation of high-efficient transformers reduces losses in the grid and thereby GHG emissions.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> Emission reductions due to reduction in no-load losses alone are claimed; Load losses, at rated load, of the transformers implemented under the project are demonstrated to be equal or lower than the load losses in transformers that would have been installed in absence of the project; Project proponent implements a scrapping system to ensure that the replaced transformers are not used in other parts of the distribution grid or in another distribution grid.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Average of no-load loss rate provided by the manufacturers of all type of transformers; Grid emission factor (can also be monitored ex post). <p>Monitored:</p> <ul style="list-style-type: none"> Cumulative number of transformers installed by the project as well as related load-loss rates and the black out rate.
<p>BASELINE SCENARIO Less-efficient transformers are installed in existing distribution grids or will be installed in new distribution grids.</p>	 <p>The diagram illustrates the baseline scenario. It starts with 'Fossil fuel' (represented by a flame icon) entering a 'Grid' (represented by a plug icon). From the grid, electricity flows through a series of three 'Electricity' (represented by lightning bolt icons) stages. The grid also has a direct path to a 'CO2' emission (represented by a flame icon). The final 'Electricity' stage feeds into a 'Consumer' (represented by a factory icon).</p>
<p>PROJECT SCENARIO High-efficient transformers are installed in existing distribution grids or will be installed in new distribution grids resulting in lower electricity generation requirements and thereby a reduction of GHG emissions.</p>	 <p>The diagram illustrates the project scenario. It starts with 'Fossil fuel' (represented by a flame icon) entering a 'Grid' (represented by a plug icon). An 'Upgrade' (represented by a gear icon) is applied to the grid. From the upgraded grid, electricity flows through a series of three 'Electricity' (represented by lightning bolt icons) stages. The upgraded grid has a direct path to a smaller 'CO2' emission (represented by a flame icon). The final 'Electricity' stage feeds into a 'Consumer' (represented by a factory icon).</p>

AM0068 Methodology for improved energy efficiency by modifying ferroalloy production facility

<p>Typical project(s)</p>	<p>The project is implemented to improve energy efficiency of an existing ferroalloy production facility. Improvement includes modification of existing submerged electric arc smelting furnace(s) into open slag bath smelting furnace(s) or modification of existing co-current rotary kilns into counter-current rotary kilns.</p> <p>The existing facility is limited to the submerged electric arc smelting furnace(s) and rotary kilns producing only one type of ferroalloy, as defined by the composition of its ingredients.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. • Switch to more-efficient technology.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project includes at least the modification of “submerged bath electric furnaces” to “open slag bath melting furnaces” and can also include a modification of “co-current rotary kilns” to “counter-current rotary kilns”; • Only one type of ferroalloy is produced at the facility and its type and quality is not affected by the project and remains unchanged throughout the crediting period; • Data for at least the three years preceding the implementation of the project is available to estimate the baseline emissions.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Quantity and quality of ferroalloys produced; • Consumption of electricity and fossil fuels in rotary kilns and smelting furnaces; • Grid emission factor (can also be monitored ex post). <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity and quality of ferroalloy produced; • Consumption of electricity and fossil fuels in rotary kilns and smelting furnaces; • Non energy-related carbon streams (quantities and carbon content of reducing agents and its volatiles, ore, slag forming material, non product stream, etc.).
<p>BASELINE SCENARIO Energy (fossil fuel and electricity) is used in a ferroalloy production facility, leading to CO₂ emissions.</p>	 <p>The diagram illustrates the baseline scenario for ferroalloy production. It shows two input streams: 'Fossil fuel' (represented by a flame icon) and 'Electricity' (represented by a lightning bolt icon). The 'Electricity' stream is further divided into two sources: 'Grid' and 'Power plant'. Both 'Fossil fuel' and 'Electricity' streams feed into a central 'Ferroalloy' production process (represented by a factory icon). The output of this process is 'CO₂' emissions (represented by a flame icon with wavy lines).</p>
<p>PROJECT SCENARIO Less energy (fossil fuel and electricity) is used in a ferroalloy production process, leading to lower CO₂ emissions.</p>	 <p>The diagram illustrates the project scenario for ferroalloy production. It shows two input streams: 'Fossil fuel' (represented by a flame icon) and 'Electricity' (represented by a lightning bolt icon). The 'Electricity' stream is further divided into two sources: 'Grid' and 'Power plant'. Both 'Fossil fuel' and 'Electricity' streams feed into an 'Upgrade' step (represented by a gear icon). The output of the 'Upgrade' step feeds into a 'Ferroalloy' production process (represented by a factory icon). The output of this process is 'CO₂' emissions (represented by a flame icon with wavy lines). The overall process is shown to result in lower CO₂ emissions compared to the baseline scenario.</p>

AM0069 Biogenic methane use as feedstock and fuel for town gas production

<p>Typical project(s)</p>	<p>Capture of biogas at a wastewater treatment facility or a landfill and use of the biogas to fully or partially substitute natural gas or other fossil fuels as feedstock and fuel for the production of town gas.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG destruction; • Renewable energy; • Feedstock switch. <p>CH₄ emissions are avoided and fossil fuel is replaced.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • There is no change in the quality of the produced town gas; • Town gas consumer and/ or distribution grid are within the host country boundaries; • Biogas is captured at an existing landfill site or wastewater treatment facility that has at least a three-year record of venting or flaring of biogas. Biogas would continue to be vented or flared in the absence of the project; • Project is implemented in an existing town gas factory that used only fossil fuels, no biogas, for at least three years prior to the start of the project.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity and calorific value of town gas produced; • Quantity and calorific value of the biogas and fossil fuel used as feedstock.
<p>BASILINE SCENARIO Venting or flaring of biogas at the site where it is captured and use of fossil fuel as feedstock for town gas production.</p>	 <p>The baseline scenario flowchart is set against a light brown background. It shows two parallel processes. The top process starts with 'Fossil fuel' (flame icon), leading to 'Town gas' (factory icon), then another 'Town gas' (flame icon), then 'Burning' (flame in a circle icon), and finally 'CO₂' (flame icon). The bottom process starts with 'Lagoon' and 'Landfill' (wastewater and trash icons) leading to 'Biogas' (flame icon). From 'Biogas', an arrow points to a box containing 'Release' (upward arrow icon) and 'Flaring' (flame icon). From this box, an arrow points to 'GHG' (flame icon).</p>
<p>PROJECT SCENARIO Capture of biogas from landfills and/or waste treatment plants and use of it to replace fossil fuel.</p>	 <p>The project scenario flowchart is set against a light green background. It shows the same top process as the baseline: 'Fossil fuel' (flame icon) leads to 'Town gas' (factory icon), then another 'Town gas' (flame icon), then 'Burning' (flame in a circle icon), and finally 'CO₂' (flame icon). The bottom process starts with 'Lagoon' and 'Landfill' (wastewater and trash icons) leading to 'Biogas' (flame icon). An arrow from 'Biogas' points to the 'Town gas' (factory icon) box, indicating it is used as a feedstock. From 'Biogas', a greyed-out arrow points to a greyed-out box containing 'Release' (upward arrow icon) and 'Flaring' (flame icon). A greyed-out arrow also points from this box to a greyed-out 'GHG' (flame icon) box, indicating that these emissions are avoided.</p>

AM0070 Manufacturing of energy efficient domestic refrigerators



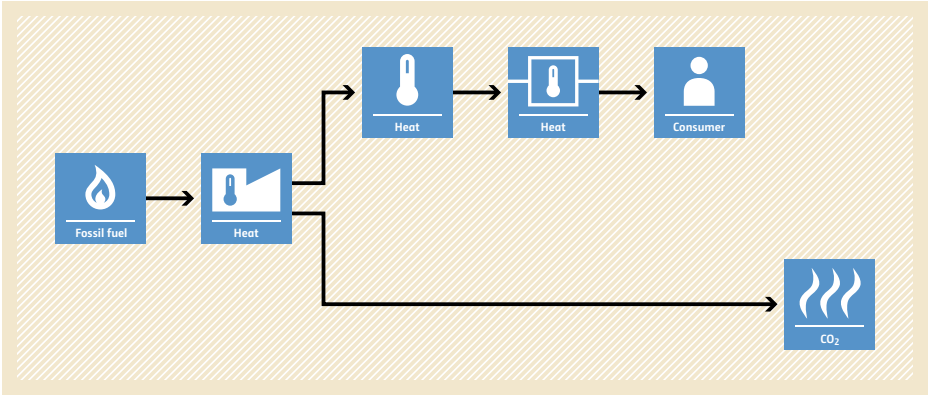
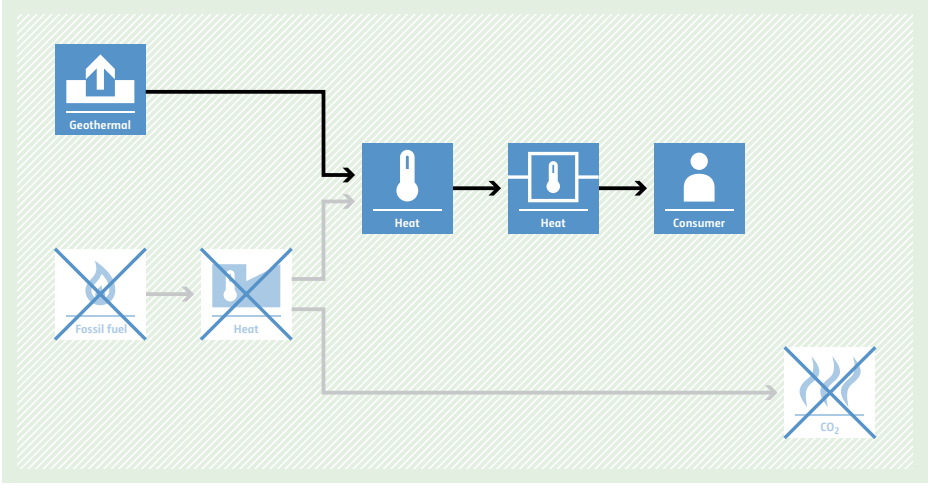
<p>Typical project(s)</p>	<p>Increase in the energy efficiency of manufactured refrigerators.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Increase in energy efficiency to reduce electricity consumed per unit of service provided.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Refrigerators are used by households on a continuous basis; • No increase in the GWP of refrigerants and foam blowing agents used; • No change in the general type of refrigerators; • If a labelling scheme is used to determine the rated electricity consumption of refrigerators, then it must cover 30% of the market share and include the most efficient refrigerators in the host country.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Autonomous improvement ratio; • Information on historical sales (quantity, storage volumes, rated electricity consumption); • Grid emission factor (can also be monitored ex post). <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of refrigerators sold; • Specifications (model, design type and volume class) of refrigerators sold; • Electricity consumption of refrigerators in the monitoring sample group.
<p>BASELINE SCENARIO High electricity consumption by inefficient domestic refrigerators results in high CO₂ emissions from generation of electricity.</p>	<pre> graph LR FF[Fossil fuel] --> G[Grid] G --> E[Electricity] G --> CO2[CO2] E --> R[Refrigerators] </pre>
<p>PROJECT SCENARIO Lower electricity consumption by more-efficient domestic refrigerators results in less CO₂ emissions from generation of electricity.</p>	<pre> graph LR FF[Fossil fuel] --> G[Grid] G --> E[Electricity] G --> CO2[CO2] E --> R[Refrigerators] U[Upgrade] --> R </pre>

AM0071 Manufacturing and servicing of domestic and/or small commercial refrigeration appliances using a low GWP refrigerant

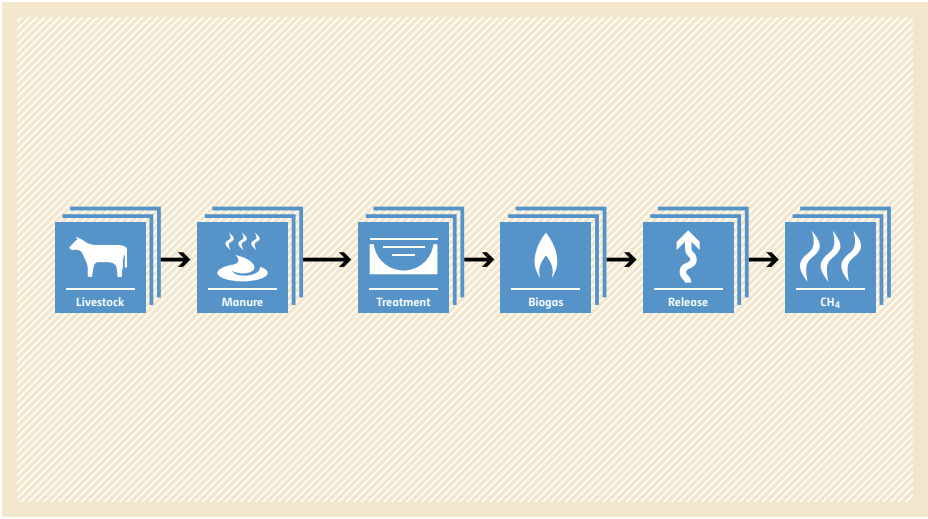
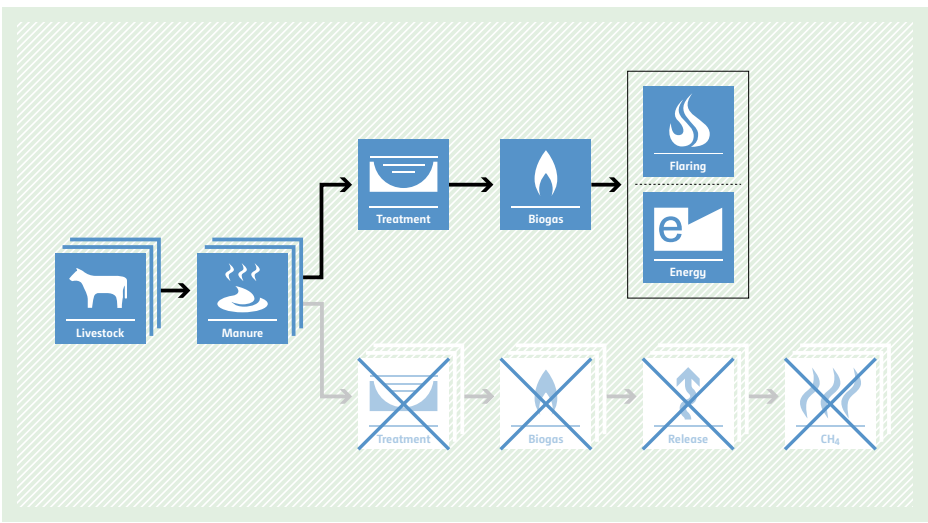


<p>Typical project(s)</p>	<p>Switching from a high GWP to low GWP refrigerant while manufacturing and refilling domestic and/or small commercial refrigeration appliances.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Feedstock switch. <p>Avoidance of GHG emission by switching from high-GWP refrigerant to low-GWP refrigerant.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The manufacturer has been producing refrigeration appliances using HFC-134a for at least three years and has not been using low-GWP refrigerants prior to the start of the project; • Only one low-GWP refrigerant is used in manufacturing and refilling of refrigeration appliances; • The project does not lead to a decrease in energy efficiency; • Imported refrigeration appliances shall not be included in the project; • Less than 50% of the domestic refrigerant production use low GWP refrigerants.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Historical production of refrigerators sold in host country with initial charge. <p>Monitored:</p> <ul style="list-style-type: none"> • Initial refrigerant charge in the project and its distribution losses; • Quantities and models of appliances manufactured and exported; • Number of reject units of refrigeration appliance model; • Failure rate involving refrigerant recharge.
<p>BASELINE SCENARIO Production of refrigeration appliances with high-GWP refrigerant.</p>	<pre> graph LR A[HFC Refrigerant] --> B[Refrigerators] B --> C[Refrigerators] C --> D[HFC] C --> E[HFC] </pre>
<p>PROJECT SCENARIO Production of refrigeration appliances with low-GWP refrigerant.</p>	<pre> graph LR A1[HFC Refrigerant] --> B[Refrigerators] A2[Refrigerant] --> B B --> C1[Refrigerators] B --> C2[Refrigerators] C1 --> D1[HFC] C1 --> D2[GHG] C2 --> D3[HFC] C2 --> D4[GHG] style A1 stroke-dasharray: 5 5 style C1 stroke-dasharray: 5 5 style D1 stroke-dasharray: 5 5 style D3 stroke-dasharray: 5 5 </pre>

AM0072 Fossil fuel displacement by geothermal resources for space heating

<p>Typical project(s)</p>	<p>Introduction of a centralized geothermal heat supply system for space heating in buildings. The geothermal heat supply system can be a new system in new buildings, the replacement of existing fossil fuel systems or the addition of extra geothermal wells to an existing system.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy. <p>Displacement of more-GHG-intensive thermal energy generation.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Use geothermal resources for centralized space-heating system in residential, commercial and/or industrial areas; • Use of GHG-emitting refrigerants is not permitted; • The heat drawn from the geothermal water replaces, partially or completely, the use of fossil fuel in the baseline situation whereas a maximum increase of the previous capacity of 10% is eligible (otherwise a new baseline scenario has to be developed).
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • If applicable: three years of historical data for fossil fuel system, e.g. average thermal energy output or fuel consumption. <hr/> <p>Monitored:</p> <ul style="list-style-type: none"> • Temperature difference between inlet and outlet temperatures as well as flow rate at the downstream of the geothermal heat exchanger and the net heating area of the buildings included in the project boundary; • Geothermal non-condensable gas (CO₂ and CH₄) produced after the implementation of the project.
<p>BASELINE SCENARIO Fossil fuel is used as energy source for space heating</p>	 <p>The diagram illustrates the baseline scenario. It starts with a 'Fossil fuel' icon (flame) leading to a 'Heat' icon (thermometer). From this 'Heat' icon, two arrows branch out: one goes to a 'Heat' icon (thermometer) which then leads to a 'Consumer' icon (person), and the other goes directly to a 'CO₂' icon (flame with wavy lines).</p>
<p>PROJECT SCENARIO Installation of a new geothermal system in new building(s), replacement of existing fossil fuel heating systems or expansion of capacity of an existing geothermal system instead of using fossil fuel.</p>	 <p>The diagram illustrates the project scenario. It starts with a 'Geothermal' icon (house with upward arrow) leading to a 'Heat' icon (thermometer). From this 'Heat' icon, two arrows branch out: one goes to a 'Heat' icon (thermometer) which then leads to a 'Consumer' icon (person), and the other goes to a 'CO₂' icon (flame with wavy lines). The 'Fossil fuel' and 'Heat' icons from the baseline scenario are shown with a large 'X' over them, indicating they are no longer used.</p>

AM0073 GHG emission reductions through multi-site manure collection and treatment in a central plant

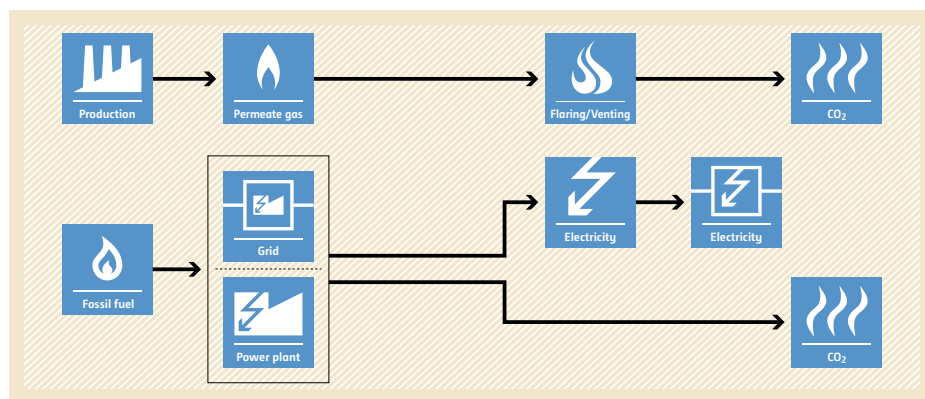
<p>Typical project(s)</p>	<p>Manure is collected by tank trucks, canalized and/or pumped from multiple livestock farms and then treated in a single central treatment plant.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG destruction. • Release of CH₄ emissions is avoided by combustion of methane.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Livestock farm populations are managed under confined conditions; • Manure is not discharged into natural water resources (e.g. rivers or estuaries); • Animal residues are treated under anaerobic conditions in the baseline situation (conditions for this treatment process are specified); • If treated residue is used as fertilizer in the baseline, then this end use continues under the project; • Sludge produced during the project is stabilized through thermal drying or composting, prior to its final disposition/application.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Volume, volatile solids and total nitrogen of the effluent and residues being treated or produced at the central treatment plant; • Auxiliary energy used to run project treatment steps; • Electricity or heat generated by the use of biogas.
<p>BASILINE SCENARIO Anaerobic manure treatment systems without methane recovery result in CH₄ emissions.</p>	 <p>The diagram illustrates the baseline scenario as a linear sequence of six steps: Livestock (represented by a cow icon), Manure (represented by a pile of manure with steam), Treatment (represented by a tank with a curved surface), Biogas (represented by a flame icon), Release (represented by a cloud with an upward arrow), and CH₄ (represented by a flame icon). Arrows connect each step in sequence from left to right.</p>
<p>PROJECT SCENARIO Manure from farms is collected and processes in a central treatment plant. Methane is captured and flared or used. In case of energetic use of biogas, displacement of more-GHG-intensive energy generation.</p>	 <p>The diagram illustrates the project scenario. It starts with Livestock and Manure, which lead to Treatment. From Treatment, Biogas is produced. This Biogas is then used for either Flaring (represented by a flame icon) or Energy (represented by a flame icon and a letter 'e' in a square). The subsequent steps in the baseline scenario—Release and CH₄—are shown as faded and crossed out with a large 'X', indicating they are avoided in the project scenario.</p>

AM0074 New grid connected power plants using permeate gas previously flared and/or vented

<p>Typical project(s)</p>	<p>Construction and operation of a power plant that supplies electricity to the grid and uses permeate gas, low heating value off-gas resultant from the processing of natural gas, as fuel to operate the power plant.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Low carbon electricity. • Displacement of electricity that would be provided by more-carbon-intensive means.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The total amount of permeate gas from the gas processing facility was flared and/or vented for at least three years prior to the start of the project; • The transportation of the permeate gas from the natural gas processing facility to the new power plant occurs through a dedicated pipeline that is established as part of the project and not used for the transportation of any other gases; • All power produced by the project power plant is exported to the grid.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Fugitive CH₄ emission factor of all relevant equipment types used to transport the permeate gas; • Low heating value of permeate gas; • Annual average quantity of permeate gas flared and/or vented in three years prior to the start of the project activity. <p>Monitored:</p> <ul style="list-style-type: none"> • Electricity supplied to the grid by the project power plant; • Average mass fraction of methane in the permeate gas; • Operation time of equipment used to transport the permeate gas; • Baseline emission factor for project electricity system; • Quantity of permeate gas used for electricity generation.

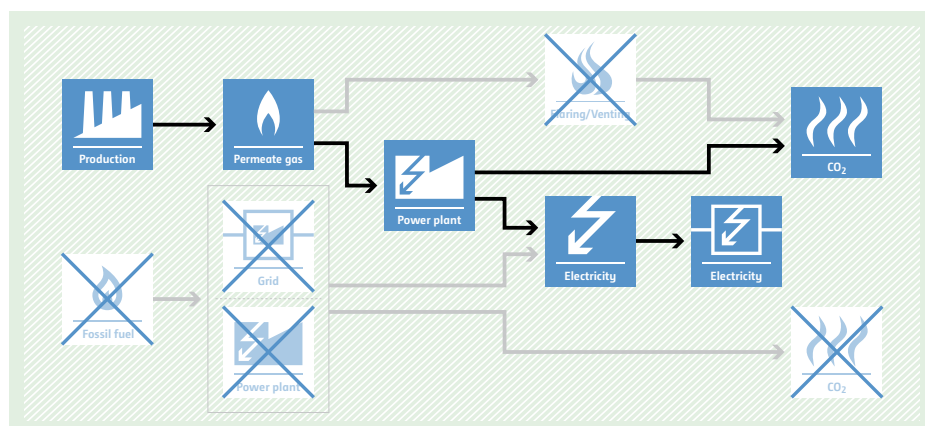
BASELINE SCENARIO

Permeate gas is flared and/or vented. Electricity is generated using processed natural gas or other energy sources than permeate gas, or electricity is provided by the grid.

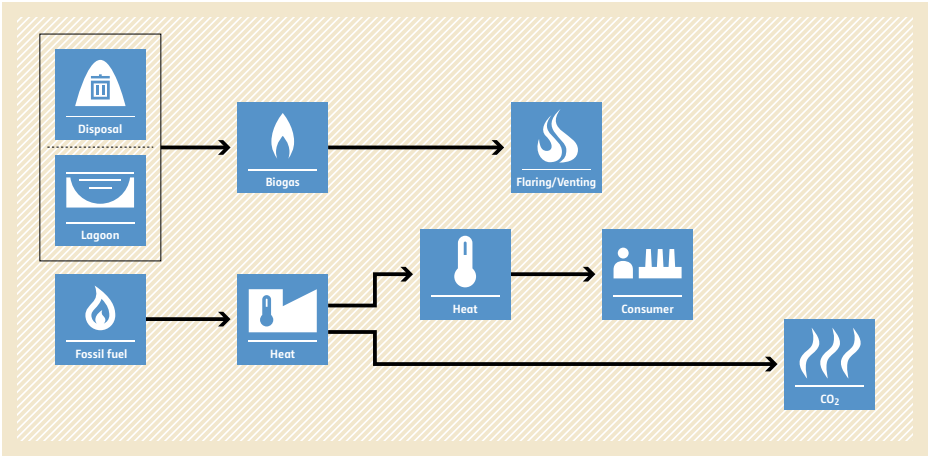
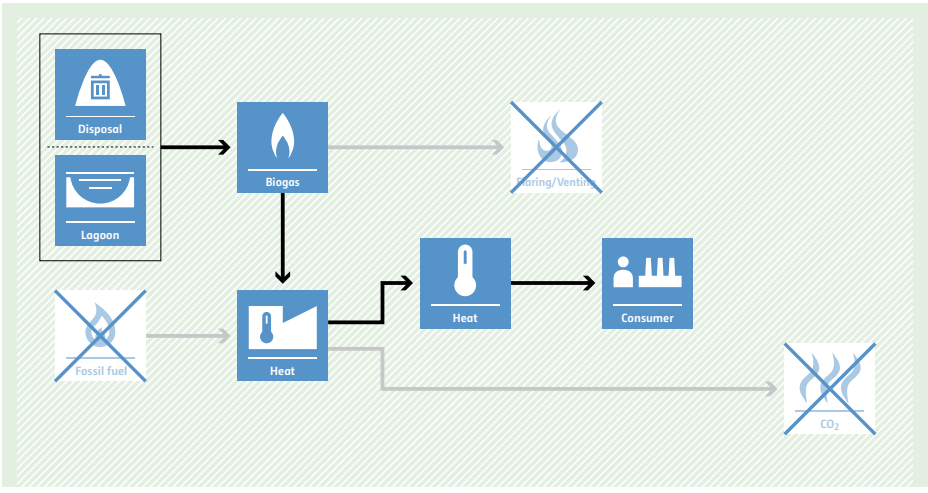


PROJECT SCENARIO

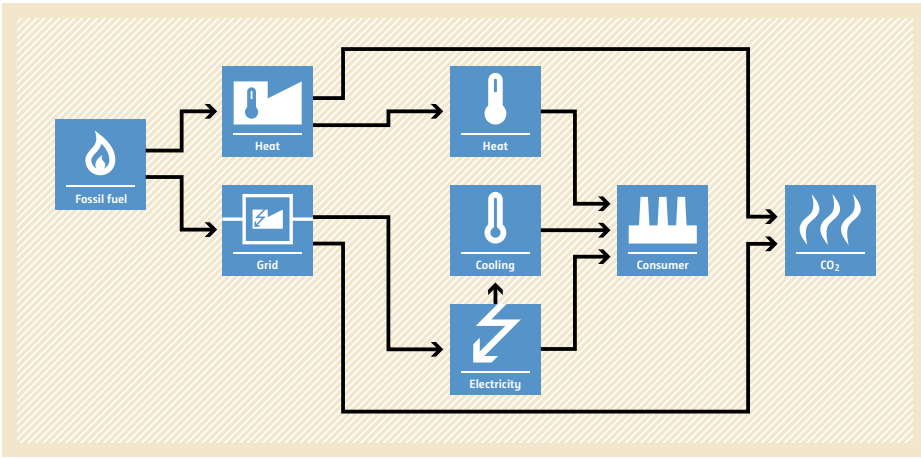
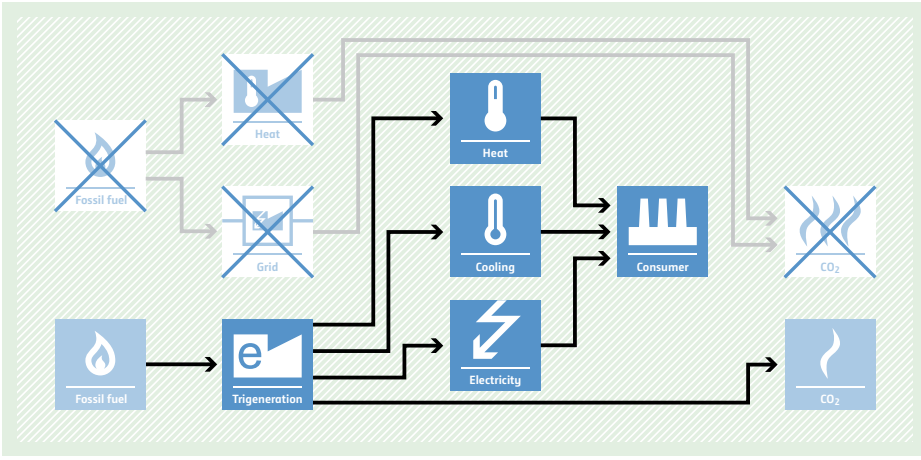
Permeate gas, previously flared and/or vented at the existing natural gas processing facility, is used as fuel in a new grid-connected power plant.



AM0075 Methodology for collection, processing and supply of biogas to end-users for production of heat

<p>Typical project(s)</p>	<p>Processing and upgrading the biogas collected from biogas producing site(s) in a new biogas processing facility and supplying it to existing end-user(s) to produce heat in heat generation equipments for on-site use.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG destruction; • Renewable energy. <p>Switching from more-carbon-intensive fuel to biogas that was previously flared or vented.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The biogas is obtained from one or several existing biogas producing site(s) that have to be identified ex ante; • The biogas was either vented or flared prior to implementation of the project; • All heat generation equipments included in the project have to be identified ex ante, and it has to be demonstrated that these were using only fossil fuel prior to implementation of the project; • Any transportation of biogas or processed biogas occurs only through dedicated pipelines or by road vehicles.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Amount and net calorific value of processed biogas supplied to the boiler or heat generation equipment(s); • Amount of the steam or heat produced in the boiler or heat generation equipment(s); • Amount and net calorific value of fossil fuel used in the boiler or heat generation equipment.
<p>BASELINE SCENARIO Use of fossil fuel in heat generation equipments and biogas is flared or vented.</p>	 <p>The diagram illustrates the baseline scenario. It shows a process flow starting from 'Disposal' and 'Lagoon' leading to 'Biogas'. 'Biogas' can go to 'Flaring/Venting' or 'Heat'. 'Fossil fuel' also goes to 'Heat'. The 'Heat' from both sources goes to a 'Consumer' and then to 'CO2' emissions.</p>
<p>PROJECT SCENARIO Upgraded biogas burned in the heat generation equipments avoiding the use of fossil fuel.</p>	 <p>The diagram illustrates the project scenario. It shows a process flow starting from 'Disposal' and 'Lagoon' leading to 'Biogas'. 'Biogas' goes to 'Heat'. 'Fossil fuel' is crossed out with a red X. The 'Heat' goes to a 'Consumer' and then to 'CO2' emissions, which are also crossed out with a red X.</p>

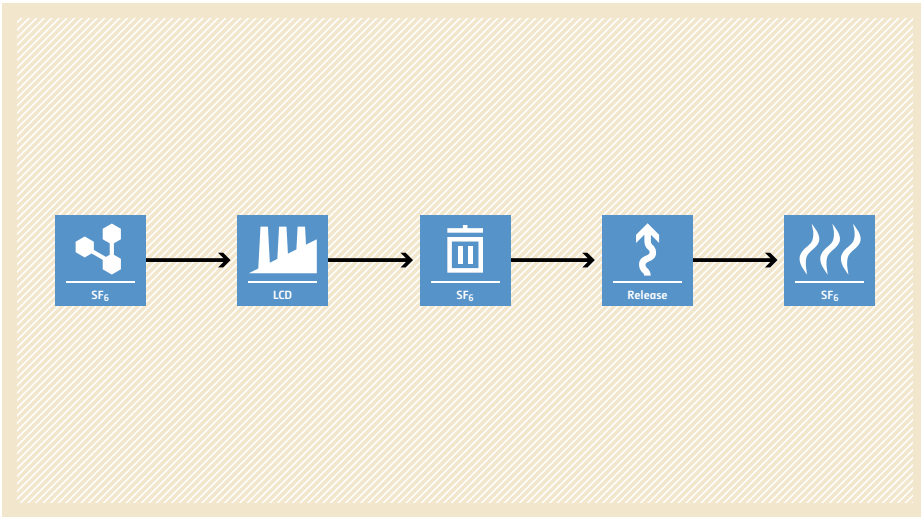
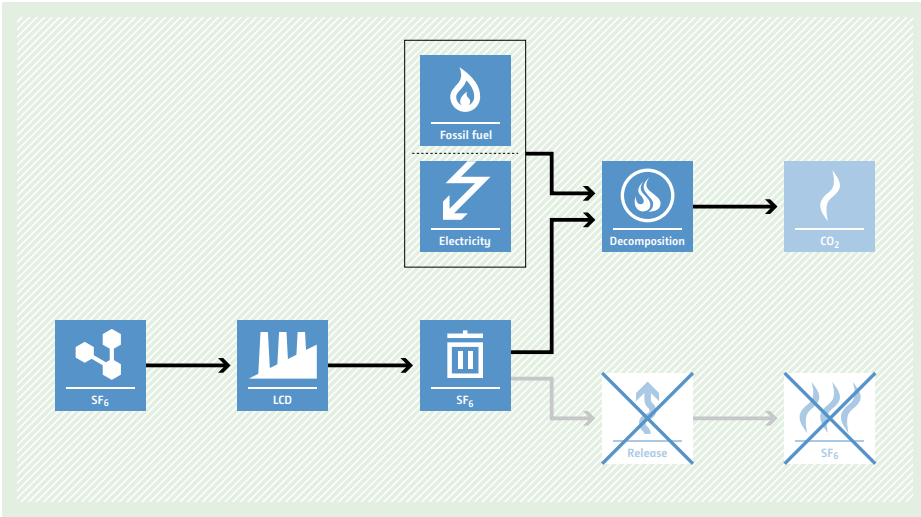
AM0076 Implementation of fossil fuel trigeneration systems in existing industrial facilities

<p>Typical project(s)</p>	<p>Installation of an on-site fossil-fuel-based trigeneration plant to supply electricity, steam and chilled water to an industrial facility.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Displacement of electricity, heat and cooling that would be provided by more-carbon-intensive means.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The baseline is the separate supply of electricity from the grid, heat supplied by an on-site fossil fuel fired boiler and chilled water from on-site electrical compression chillers; • There have been no cogeneration (CHP) or trigeneration (CCHP) systems operating in the industrial facility prior to the project; • No steam or chilled water is exported in the project; • Chillers in the project are heat driven (absorption chillers).
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Output efficiency of the baseline boiler; • Power consumption function of the baseline chiller. <hr/> <p>Monitored:</p> <ul style="list-style-type: none"> • Electricity produced/purchased/sold by the trigeneration plant; • Quantity of fuels used in the trigeneration plant; • Quantity, temperature and pressure of steam produced by the trigeneration plant; • Quantity and temperature of chilled water produced by the trigeneration plant.
<p>BASELINE SCENARIO Separate supply of electricity from the grid, chilled water using grid electricity and steam by a fossil-fuel-fired boiler.</p>	 <p>The diagram illustrates the baseline scenario. On the left, 'Fossil fuel' (flame icon) feeds into a 'Heat' box (thermometer icon). 'Grid' (power plug icon) feeds into a 'Cooling' box (thermometer icon) and an 'Electricity' box (lightning bolt icon). The 'Heat' box also feeds into the 'Cooling' box. Both 'Heat' and 'Cooling' boxes feed into a 'Consumer' box (factory icon). The 'Electricity' box also feeds into the 'Consumer' box. Finally, the 'Consumer' box feeds into a 'CO2' box (flame icon).</p>
<p>PROJECT SCENARIO A fossil fuel-fired trigeneration plant generates directly at the industrial facility electricity, steam and chilled water resulting in overall lower CO₂ emissions.</p>	 <p>The diagram illustrates the project scenario. On the left, 'Fossil fuel' (flame icon) feeds into a 'Trigeneration' box (lightning bolt icon with 'e'). The 'Trigeneration' box feeds into three boxes: 'Heat' (thermometer icon), 'Cooling' (thermometer icon), and 'Electricity' (lightning bolt icon). The 'Heat' and 'Cooling' boxes feed into a 'Consumer' box (factory icon). The 'Electricity' box also feeds into the 'Consumer' box. Finally, the 'Consumer' box feeds into a 'CO2' box (flame icon). The 'Fossil fuel', 'Grid', and 'Cooling' boxes from the baseline scenario are crossed out with a large 'X'.</p>

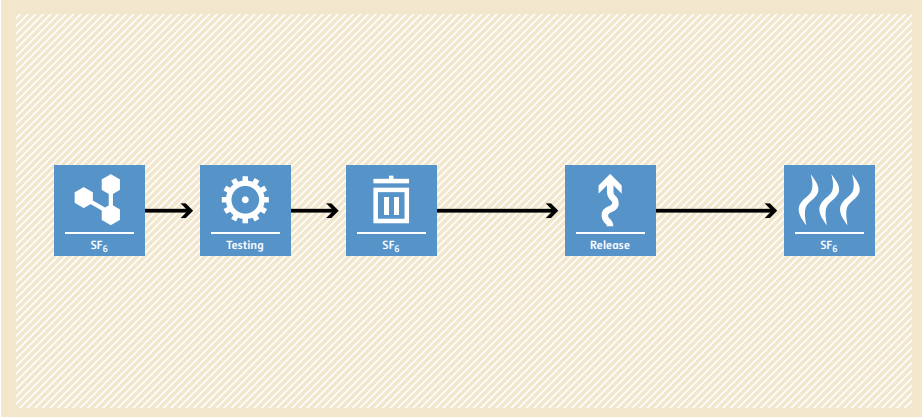
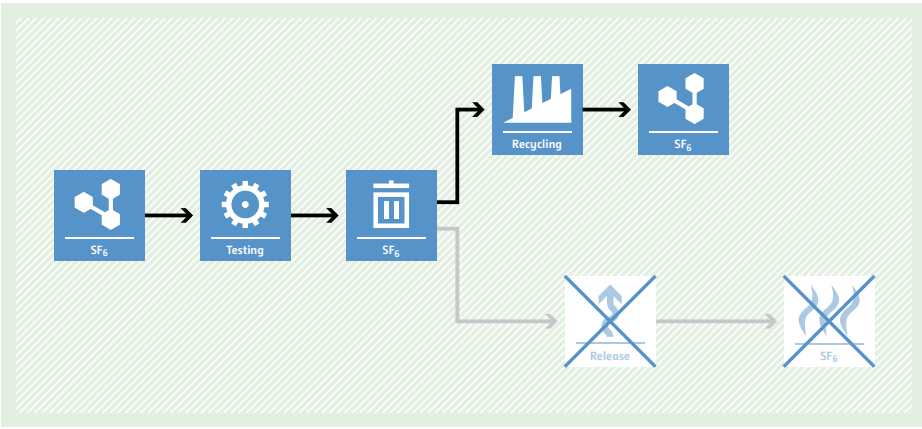
AM0077 Recovery of gas from oil wells that would otherwise be vented or flared and its delivery to specific end-users

<p>Typical project(s)</p>	<p>Associated gas from oil wells that was previously flared or vented, is recovered and processed in a new gas processing plant along with, optionally, non-associated gas. The processed gas is delivered to clearly identifiable specific end-user(s) by means of CNG mobile units and/or delivered into an existing natural gas pipeline.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Fuel switch. <p>Recovery of associated gas from oil wells that would otherwise be flared or vented for displacement of non-associated gas in a new gas processing plant.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The recovered gas comes from oil wells that are in operation and producing oil at the time. Records of flaring or venting of the associated gas are available for at least three years; • The processed gas is consumed in the host country(ies) only; • If the project oil wells include gas-lift systems, the gas-lift gas has to be associated gas from the oil wells within the project boundary; • The natural gas can be used only in heat generating equipment.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity and carbon content of gas measured at various points, i.e. recovered associated gas, non-associated gas from natural gas wells, gas or other fossil fuel consumed on site, gas delivered to end-user(s), gas delivered to natural gas pipeline; • If applicable: quantity and net calorific value of fuel consumed in vehicles for transportation of CNG.
<p>BASELINE SCENARIO Associated gas from oil wells is flared or vented and end users meet their energy demand using other fossil fuel.</p>	
<p>PROJECT SCENARIO Associated gas from oil wells is recovered instead of flared or vented and displaces the use of other fossil fuel by the end-users.</p>	

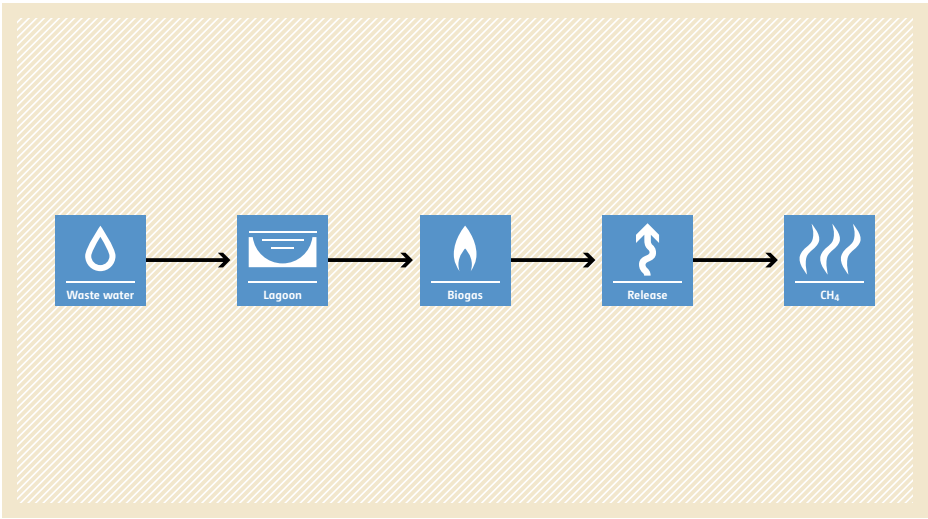
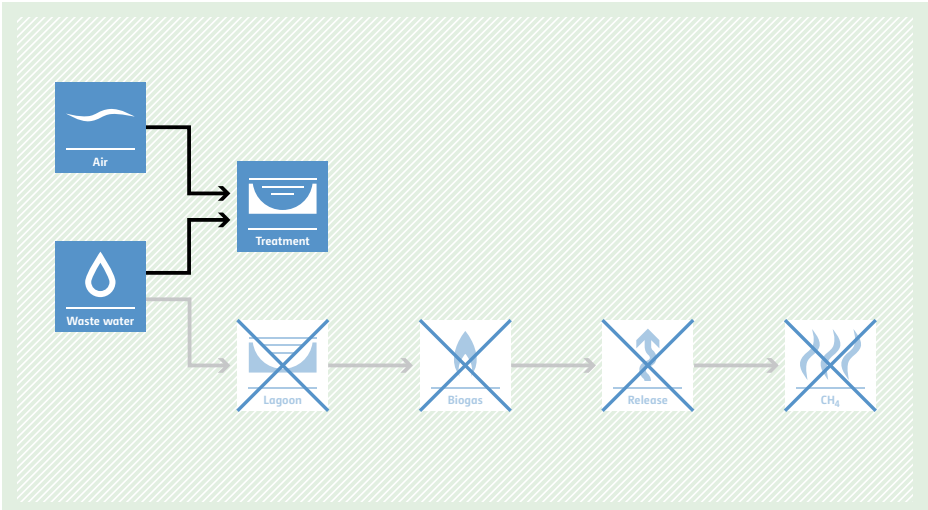
AM0078 Point of use abatement device to reduce SF₆ emissions in LCD manufacturing operations

<p>Typical project(s)</p>	<p>Installation of a combustion or thermal abatement device to destroy SF₆ emissions from an LCD etching plant.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG destruction. <p>Combustion or thermal destruction of SF₆ emissions.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Production lines with at least three years of information about SF₆ purchase and consumption and production of LCD substrate by 31. January, 2009; • There is no local law or regulation that mandates decomposition, destruction, recycling or substitution of SF₆ or any component of exhaust gases containing SF₆; • The SF₆ destruction should occur at the same industrial site where SF₆ is used, and the SF₆ destroyed is not imported from other facilities.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • SF₆ consumption in the most recent three years; • Production of LCD substrate in the most recent three years. <p>Monitored:</p> <ul style="list-style-type: none"> • Mass of SF₆ gas entering and existing the abatement device; • SF₆ consumption in the project; • Production of LCD substrate; • Electricity and/or fuel consumption for the operation of the abatement device.
<p>BASELINE SCENARIO SF₆ is released to the atmosphere after being used in the etching of LCD units.</p>	 <p>The baseline scenario flowchart shows a linear process: SF₆ gas is used in LCD manufacturing, then released to the atmosphere. The icons represent SF₆ (hexagonal molecule), LCD (factory), SF₆ (hexagonal molecule), Release (upward arrow), and SF₆ (flame).</p>
<p>PROJECT SCENARIO SF₆ is recovered and destroyed in an abatement unit located after the etching unit.</p>	 <p>The project scenario flowchart shows SF₆ gas used in LCD manufacturing, then entering an abatement unit. The abatement unit uses fossil fuel and electricity for decomposition, resulting in CO₂ emissions. The original 'Release' and 'SF₆' (flame) steps are crossed out with blue 'X' marks, indicating they are avoided.</p>

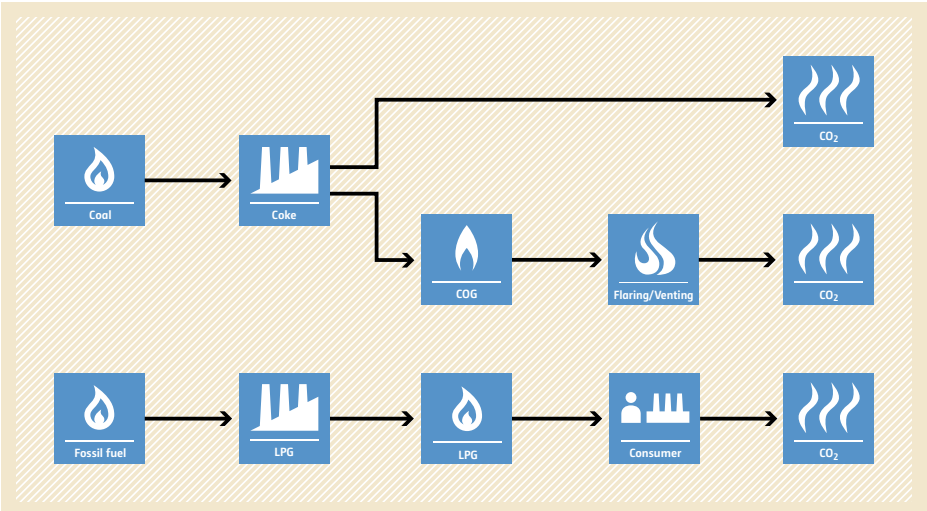
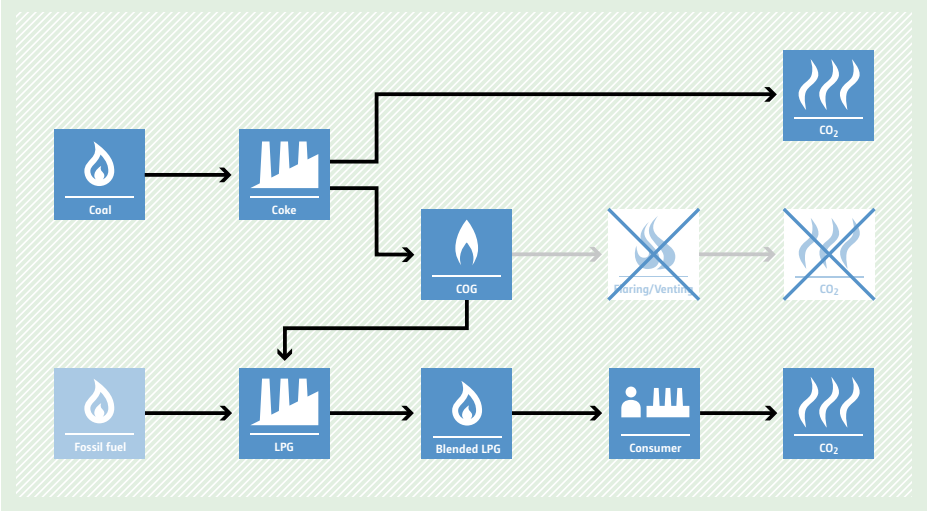
AM0079 Recovery of SF₆ from gas insulated electrical equipment in testing facilities

<p>Typical project(s)</p>	<p>Installation of a recovery system for used SF₆ gas that would be vented after the testing of gas-insulated electrical equipment at a testing facility, and then reclamation of the recovered SF₆ gas at an SF₆ production facility.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG formation avoidance. <p>Avoidance of SF₆ emissions by recovery and reclamation of the SF₆ emissions.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The SF₆ recovery site uses SF₆ in the testing of gas-insulated electrical equipment, which are performed as part of a rating process, or during development or production of new electrical equipment; • The recovered gas is reclaimed by using it as a feedstock in the production of new SF₆ on the premises of an existing SF₆ production facility; • The testing considered for the project is electrical tests of medium and high voltage rated equipment (>1 kV); • Before the project implementation, SF₆ gas used in the equipment for the tests is vented after testing.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Mass of SF₆ that is vented during testing for at least one year of historical data; • Concentration of SF₆ in a recovery cylinder for at least one year of historical data. <hr/> <p>Monitored:</p> <ul style="list-style-type: none"> • Mass of SF₆ that is filled into each gas-insulated electrical equipment; • Mass of SF₆ recovered at the recovery site and used as feedstock at the reclamation site; • Concentration of SF₆ in a recovery cylinder.
<p>BASELINE SCENARIO SF₆ is released to the atmosphere after the completion of the test of a gas-insulated electrical equipment.</p>	 <p>The diagram illustrates the baseline scenario. It starts with a box labeled 'SF₆' containing a molecular structure icon. An arrow points to a 'Testing' box with a gear icon. Another arrow points to an 'SF₆' box with a storage tank icon. A final arrow points to a 'Release' box with an upward arrow icon, which then leads to an 'SF₆' box with a flame icon, representing atmospheric release.</p>
<p>PROJECT SCENARIO SF₆ used during the test is recovered and transported to a reclamation facility where the recovered gas will be re-injected in the stream to produce new SF₆.</p>	 <p>The diagram illustrates the project scenario. It starts with a box labeled 'SF₆' containing a molecular structure icon. An arrow points to a 'Testing' box with a gear icon. Another arrow points to an 'SF₆' box with a storage tank icon. From this point, the path splits: one arrow goes to a 'Recycling' box with a factory icon, which then leads to a new 'SF₆' box with a molecular structure icon. The other arrow from the 'SF₆' storage tank box goes to a 'Release' box with a crossed-out upward arrow icon, which then leads to a crossed-out 'SF₆' box with a flame icon, indicating that release is avoided.</p>

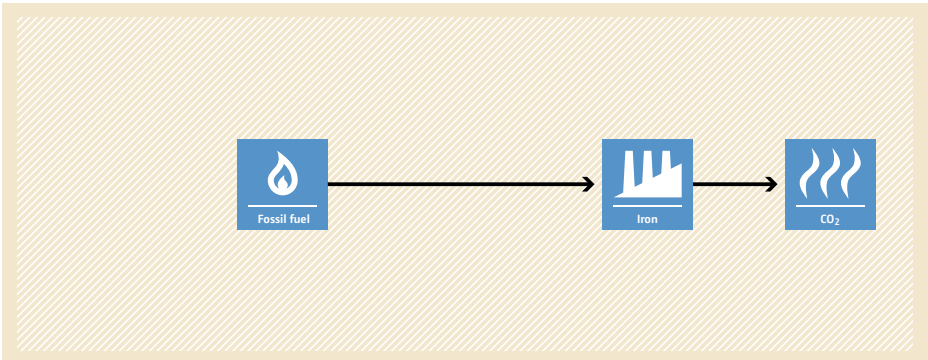
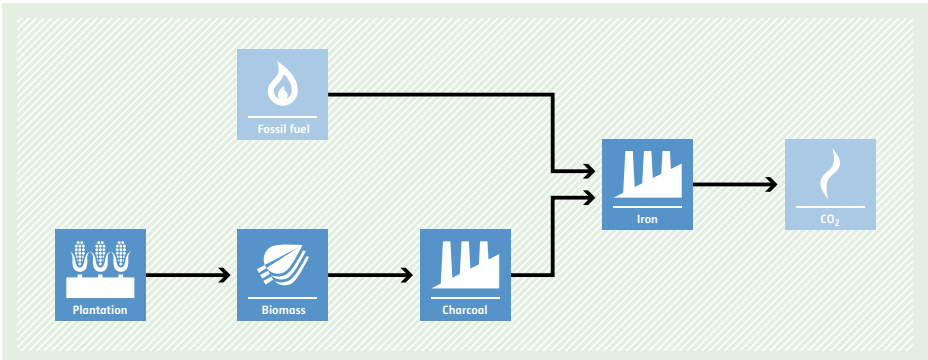
AM0080 Mitigation of greenhouse gases emissions with treatment of wastewater in aerobic wastewater treatment plants

<p>Typical project(s)</p>	<p>Implementing a new aerobic wastewater treatment plant for the treatment of domestic and/or industrial wastewater, with sludge treated either in the same manner as the baseline, or in a new anaerobic digester with biogas capture. The biogas is either flared and/or used to generate electricity and/or heat.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG emission avoidance. <p>Avoidance of CH₄ emissions from wastewater treatment.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project either replaces an existing anaerobic open lagoon system, with or without conversion of the sludge treatment system, or is an alternative to a new to be built anaerobic open lagoon system; • Loading in the wastewater streams has to be high enough to ensure that algal oxygen production can be ruled out in the baseline; • The average depth of the existing or new to be built anaerobic open lagoons system is at least one metre and residence time of the organic matter is at least 30 days.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity and average chemical oxygen demand of the wastewater that is treated; • Electricity and heat generated with biogas from the new anaerobic digester, if applicable; • Quantity of produced sludge; • Fossil fuel, electricity and transportation needed to operate the project.
<p>BASELINE SCENARIO Wastewater would have been treated in an anaerobic open lagoon system without methane recovery and flaring. Sludge would have been dumped or left to decay, or dried under controlled and aerobic conditions and then disposed to a landfill with methane recovery or used in soil application.</p>	 <p>The diagram illustrates the baseline scenario as a linear flow: Wastewater (represented by a water drop icon) flows into a Lagoon (represented by a lagoon icon), which produces Biogas (represented by a flame icon). The Biogas is then released (represented by an upward arrow icon), leading to CH₄ emissions (represented by a flame icon with wavy lines).</p>
<p>PROJECT SCENARIO Installation of a new aerobic wastewater treatment plant. Sludge is treated either the same way as the baseline or in a new anaerobic digester with the biogas capture.</p>	 <p>The diagram illustrates the project scenario. It shows two input paths: Air (represented by a wavy line icon) and Wastewater (represented by a water drop icon). Both flow into a Treatment plant (represented by a lagoon icon). The baseline path, which would have led to Biogas, Release, and CH₄ emissions, is shown as a greyed-out and crossed-out sequence of icons (Lagoon, Biogas, Release, CH₄).</p>

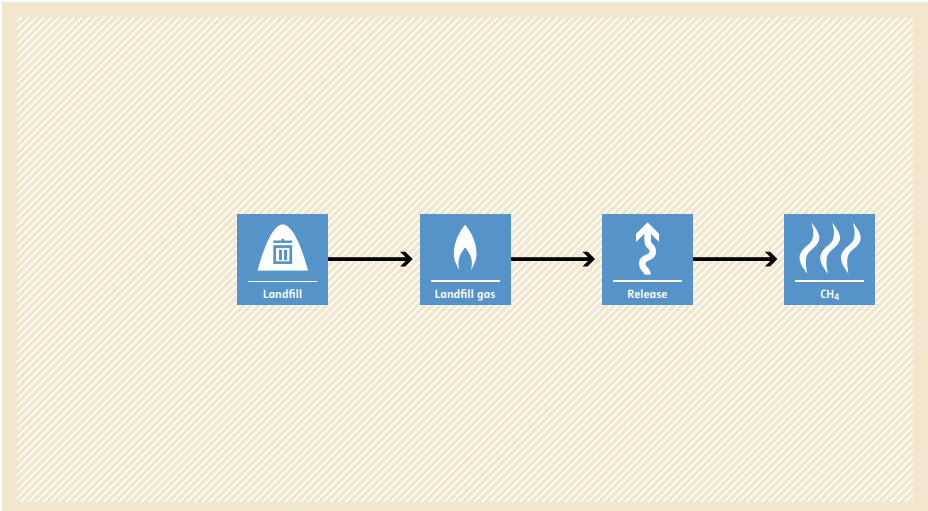
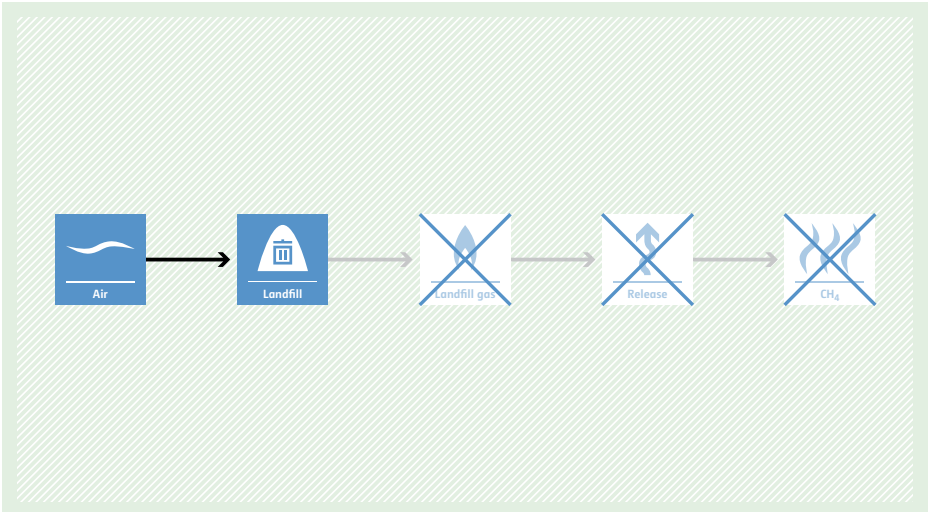
AM0081 Flare or vent reduction at coke plants through the conversion of their waste gas into dimethyl ether for use as a fuel

<p>Typical project(s)</p>	<p>Construction of a new dimethyl ether (DME) facility to utilize a previously vented or flared stream of Coke Oven Gas (COG).</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Fuel switch. <p>Use of a previously vented source of carbon for the production of DME and use of DME for LPG blending.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> The project is a newly built DME plant which will supply DME to LPG processing facilities for blending purposes; The history of the coke plant is the venting or flaring of COG for at least three years; Bituminous coal remains the sole coking coal for the coke plant; COG is the only carbon source used for DME production.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Historical coal consumption and coke production in coke plants. <p>Monitored:</p> <ul style="list-style-type: none"> The type and amount of coal consumed in each coke plant (for process and fuel); The quantity of fossil fuels combusted as a result of the project (i.e. in the operation of the DME production facility or power plant); Electricity consumption in DMR plant.
<p>BASELINE SCENARIO Venting or flaring of COG. Use of unblended LPG fuel resulting in high CO₂ emissions.</p>	
<p>PROJECT SCENARIO Use of all or part of the wasted COG to produce DME. This DME is supplied to LPG processing facilities for blending purpose. Thus, use of LPG is reduced.</p>	

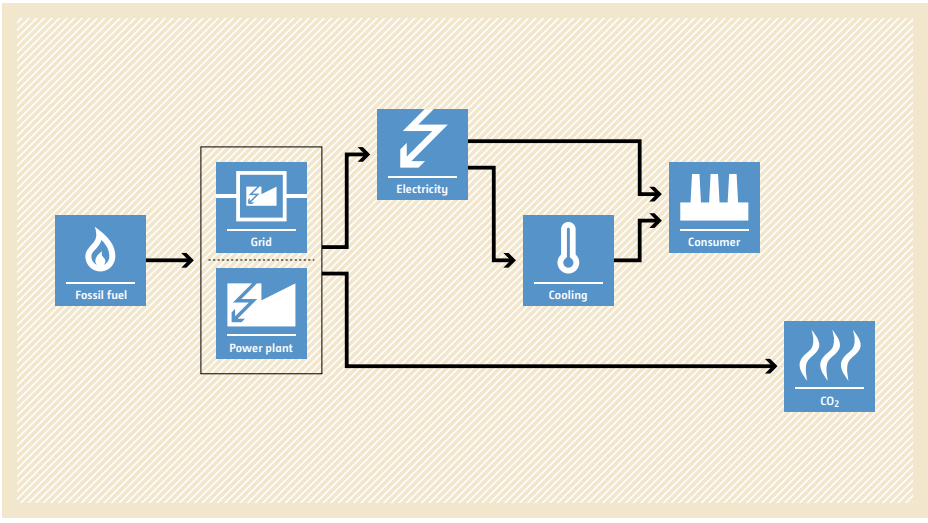
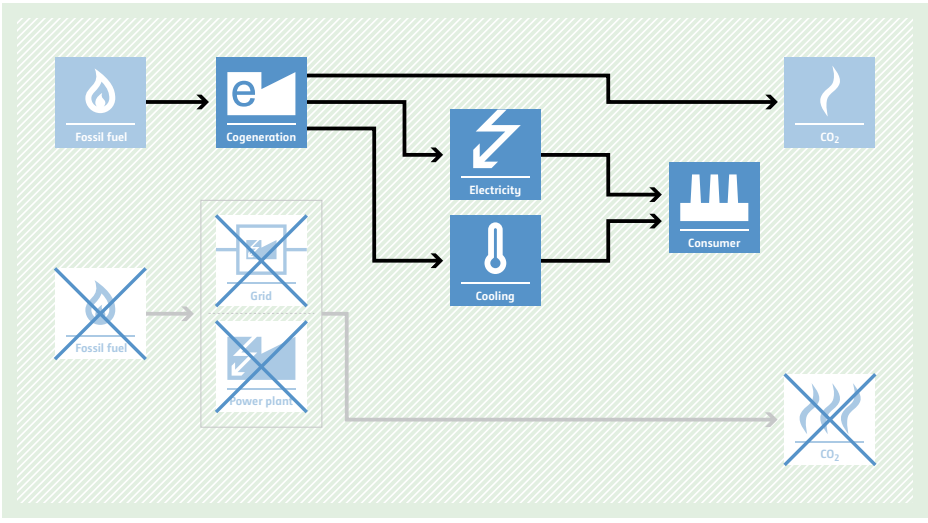
AM0082 Use of charcoal from planted renewable biomass in the iron ore reduction process through the establishment of a new iron ore reduction system

<p>Typical project(s)</p>	<p>Use of charcoal from planted biomass instead of fossil fuel based reducing agents, in the iron ore reduction process using blast furnace technology.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy. <p>Switch to a renewable source of carbon for the reduction of iron in blast furnaces.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The renewable biomass that is used for charcoal production originates from a dedicated plantation, located within the boundaries of the project activity; • The dedicated plantations are under the control of project participants either directly owned or through a long term contract; • The project does not rely on imported mineral coke.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Amount of reducing agent (i.e. coal coke) required to produce one tonne of hot metal. <p>Monitored:</p> <ul style="list-style-type: none"> • Production of hot metal by the project activity; • Parameters related to emissions from reducing agents production (carbonization and coal distillation); • Parameters related to iron ore reduction facility such as fuel/reducing agent consumption, their emission factors, hot metal produced and its carbon content etc.
<p>BASELINE SCENARIO The hot metal in iron and steel plant is produced using reducing agents of fossil fuel origin, resulting into high amount of CO₂ emissions.</p>	 <p>The diagram shows a linear process flow. It starts with a box labeled 'Fossil fuel' containing a flame icon. An arrow points to a box labeled 'Iron' containing a factory icon. A second arrow points to a box labeled 'CO₂' containing a flame icon. The entire flow is set against a light orange background with a diagonal hatching pattern.</p>
<p>PROJECT SCENARIO The new iron ore reduction system partially or fully replaces fossil-fuel-based reducing agent with charcoal of renewable origin, resulting into reduction of CO₂ emissions.</p>	 <p>The diagram shows a more complex process flow. It starts with a box labeled 'Plantation' containing an icon of three hands holding soil. An arrow points to a box labeled 'Biomass' containing a leaf icon. Another arrow points to a box labeled 'Charcoal' containing a factory icon. From the 'Charcoal' box, an arrow points to a box labeled 'Iron' containing a factory icon. A second arrow also points to the 'Iron' box, originating from a box labeled 'Fossil fuel' containing a flame icon. Finally, an arrow points from the 'Iron' box to a box labeled 'CO₂' containing a flame icon. The entire flow is set against a light green background with a diagonal hatching pattern.</p>


AM0083 Avoidance of landfill gas emissions by in-situ aeration of landfills

<p>Typical project(s)</p>	<p>Landfilled waste is treated aerobically on-site by means of air venting (overdrawing) or low pressure aeration with the objective of avoiding anaerobic degradation processes.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG emission avoidance. <p>The project avoids CH₄ emissions from landfills.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Aeration techniques used are either air venting (overdrawing) or low pressure aeration; • Treatment of landfilled waste is in closed landfills or closed landfill cells; • If mandatory environmental regulations require the collection and flaring of landfill gas, the corresponding compliance rate is below 50% in the host country; • Closed cells of operating or closed landfills might be eligible as long as they are physically distinct from the remaining parts of the landfill.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Amount of degradable waste disposed in the landfill; • Potential methane generation capacity; • Vented and surface emissions: volume and methane and nitrous oxide content.
<p>BASELINE SCENARIO Partial or total release of landfill gas from the closed landfill or the closed landfill cell.</p>	 <p>The baseline scenario flowchart shows a linear process starting with a 'Landfill' icon (a trash can), followed by an arrow to 'Landfill gas' (a flame), another arrow to 'Release' (a wavy arrow pointing up), and a final arrow to 'CH₄' (flames).</p>
<p>PROJECT SCENARIO In-situ aeration of the closed landfill or the closed landfill cell reduces GHG emissions.</p>	 <p>The project scenario flowchart shows a linear process starting with 'Air' (a wavy line), followed by an arrow to 'Landfill' (a trash can). From 'Landfill', an arrow points to 'Landfill gas' (a flame), which is crossed out with a large blue 'X'. Another arrow points to 'Release' (a wavy arrow pointing up), also crossed out with a large blue 'X'. A final arrow points to 'CH₄' (flames), which is also crossed out with a large blue 'X'.</p>

AM0084 Installation of cogeneration system supplying electricity and chilled water to new and existing consumers

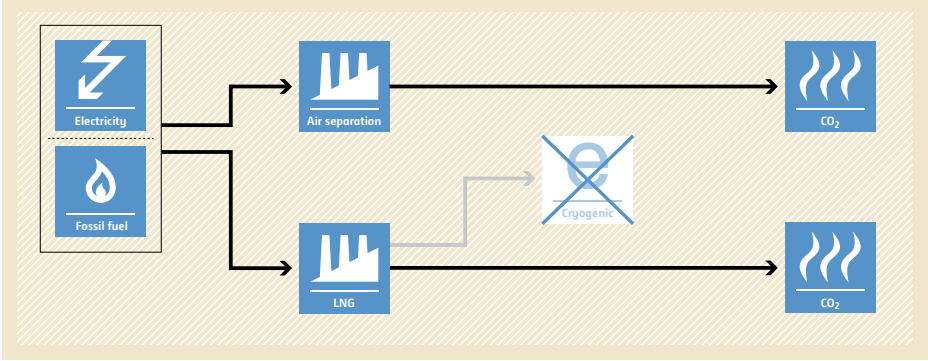
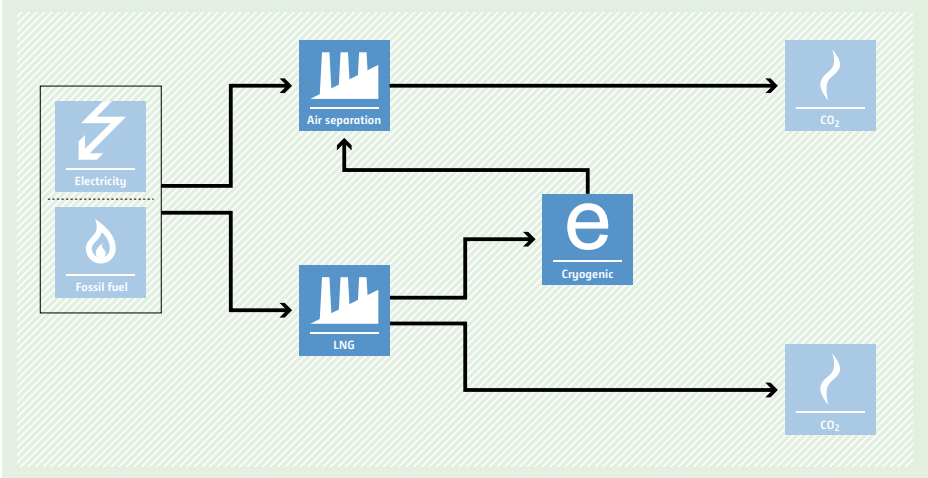
Typical project(s)	Installation of a new cogeneration plant producing chilled water and electricity.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • Energy efficiency. • Displacement of electricity and cooling that would be provided by more-carbon-intensive means.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • The chilled water is supplied by vapour compression chillers in the baseline and in the case of existing baseline facilities only used on-site by customers; • After the implementation of the project, the cogeneration facility cannot supply services to facilities that are outside the project boundary; • The demand of electricity and water at a consumer cannot exceed 110% of its historical level for a cumulative period longer than three months.
Important parameters	<p>At validation:</p> <ul style="list-style-type: none"> • Power consumption of the baseline vapour compression chiller(s). <p>Monitored:</p> <ul style="list-style-type: none"> • Electricity generated and consumed by the project; • Chilled water generated by the project.
BASILINE SCENARIO Consumers use electricity provided by an on-site power plant or by the grid. Consumption of electricity for the production of chilled water by the use of electrical chillers (vapour compression chillers).	 <p>The diagram illustrates the baseline scenario. On the left, a 'Fossil fuel' icon (flame) has an arrow pointing to a box containing 'Grid' and 'Power plant' icons. From this box, two arrows branch out: one to an 'Electricity' icon (lightning bolt) and one to a 'Cooling' icon (thermometer). Both the 'Electricity' and 'Cooling' icons have arrows pointing to a 'Consumer' icon (factory). A separate arrow from the 'Power plant' box points to a 'CO₂' icon (flame with wavy lines).</p>
PROJECT SCENARIO Consumers use electricity provided by a fossil-fuel-fired cogeneration system. The cogeneration system provides electricity and chilled water.	 <p>The diagram illustrates the project scenario. On the left, a 'Fossil fuel' icon (flame) has an arrow pointing to a 'Cogeneration' icon (flame with 'e'). From the 'Cogeneration' icon, two arrows branch out: one to an 'Electricity' icon (lightning bolt) and one to a 'Cooling' icon (thermometer). Both the 'Electricity' and 'Cooling' icons have arrows pointing to a 'Consumer' icon (factory). A separate arrow from the 'Cogeneration' icon points to a 'CO₂' icon (flame with wavy lines). Below this, a dashed box contains 'Grid' and 'Power plant' icons, both crossed out with a blue 'X'. A 'Fossil fuel' icon is also crossed out with a blue 'X'. An arrow from this crossed-out 'Fossil fuel' icon points to a 'CO₂' icon, which is also crossed out with a blue 'X', indicating that these emissions are avoided in the project scenario.</p>

AM0086 Distribution of low GHG emitting water purification systems for safe drinking water

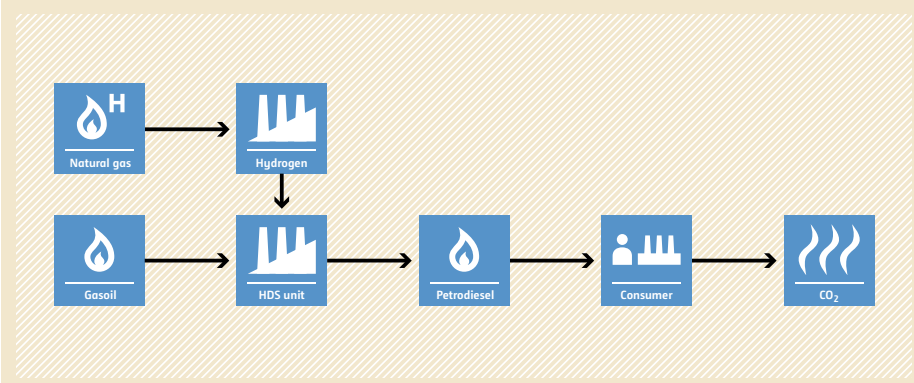
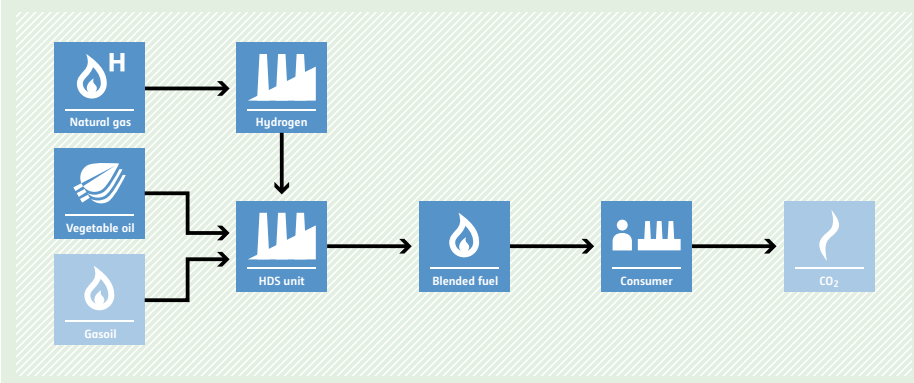


<p>Typical project(s)</p>	<p>Low GHG emitting water purification systems are distributed to consumers to provide safe drinking water (SDW).</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. • Displacement of more GHG intensive technologies to provide SDW.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • No public distribution network supplying SDW exists within the project boundary; • Project technology/equipment provides SDW based on laboratory testing or official notifications; • End users must have access to replacement purification systems; • Only for water purifiers sold or distributed within the first crediting period are eligible for claiming emissions reductions.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Fraction of population served by low GHG emitting water purification technologies; • Volume of drinking water per person; • Fraction of population which would use electricity or fuel type i to boil water. <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of purified water consumed; • Failure rate of the project water purification systems; • Number of project water purification systems; • Population that consumes the purified water serviced by the project activity; • Safe drinking water quality.
<p>BASELINE SCENARIO Energy consuming applications to produce safe drinking water will continue to be used in the households of a specific geographical area.</p>	<p>The diagram shows a flow from 'Water' and 'Fossil fuel/Electricity' to a 'Water purifier'. From the purifier, the flow goes to 'Drinking water' and then to a 'Consumer', and also to 'CO2' emissions.</p>
<p>PROJECT SCENARIO The low GHG emitting purifier displaces the current technologies/techniques for generation of safe drinking water in the households of a specific geographical area.</p>	<p>The diagram shows a flow from 'Fossil fuel/Electricity' to a factory-style 'Water purifier'. This purifier displaces household 'Water purifier' units (indicated by a red X). The factory purifier provides 'Drinking water' to a 'Consumer' and results in 'CO2' emissions, which are also marked with a red X to indicate displacement.</p>


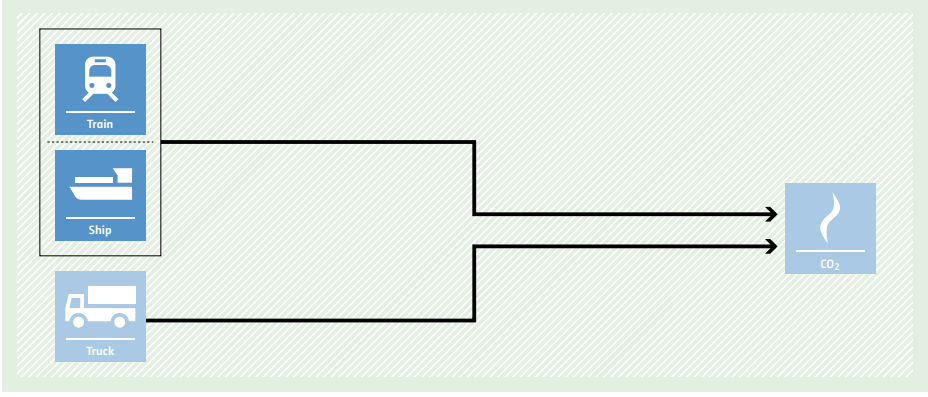
AM0088 Air separation using cryogenic energy recovered from the vaporization of LNG

<p>Typical project(s)</p>	<p>The construction and operation of a new air separation plant that utilizes the cryogenic energy recovered from a new or existing LNG vaporization plant for the air separation process.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Reduction in heat consumption for LNG vaporization and fuels/electricity use in air separation plants.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The purity of the oxygen and nitrogen produced by the new air separation plant is equal to or higher than 99.5%; • The new air separation plant is located at the same site as the LNG vaporization plant; • The cryogenic energy from existing LNG vaporization plant was not utilized for useful purposes and was being wasted prior to the implementation of the project.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Electricity emission factor (can also be monitored ex post); • Quantity of fossil fuels and electricity consumed by the air separation and the LNG Vaporization facilities; • Amount and physical properties of LNG vaporized. <hr/> <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of fossil fuels and electricity consumed by the Air Separation and the LNG Vaporization facilities; • Amount and physical properties of LNG vaporized and gas produced at the separation plant.
<p>BASELINE SCENARIO The air separation process would use fossil fuels or electricity for cooling.</p>	
<p>PROJECT SCENARIO The air separation process use cryogenic energy recovered from a LNG vaporization plant for cooling.</p>	

AM0089 Production of diesel using a mixed feedstock of gasoil and vegetable oil

<p>Typical project(s)</p>	<p>Production of petro/renewable diesel by switching the feedstock of hydrodesulphurization process (HDS) unit from 100% gasoil to a mixture of gasoil and vegetable oil in an existing refinery, where the vegetable oil comes from oilseeds from plants that are cultivated on dedicated plantations established on lands that are degraded or degrading at the start of the project.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy; • Feedstock switch. <p>Displacement of more-GHG-intensive feedstock for the production of diesel.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Three years of historical data are required for the HDS unit; • Energy consumption in the HDS unit under the project is lower or equal to the baseline scenario and any combustible gases and off-gases formed during the hydrogenation of vegetable oil have to be flared or used in the refinery as fuel; • The petro/renewable diesel is not exported to an Annex I country.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Ratio between the amount of renewable diesel produced and vegetable oil fed into HDS unit, density of renewable diesel. <p>Monitored:</p> <ul style="list-style-type: none"> • Amount of vegetable oil fed to HDS unit, volume of H₂ consumed in the HDS unit and amount of petro/renewable diesel produced by the project; • Project emissions from transport of oilseeds and/or vegetable oil if distances more than 50 km are covered; fossil fuel and electricity consumption of the vegetable oil production plant; • Leakage emissions related to the upstream emissions of excess natural gas and positive leakage associated with the avoided production of petrodiesel; • Destination of exported petro/renewable diesel produced by the project.
<p>BASELINE SCENARIO Diesel is produced from gasoil.</p>	 <pre> graph LR NG[Natural gas] --> H[Hydrogen] G[Gasoil] --> HDS[HDS unit] H --> HDS HDS --> PD[Petrodiesel] PD --> C[Consumer] C --> CO2[CO2] </pre>
<p>PROJECT SCENARIO Diesel is produced from mixture of gasoil and vegetable oil.</p>	 <pre> graph LR NG[Natural gas] --> H[Hydrogen] VO[Vegetable oil] --> HDS[HDS unit] G[Gasoil] --> HDS H --> HDS HDS --> BF[Blended fuel] BF --> C[Consumer] C --> CO2[CO2] </pre>

AM0090 Modal shift in transportation of cargo from road transportation to water or rail transportation

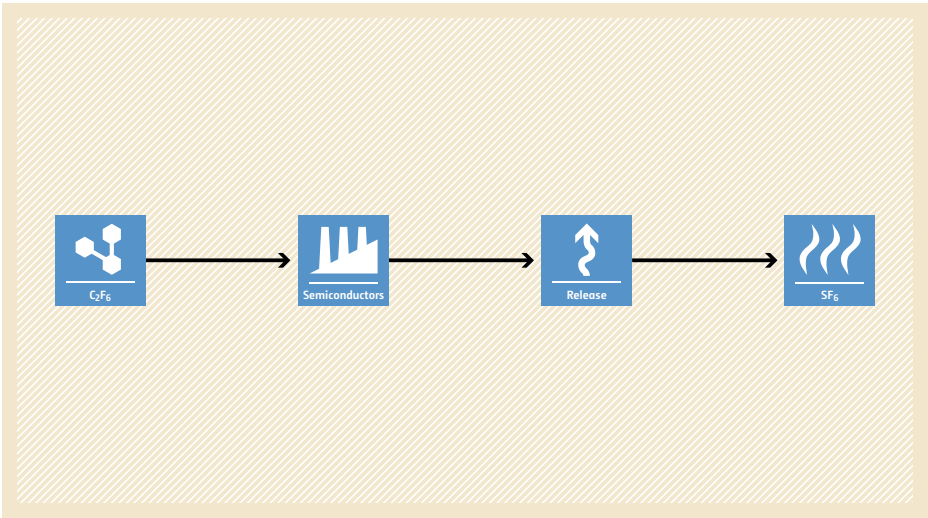
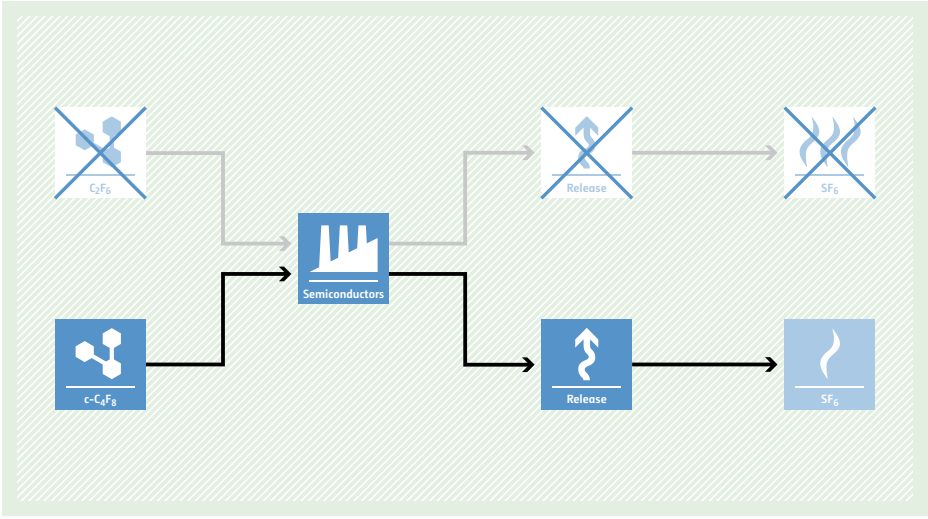
Typical project(s)	Transportation of cargo using barges, ships or trains.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • Energy efficiency. • Displacement of a more-carbon-intensive transportation mode.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • The owner of the cargo is one of the project participants. If the entity investing in the project is not the owner of the cargo, it should also be a project participant; • The project should have made at least one of the following new investments: direct investment in new infrastructure for water transportation or for rail transportation, or refurbishment/replacement of existing water and rail transportation infrastructure or equipments, with transport capacity expansion; • The cargo type, transportation mode, and transportation routes of the project are defined at the validation of the project and no change is allowed thereafter; • Both in the baseline and project, only one type of cargo is transported and no mix of cargo is permitted.
Important parameters	<p>At validation:</p> <ul style="list-style-type: none"> • Distance of the baseline trip route (both forward and return trips). <hr/> <p>Monitored:</p> <ul style="list-style-type: none"> • Fuel and/or electricity consumption by the project transportation mode; • Amount of cargo transported by the project transportation mode (both forward and return trips).
<p>BASELINE SCENARIO The cargo is transported using trucks.</p>	
<p>PROJECT SCENARIO The cargo is transported using barges, ships or trains.</p>	

AM0091 Energy efficiency technologies and fuel switching in new and existing buildings

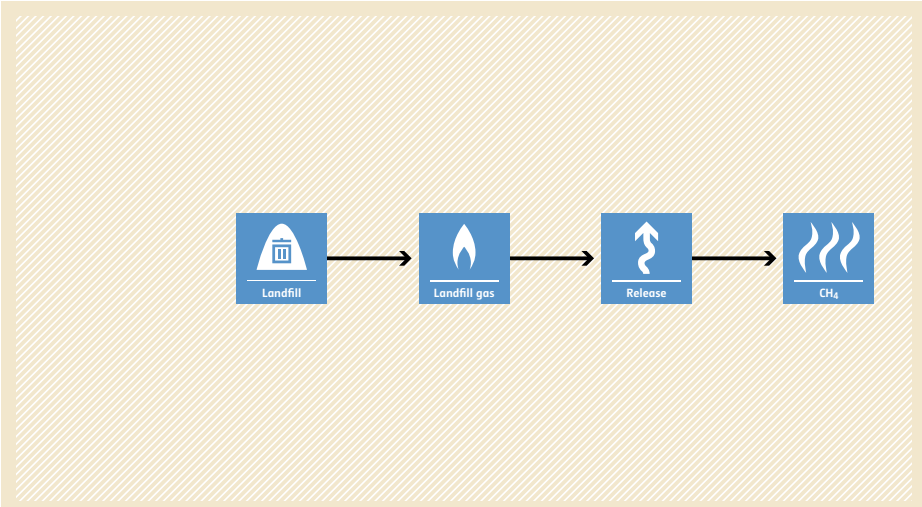
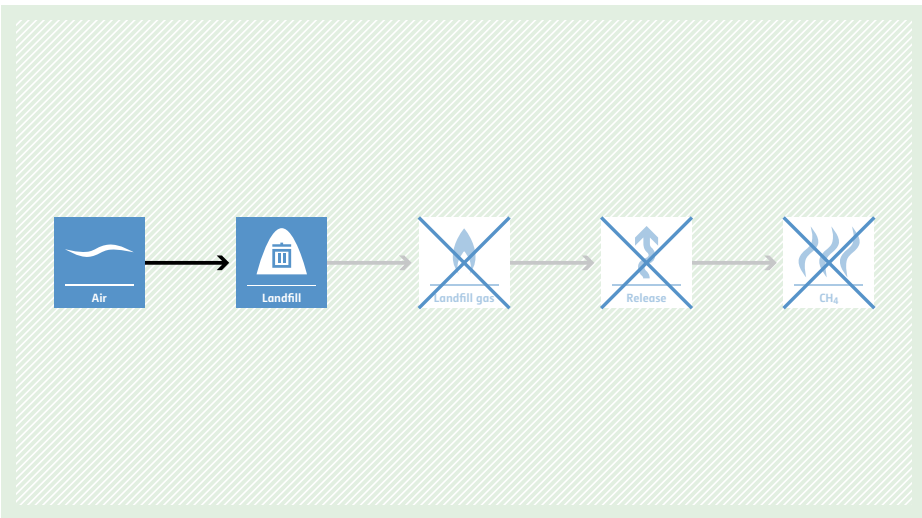


<p>Typical project(s)</p>	<p>Project activities implementing energy efficiency measures and/or fuel switching in new and existing building units (residential, commercial, and/or institutional building units). Examples of the measures include efficient appliances, efficient thermal envelope, efficient lighting systems, efficient heating, ventilation and air conditioning (HVAC) systems, passive solar design, optimal shading, building energy management systems (BEMS), and intelligent energy metering.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy Efficiency. <p>Electricity and/or fuel savings through energy efficiency improvement. Use of less-carbon-intensive fuel.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Building units should belong to residential, commercial and institutional categories as defined in methodology; • Eligible sources of emissions include consumption of electricity, fossil fuel, and chilled water as well as leakage of refrigerant used in the building units; • Biogas, biomass or cogeneration systems should not be the source of thermal or electrical energy for project building units and chilled/hot water systems used for project building units; • All the project building units must comply with all applicable national energy standards (e.g. building codes) if they exist and are enforced.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Emission factors of fuel used in baseline buildings; • Historical average retail price of the fuel most commonly used in the baseline building units. <p>Monitored:</p> <ul style="list-style-type: none"> • Total number of efficient appliances of type n that are used in registered CDM project(s) in the host country; • Gross floor area of project buildings; • Fuel consumption, quantity and energy content of hot/chilled water consumed and electricity consumption in project buildings; • Emission factors and calorific values of fuels.
<p>BASILINE SCENARIO Residential, commercial and institutional building units (similar to those constructed and then occupied in the project activity) will result in higher emissions due to fuel, electricity and chilled/hot water consumption.</p>	
<p>PROJECT SCENARIO Energy efficient residential, commercial and institutional project building units will result in lower emissions due to lower consumption of fuel, electricity and chilled/hot water.</p>	

AM0092 Substitution of PFC gases for cleaning Chemical Vapour Deposition (CVD) reactors in the semiconductor industry

<p>Typical project(s)</p>	<p>Projects activities that reduce PFC emissions through replacement of C_2F_6 with $c-C_4F_8$ (octa-fluoro-cyclo-butane) as a gas for in-situ cleaning of CVD reactors in the semiconductor industry.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Fuel or feedstock switch. Displacement of C_2F_6 with $c-C_4F_8$.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> Production lines included in the project boundary started commercial operation before 1 January 2010 and have an operational history of at least three years prior to the implementation of the project activity, during which the original PFC gas was C_2F_6; The substitute PFC gas is not temporarily stored for subsequent destruction.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Consumption of C_2F_6 in the baseline; Production of substrate in the baseline.
	<p>Monitored:</p> <ul style="list-style-type: none"> Consumption of $c-C_4F_8$; Production of substrate.
<p>BASILINE SCENARIO The baseline scenario is the continuation of the current situation, i.e. the continuation of the same baseline feedstock (i.e. CVD reactors cleaned with C_2F_6).</p>	 <p>The baseline scenario flowchart shows a linear process: C_2F_6 (represented by a molecular structure icon) is used in Semiconductors (represented by a factory icon). This leads to Release (represented by an upward arrow icon), which then results in SF_6 (represented by a flame icon).</p>
<p>PROJECT SCENARIO The project scenario is CVD reactors cleaned with $c-C_4F_8$.</p>	 <p>The project scenario flowchart shows the substitution of C_2F_6 with $c-C_4F_8$. The original path from C_2F_6 to Semiconductors, Release, and SF_6 is shown with a large 'X' over it, indicating it is no longer active. The new path starts with $c-C_4F_8$ (represented by a molecular structure icon) entering the Semiconductors (factory icon) process. This leads to Release (upward arrow icon), which then results in SF_6 (flame icon).</p>

AM0093 Avoidance of landfill gas emissions by passive aeration of landfills

<p>Typical project(s)</p>	<p>Landfilled waste is treated aerobically on-site by means of passive aeration with the objective of avoiding anaerobic degradation processes.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG emission avoidance. <p>The project avoids CH₄ emissions from landfills.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Treatment of landfilled waste is in closed landfills or closed landfill cells; • If mandatory environmental regulations require the collection and flaring of landfill gas, the corresponding compliance rate is below 50% in the host country; • Closed cells of operating landfills might be eligible as long as they are physically distinct from the remaining parts of the landfill; • Distance between vertical venting wells should not be more than 40m.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Amount of biodegradable waste disposed in the landfill. <p>Monitored:</p> <ul style="list-style-type: none"> • Potential methane generation capacity; • Vented and surface emissions: volume and methane and nitrous oxide content.
<p>BASELINE SCENARIO Partial or total release of landfill gas from the closed landfill or the closed landfill cell.</p>	 <p>The diagram illustrates the baseline scenario with a light orange background. It shows a linear flow from left to right: a 'Landfill' icon (a trash can) leads to 'Landfill gas' (a flame), which leads to 'Release' (a vertical arrow pointing up), which finally leads to 'CH₄' (flames).</p>
<p>PROJECT SCENARIO In-situ passive aeration of the closed landfill or the closed landfill cell reduces GHG emissions.</p>	 <p>The diagram illustrates the project scenario with a light green background. It shows a linear flow from left to right: 'Air' (a wavy line) enters a 'Landfill' (trash can icon). From the landfill, the flow goes to 'Landfill gas' (flame icon), then to 'Release' (vertical arrow icon), and finally to 'CH₄' (flame icon). All four stages from 'Landfill gas' onwards are crossed out with a large blue 'X', indicating that these emissions are avoided through passive aeration.</p>

AM0094 Distribution of biomass based stove and/or heater for household or institutional use

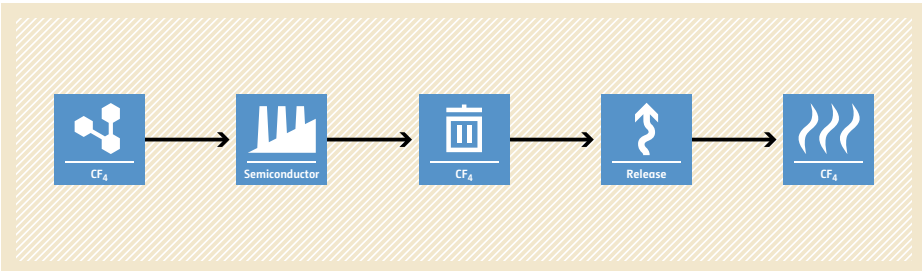
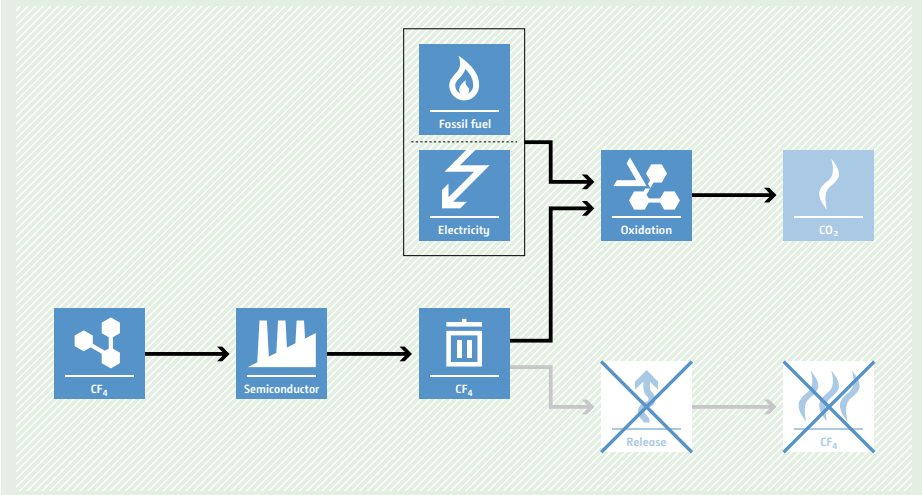


<p>Typical project(s)</p>	<p>Distribution of biomass based stoves and/or heaters and the supply of biomass briquettes for household or institutional use.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Renewable energy. <p>Displacement of more-GHG-intensive thermal energy production by introducing renewable energy technologies.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> The total project area (TPA) is defined prior to the start of the project activity and will not be changed later; Biomass penetration rate in the TPA is $\leq 10\%$; The biomass based stove or heater shall have a rated capacity of not more than 150 kW thermal; A contractual agreement between the project consumers and the project participants shall ensure that the project consumers do not claim any CERs from the use of stove and/or heater and biomass briquettes.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Percentage of biomass used as a fuel for cooking purposes or heating purposes, on energy basis, in project area(s); Proportion of fuel(s) used in the stoves or heaters in project area(s) in the baseline; Proportion of stove or heater type(s) used in project area(s) in the baseline. <p>Monitored:</p> <ul style="list-style-type: none"> Dry weight of biomass briquettes consumed by project consumer(s) in project area(s); NCV of biomass briquettes; Proportion of project stove or heater type(s) in use in project area(s).
<p>BASELINE SCENARIO Continuation of the use of existing stove or heater technologies and fossil fuels for thermal application.</p>	
<p>PROJECT SCENARIO Use of biomass based stoves and/or heaters and the supply of biomass briquettes for thermal application.</p>	

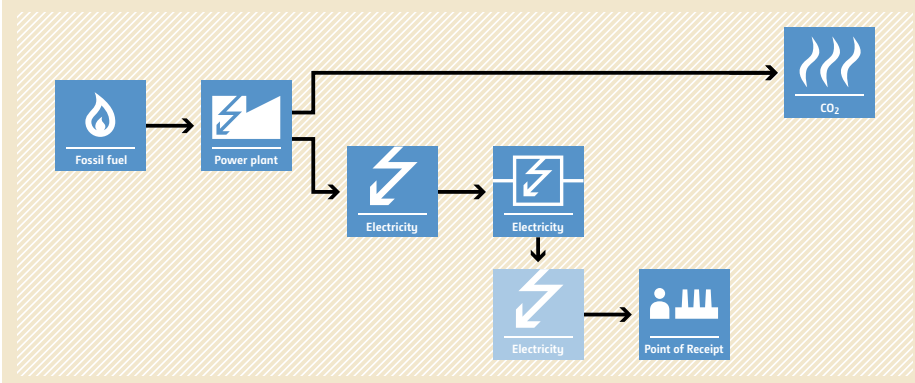
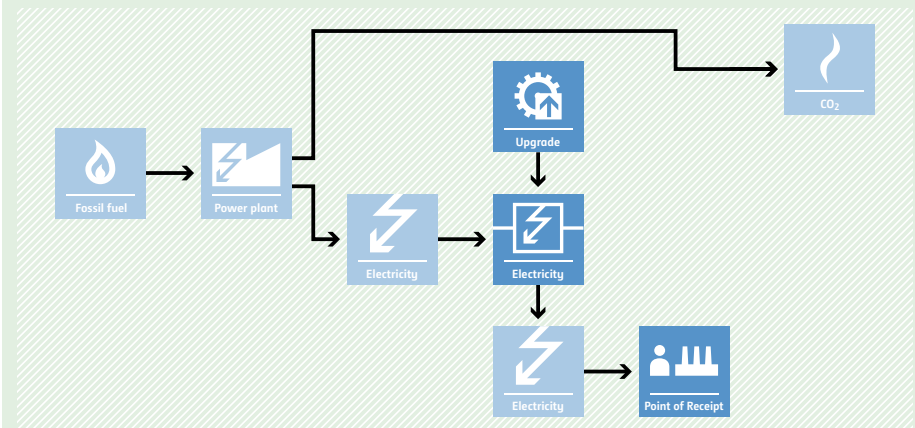
AM0095 Waste gas based combined cycle power plant in a Greenfield iron and steel plant

<p>Typical project(s)</p>	<p>Project activities that construct and operate a captive or grid-connected combined cycle electricity generation power plant in a Greenfield iron and steel plant, using waste gas such as blast furnace gas, coke oven gas, and converter gas sourced from the same facility.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Waste energy recovery in order to displace more-carbon-intensive source of energy.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Specifications of coke oven and iron and steel plant has been determined before the project activity is considered; • The project participants have to demonstrate that the level of use of waste gas for power production in the iron and steel plant is the same in absence of and after the implementation of the CDM project activity.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Data on waste gas based electricity generation in top 20% Rankine cycle based power plant in other iron and steel plants; • Energy Efficiency of waste gas based Rankine cycle based power plants in iron & steel plant using manufacturer's data. <p>Monitored:</p> <ul style="list-style-type: none"> • Data required to calculate grid emission factor; • Net Calorific Value of waste gas, and supplementary and auxiliary fuels; • Quantity of supplementary and auxiliary fuel fired and quantity of waste gas consumed by project power plant; • Net electricity generated by project power plant.
<p>BASELINE SCENARIO Construction of Rankine cycle based power plant using the same waste gas type and quantity as used in the project power plant.</p>	
<p>PROJECT SCENARIO Energy efficient combined cycle based power plant recovering energy from waste gas in a greenfield iron and steel plant.</p>	

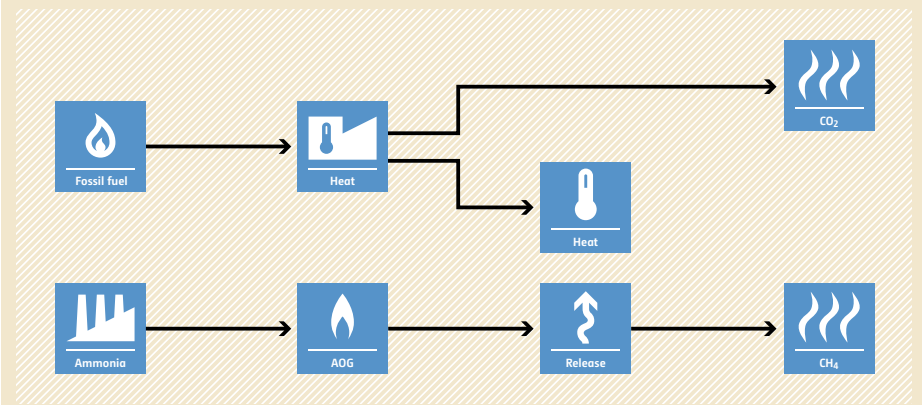
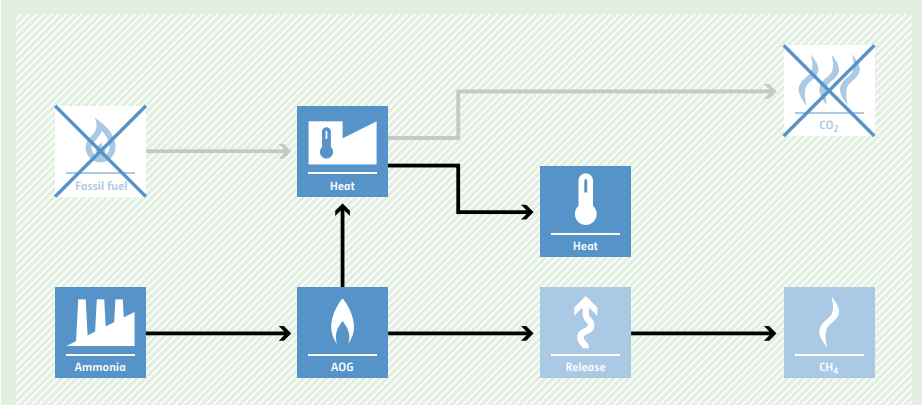
AM0096 CF₄ emission reduction from installation of an abatement system in a semiconductor manufacturing facility

<p>Typical project(s)</p>	<p>Installation of an abatement system in an existing semiconductor manufacturing facility for the abatement of CF₄ from the semiconductor etching process.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG destruction. • Destruction of CF₄ emissions.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Applicable to existing production lines without CF₄ abatement device installed and where CF₄ was being vented in the last three years; • CF₄ is not temporarily stored or consumed for subsequent abatement; • CF₄ abatement at the same industrial site where the CF₄ is used; and CF₄ to be abated is not imported from other facilities; • Not applicable to project activities which reduce emissions of PFCs from Chemical Vapour Deposition (CVD) processes.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Amount of CF₄ consumed in years prior to the implementation of the project activity; • Amount of semiconductor substrate produced in years prior to the implementation of the project activity. <p>Monitored:</p> <ul style="list-style-type: none"> • Amount of CF₄ consumed; • Amount of semiconductor substrate produced; • Calibrated flow rate of Helium (He) gas added to duct before entering to the abatement system during a monitoring interval; • He concentration entering the abatement system and out of the abatement system; • Concentration of CF₄ in the gas entering the abatement system and in the gas leaving the abatement system; • Temperature at mass flow controller.
<p>BASELINE SCENARIO CF₄ is vented to the atmosphere after being used in the semiconductor etching process.</p>	 <p>The diagram shows a linear process flow: CF₄ gas (represented by a molecular icon) is used in a 'Semiconductor' manufacturing process (factory icon). The resulting CF₄ gas (waste bin icon) is then released (upward arrow icon) into the atmosphere (flame icon).</p>
<p>PROJECT SCENARIO CF₄ is recovered and destroyed in a catalytic oxidation unit (abatement system) located after the etching unit.</p>	 <p>The diagram shows a process flow where CF₄ gas is used in a 'Semiconductor' process. Instead of being released, it is captured and sent to a 'Catalytic Oxidation Unit'. This unit is powered by 'Fossil fuel' and 'Electricity' (indicated by a box containing a flame and a lightning bolt icon). The oxidation process produces CO₂ (flame icon). The original 'Release' and 'CF₄' steps from the baseline scenario are shown with a large 'X' over them, indicating they are avoided.</p>

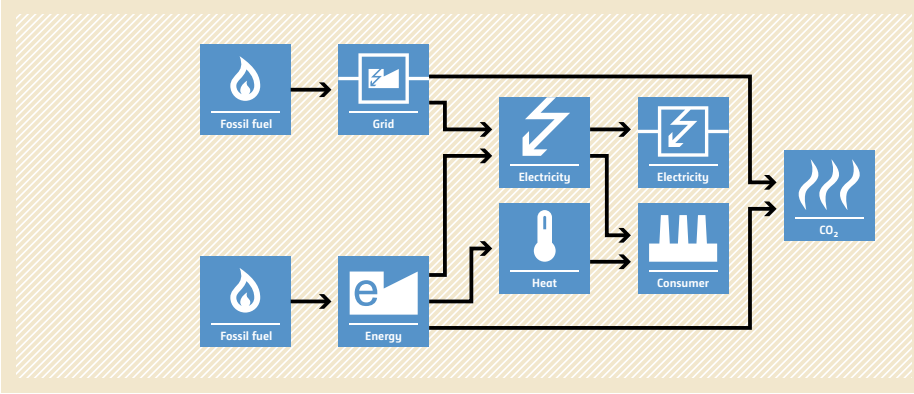
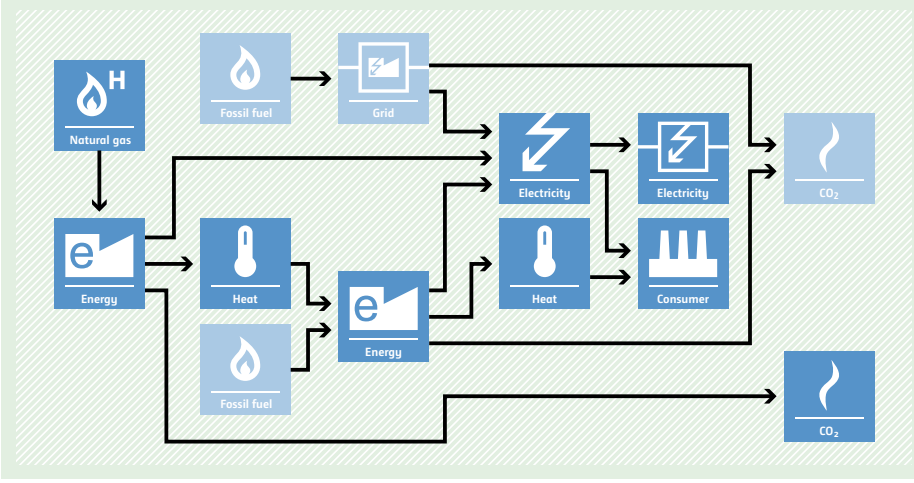
AM0097 Installation of high voltage direct current power transmission line

<p>Typical project(s)</p>	<p>Installation of Greenfield High Voltage Direct Current (HVDC) power transmission line/s for transmission of power from point of origin/supply to the point of receipt; or replacement of existing alternating current power transmission line by a new HVDC power transmission line.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Energy efficient electricity transmission line instead of inefficient electricity transmission line.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Project participants shall invest in setting up a HVDC power transmission line and utilize it; • Project participant shall demonstrate through verifiable data that the right-of-way requirement for the project activity is less than for the baseline scenario; • This methodology is not applicable to project activities that seek to expand or retrofit existing grids by the construction of a new piece of HVDC transmission line.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Data required for simulation software to calculate technical losses of baseline transmission line. This includes voltage, length, inductance, capacitance, and sub-station spacing of baseline transmission line. <p>Monitored:</p> <ul style="list-style-type: none"> • Gross electricity evacuated from the point of supply in project year using project transmission line; • Net electricity received at the point of receipt; • Right-of-way requirement for the transmission line under the project as well as under baseline.
<p>BASELINE SCENARIO Implementation or continuation of inefficient power transmission line.</p>	
<p>PROJECT SCENARIO Energy efficient HVDC transmission line.</p>	

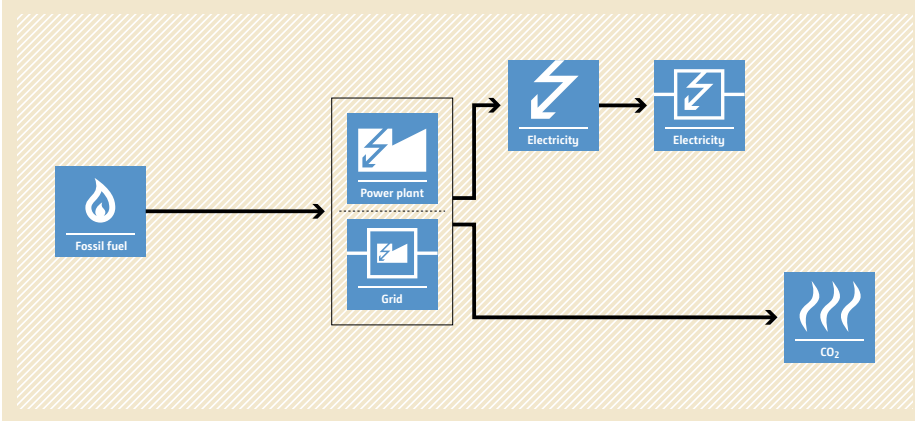
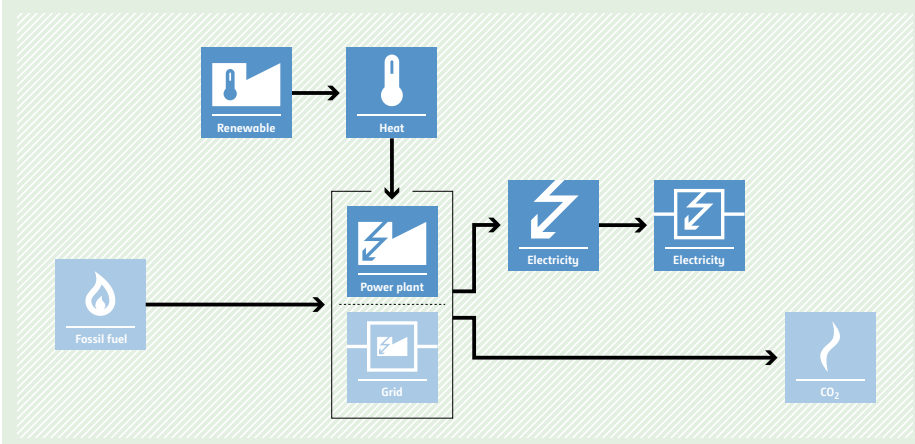
AM0098 Utilization of ammonia-plant off gas for steam generation

<p>Typical project(s)</p>	<p>Utilization of ammonia-plant off gas (AOG), which was being vented, for heat generation at an existing ammonia production plant.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG destruction. • Destruction of methane emissions and displacement of a more-GHG-intensive service.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • AOG is only used to generate steam to meet heat demands in the existing ammonia production plant and/or in nearby facilities in the same project site; • Amount of AOG vented from the start of operations at the existing ammonia production plant until the implementation of the project activity shall be demonstrated; • Regulations of the host country do not prohibit the venting of gases with the physical and chemical characteristics of the AOG.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Volume of AOG vented by the existing ammonia production facility in historical years; • Total production of ammonia in historical years; • Average volume fraction of methane in the AOG in historical years. <p>Monitored:</p> <ul style="list-style-type: none"> • Volume of AOG recovered and used for steam generation by the project activity; • Total production of ammonia; • Average volume fraction of methane in the AOG recovered in the project activity; • Carbon density of AOG; • Net quantity of heat generated from AOG combustion; • Volume fraction of methane in the exhaust out of ammonia recovery section; • Volume of gaseous stream vented to the atmosphere out of the ammonia recovery section of AOG.
<p>BASELINE SCENARIO AOG is vented to the atmosphere.</p>	 <p>The baseline scenario flowchart shows two parallel processes. The top process starts with 'Fossil fuel' (flame icon) leading to 'Heat' (thermometer icon). This 'Heat' is then split: one path goes to another 'Heat' (thermometer icon) and then to 'CO2' (flame icon), while the other path goes to 'AOG' (flame icon). The bottom process starts with 'Ammonia' (factory icon) leading to 'AOG' (flame icon). This 'AOG' is then split: one path goes to 'Release' (upward arrow icon) and then to 'CH4' (flame icon), while the other path goes to 'Heat' (thermometer icon) and then to 'CO2' (flame icon).</p>
<p>PROJECT SCENARIO AOG is collected and utilized to generate heat.</p>	 <p>The project scenario flowchart is similar to the baseline but with modifications. 'Fossil fuel' (flame icon) is crossed out with a blue 'X'. 'AOG' (flame icon) from the ammonia process is collected and used to generate 'Heat' (thermometer icon). This 'Heat' is then used to generate 'CO2' (flame icon) and also to generate another 'Heat' (thermometer icon). The 'AOG' from the ammonia process is also split: one path goes to 'Release' (upward arrow icon) and then to 'CH4' (flame icon), while the other path goes to 'Heat' (thermometer icon) and then to 'CO2' (flame icon).</p>

AM0099 Installation of a new natural gas fired gas turbine to an existing CHP plant

<p>Typical project(s)</p>	<p>Installation a new natural-gas-fired gas turbine at a site where there is an existing combined heat and power (CHP) plant and supply of the electricity to the grid or an existing electricity consuming facility and waste heat to the existing CHP plant.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Low carbon electricity; • Energy efficiency. <p>Displacement of more-GHG-intensive electricity generation in a grid or captive power plant and supply of heat.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The steam from the heat recovery steam generator (HRSG) is not directly supplied to final users/consumers; • The existing CHP plant produced electricity and steam for at least three years prior to the implementation of the project activity.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Amount of historical steam generation of the existing CHP; • Amount, emission factor and net calorific value (NCV) of fuel historically used to generate steam at the existing CHP plant. <p>Monitored:</p> <ul style="list-style-type: none"> • Electricity generated by the gas turbine that is fed into the grid and/or supplied to the electricity consuming facility; • Total electricity supplied to the grid by the existing steam turbine generator (STG) at the project site; • Steam generated by the project facility from heat recovery steam generator (HRSG); • Steam generated by the existing steam boilers.
<p>BASELINE SCENARIO Electricity is generated in the grid or captive power plant using more-carbon-intensive fuel and steam/heat is generated in existing steam boilers.</p>	 <p>The baseline scenario flowchart shows two inputs of fossil fuel. One path goes to a 'Grid' icon, which then feeds into an 'Electricity' icon. The other path goes to an 'Energy' icon, which feeds into a 'Heat' icon. Both 'Electricity' and 'Heat' icons feed into a 'Consumer' icon. Finally, the 'Consumer' icon leads to a 'CO2' emissions icon.</p>
<p>PROJECT SCENARIO Electricity is generated using natural gas and heat/steam is generated from waste heat from the gas turbine.</p>	 <p>The project scenario flowchart shows two inputs of fossil fuel. One path goes to a 'Grid' icon, which then feeds into an 'Electricity' icon. The other path goes to an 'Energy' icon. Additionally, 'Natural gas' (represented by a flame with 'H') is input into a new 'Energy' icon. This new 'Energy' icon feeds into a 'Heat' icon. The 'Heat' icon then feeds into a 'Consumer' icon. Finally, the 'Consumer' icon leads to a 'CO2' emissions icon.</p>

AM0100 Integrated Solar Combined Cycle (ISCC) projects

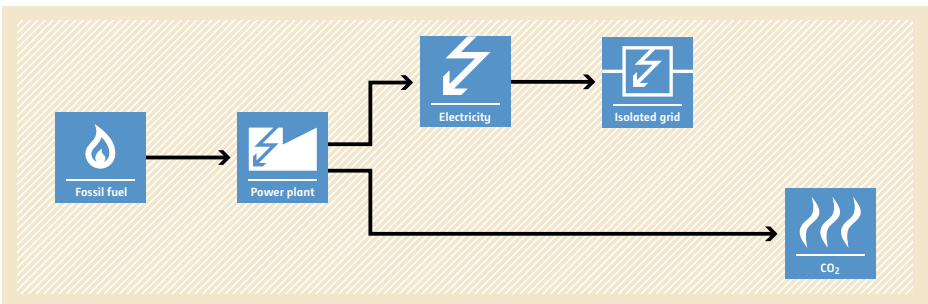
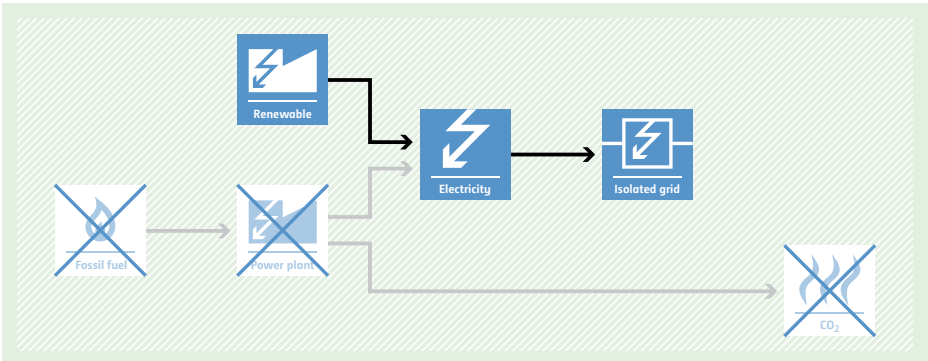
<p>Typical project(s)</p>	<p>Implementation of Integrated Solar Combined Cycle (ISCC) projects.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable Energy. <p>Displacement of electricity that would be provided to the grid by more-GHG-intensive means.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Applicable to: <ul style="list-style-type: none"> – Conversion of an existing Combined Cycle Power Plant into an ISCC; or – Conversion of an existing single cycle gas turbine power plant into an ISCC, where the project activity comprises exclusively the Solar Field and Supplementary Firing; or – Construction of a new ISCC, where the project activity comprises exclusively the Solar Field and Supplementary Firing; • Electric Solar Capacity does not account for more than 15% of the Electric Steam Turbine Capacity of the ISCC.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Average temperature, pressure and mass flow of steam leaving the solar steam generator; • Average temperature, pressure and mass flow of high pressure and low pressure steam entering the steam turbine and at the condenser outlet; • Gross electricity generation from gas turbine; • Net electricity generation from the ISCC; • Mass or volume, net calorific value (NCV), and emission factor of supplementary fuel; • Grid emission factor and/or emission factor of supplementary firing.
<p>BASELINE SCENARIO Electricity is generated in the grid using more-carbon-intensive fuel.</p>	
<p>PROJECT SCENARIO Electricity is generated using steam generated from solar collectors and reducing the use of fossil fuel.</p>	

AM0101 High speed passenger rail system

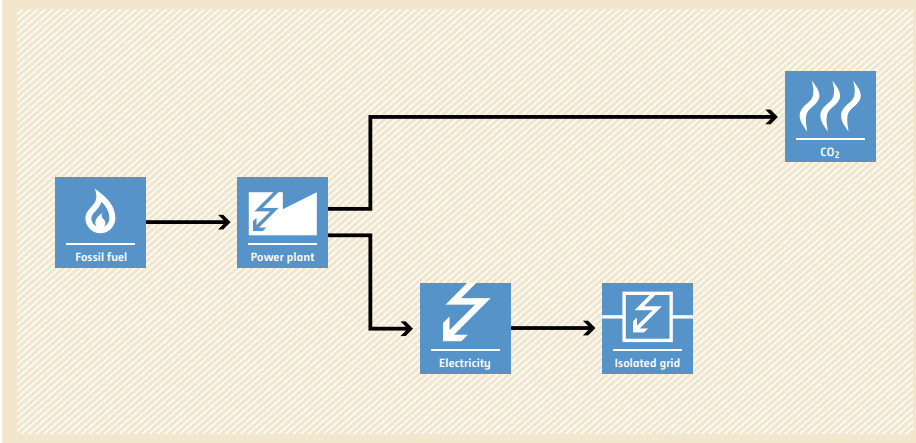
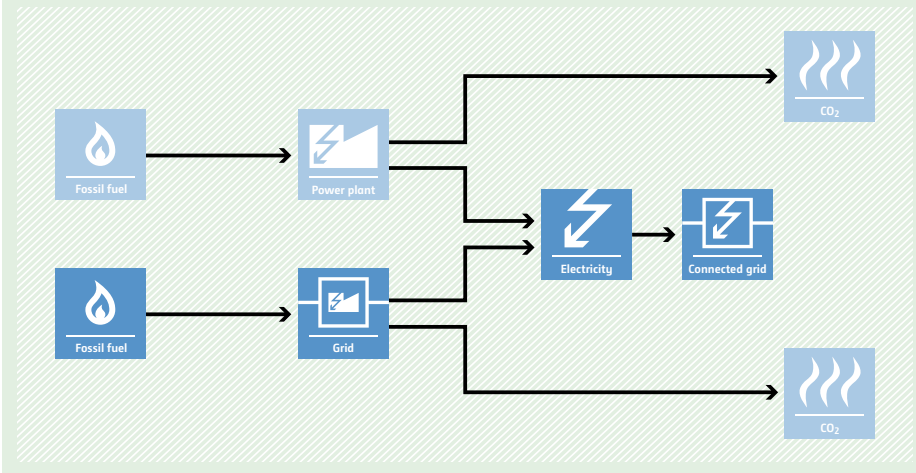


<p>Typical project(s)</p>	<p>Establishment and operation of a new high speed rail system. Extension of an existing high speed rail system. Replacement or upgrading of a conventional rail system to the high speed rail system.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Energy efficiency. <p>Displacement of more GHG-intensive transport modes (airplanes, buses, conventional rail, motorcycles and personal cars) by less-GHG intensive one (high speed rail).</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> The project establishes a new rail-based infrastructure for high speed rail. The new rail infrastructure can be the extension of an existing high speed rail system. It can also be the replacement or upgrading of an existing conventional rail system to high speed rail system; The average design speed between the origin and the destination point of the new HSR shall be at least 200 km/h; The project activity shall be an inter-urban passenger transport only; The entire high speed rail system must be located in the same host country; The average distance between all stations served by the project high speed rail system is at least 20 km.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Baseline distance and transport mode, which are obtained through a comprehensive survey involving the users of the project transport system; Specific fuel consumption, occupancy rates and travelled distances of different transport modes; If expected emissions per passenger kilometer for HSR system is less than or equal to 0.08 kWh/pkm, the project is considered automatically additional. <p>Monitored:</p> <ul style="list-style-type: none"> Total number of passengers travelled by the project high speed rail system; Share of the project passengers or the number of passengers who would have travelled by the relevant modes of transport in absence of the project activity; Passenger trip distances.
<p>BASELINE SCENARIO Passengers transported between cities using a conventional transport system including buses, trains, cars, motorcycles and airplanes.</p>	<p>The diagram illustrates the baseline scenario where passengers are transported between cities using conventional transport modes. On the left, there are five icons representing different transport modes: Train, Bus, Car, Motorcycle, and Airplane. Lines from each of these icons converge and lead to a single icon on the right representing CO2 emissions, indicating that all these modes contribute to the baseline carbon footprint.</p>
<p>PROJECT SCENARIO Passengers are transported between cities by the high-speed passenger rail-based system that partially displaces the existing modes of inter-urban transport.</p>	<p>The diagram illustrates the project scenario where a high-speed passenger rail-based system is introduced. On the left, the same five transport mode icons (Train, Bus, Car, Motorcycle, Airplane) are present. However, the lines from the Train icon are significantly thicker and more numerous than in the baseline scenario, indicating a large increase in passenger volume. The lines from the other modes (Bus, Car, Motorcycle, Airplane) are thinner, showing that the high-speed rail system has partially displaced these other modes. On the right, the CO2 emissions icon shows a smaller flame, indicating a reduction in total carbon emissions compared to the baseline scenario.</p>

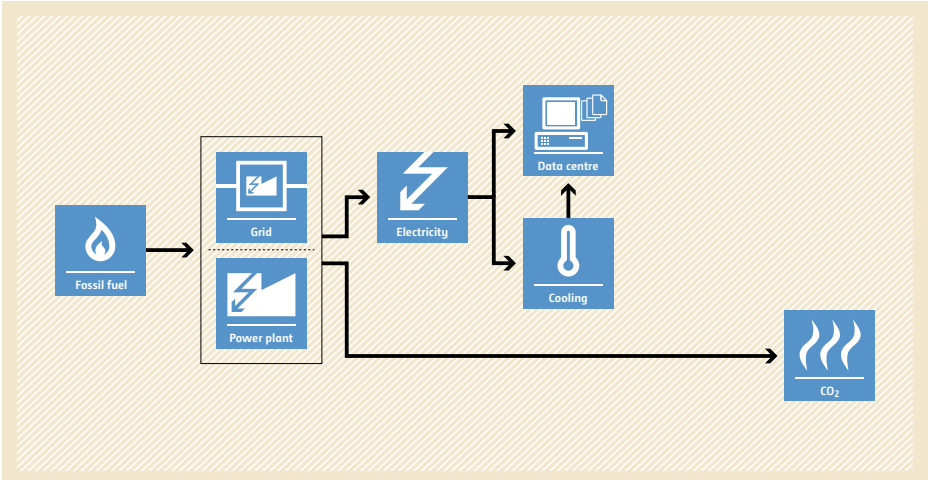
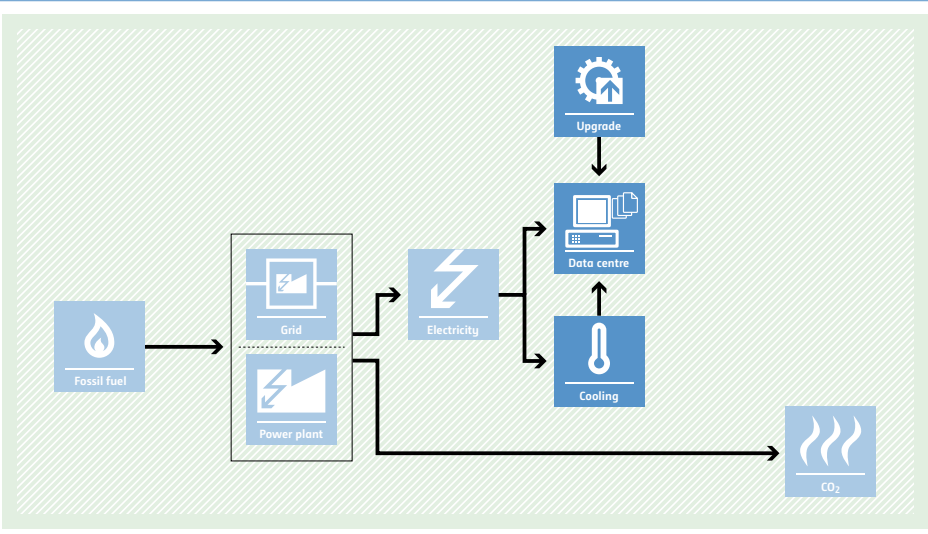
AM0103 Renewable energy power generation in isolated grids

<p>Typical project(s)</p>	<p>Power generation using renewable energy sources connected to a new or an existing isolated grid.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy. <p>Displacement of electricity that would be provided to the isolated grid by more-GHG-intensive means.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project power plant is using one of the following sources: hydro, wind, geothermal, solar, wave or tidal power. Biomass-fired power plants are not applicable; • In case of hydro power: <ul style="list-style-type: none"> – The project shall be implemented in an existing reservoir, with no change in the volume of reservoir; – The project shall be implemented in an existing reservoir, where the volume of reservoir is increased and the power density is greater than 4 W/m²; – The project results in new reservoirs and the power density is greater than 4 W/m²; or – The project activity is an integrated hydro power project involving multiple reservoirs; • The following technologies are deemed automatically additional if their penetration rate of the specific technology is below 2 per cent of the total installed isolated grid connected power generation capacity in the host country or the total installed isolated grid power generation capacity of the specific technology in the host country is less than or equal to 50 MW: <ul style="list-style-type: none"> – Solar photovoltaic technologies; – Solar thermal electricity generation including concentrating Solar Power (CSP); – Off-shore wind technologies; – Marine wave technologies; – Marine tidal technologies; – Ocean thermal technology.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Emission factor of the isolated grid. <p>Monitored:</p> <ul style="list-style-type: none"> • Electricity supplied to the isolated grid by the project.
<p>BASELINE SCENARIO Generation of electricity with fossil-fuel-fired generators (e.g. diesel generators).</p>	 <p>The diagram illustrates the baseline scenario. It shows a flow from 'Fossil fuel' (represented by a flame icon) to a 'Power plant' (represented by a lightning bolt icon). From the power plant, two paths emerge: one leading to 'Electricity' (lightning bolt icon) which then feeds into an 'Isolated grid' (lightning bolt icon in a box), and another leading directly to 'CO₂' emissions (flame icon). The entire process is set against a light orange background.</p>
<p>PROJECT SCENARIO A renewable energy power plant displaces the energy that was generated by fossil fuel sources.</p>	 <p>The diagram illustrates the project scenario. It shows a flow from 'Renewable' energy (lightning bolt icon) to a 'Power plant' (lightning bolt icon). From the power plant, two paths emerge: one leading to 'Electricity' (lightning bolt icon) which then feeds into an 'Isolated grid' (lightning bolt icon in a box), and another leading to 'CO₂' emissions (flame icon). The 'Fossil fuel' and 'Power plant' icons from the baseline scenario are shown with a large 'X' over them, indicating they are displaced. The entire process is set against a light green background.</p>

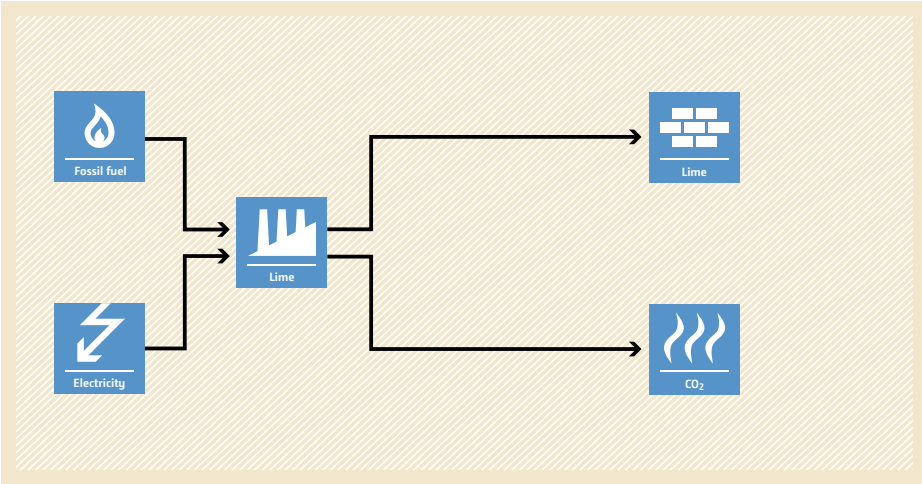
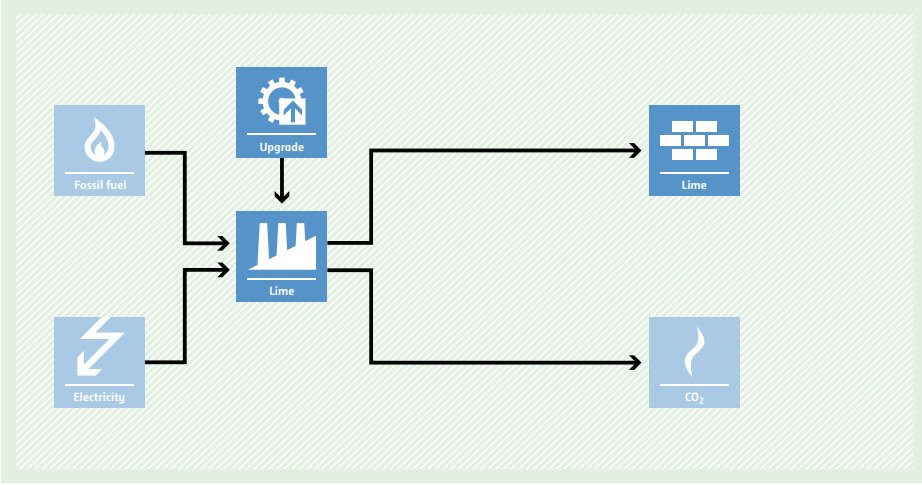
AM0104 Interconnection of electricity grids in countries with economic merit order dispatch

<p>Typical project(s)</p>	<p>Construction of one or multiple new interconnection lines to connect two grids (i.e. connection of a main grid and a previously isolated grid).</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Displacement of a more-GHG-intensive output. <p>Displacement of electricity that would be provided by more-GHG-intensive means.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> The total installed power capacity in the previously isolated grid is less than 10% of the total installed power capacity in the main grid in the year prior to the implementation of the project activity; Previously isolated grid is a grid that has no interconnection with any grid prior to the implementation of the project activity; After the implementation of the project activity, there will be only one dispatch centre responsible for the operation of the resulting grid (previously isolated and main grid).
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Grid emission factor of the previously isolated grid. <p>Monitored:</p> <ul style="list-style-type: none"> Quantity of electricity delivered to the previously isolated grid; The average quantity of SF₆ emitted from equipment installed under the project activity; Amount of electricity transferred from the previously isolated grid to the grid(s) other than the main grid.
<p>BASELINE SCENARIO No interconnection is constructed, and electricity demand of the isolated grid is met by power units connected to the isolated grid.</p>	 <p>The diagram illustrates the baseline scenario. On the left, a box labeled 'Fossil fuel' with a flame icon has an arrow pointing to a box labeled 'Power plant' with a lightning bolt icon. From the 'Power plant', an arrow points to a box labeled 'Electricity' with a lightning bolt icon. From the 'Electricity' box, an arrow points to a box labeled 'Isolated grid' with a lightning bolt icon. From the 'Power plant', another arrow points directly to a box labeled 'CO₂' with a flame icon. The entire diagram is set against a light orange background with a diagonal line pattern.</p>
<p>PROJECT SCENARIO Interconnection is constructed and electricity demand of the isolated grid is partially met by power units from the main grid.</p>	 <p>The diagram illustrates the project scenario. On the left, there are two boxes labeled 'Fossil fuel' with flame icons. The top one has an arrow pointing to a box labeled 'Power plant' with a lightning bolt icon. The bottom one has an arrow pointing to a box labeled 'Grid' with a lightning bolt icon. From the 'Power plant', an arrow points to a box labeled 'Electricity' with a lightning bolt icon. From the 'Grid', an arrow points to a box labeled 'Connected grid' with a lightning bolt icon. From the 'Electricity' box, an arrow points to the 'Connected grid' box. From the 'Power plant', another arrow points directly to a box labeled 'CO₂' with a flame icon. From the 'Grid', an arrow points directly to another box labeled 'CO₂' with a flame icon. The entire diagram is set against a light green background with a diagonal line pattern.</p>

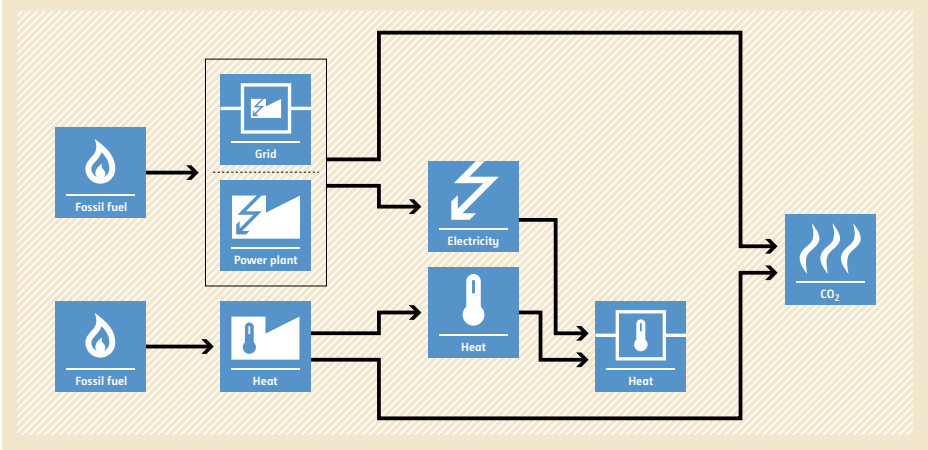
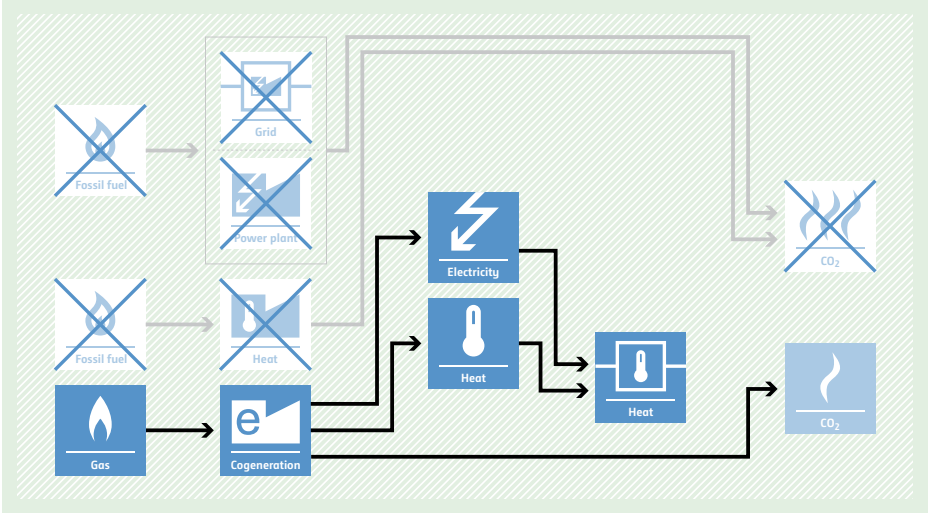
AM0105 Energy efficiency in data centres through dynamic power management

Typical project(s)	Introduction of dynamic power management (DPM) in an existing data centre.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> Energy efficiency. The data centre will consume less electricity for the operation and cooling of its servers.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> The project activity must be implemented in data centres that, prior to the implementation of the project activity, have no DPM system, no systematic method to adjust the data centre's total server capacity to actual demand, and no manual adjustment of server's operation mode to reduce electricity consumption.
Important parameters	At validation: <ul style="list-style-type: none"> Three years of historical load and operation hours information; Power consumption of the existing servers in idle mode and off mode; Transaction capacity of the existing servers; Grid emission factor (can also be monitored ex post).
	Monitored: <ul style="list-style-type: none"> Turn off time of the servers; Load of the servers; Market share of the technology.
BASELINE SCENARIO Servers of the data centre operate at "Always On" mode independent of demand.	 <p>The baseline scenario flowchart illustrates the energy flow from fossil fuel to a power plant, which feeds into the grid. Electricity from the grid is distributed to a data centre and a cooling system. The data centre and cooling system both contribute to CO2 emissions.</p>
PROJECT SCENARIO Servers of the data centre are switched to "Off Mode" when not required to process transaction load.	 <p>The project scenario flowchart shows an 'Upgrade' step leading to a more efficient data centre. This results in reduced electricity consumption from the grid, which in turn leads to lower CO2 emissions compared to the baseline scenario.</p>

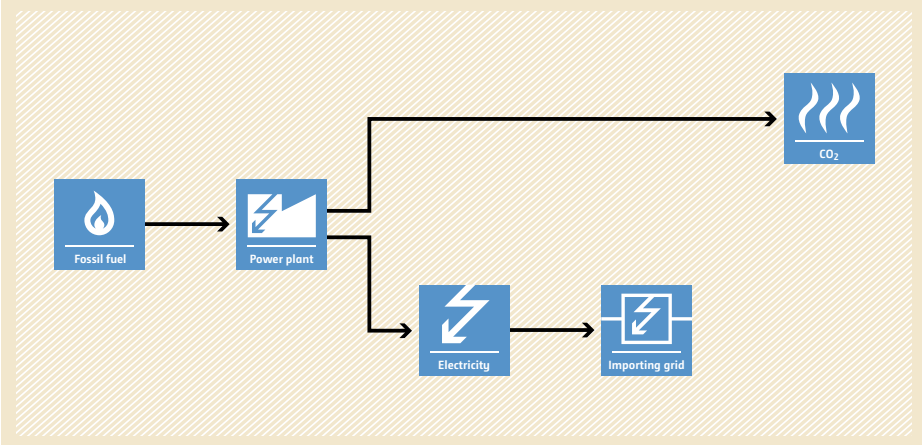
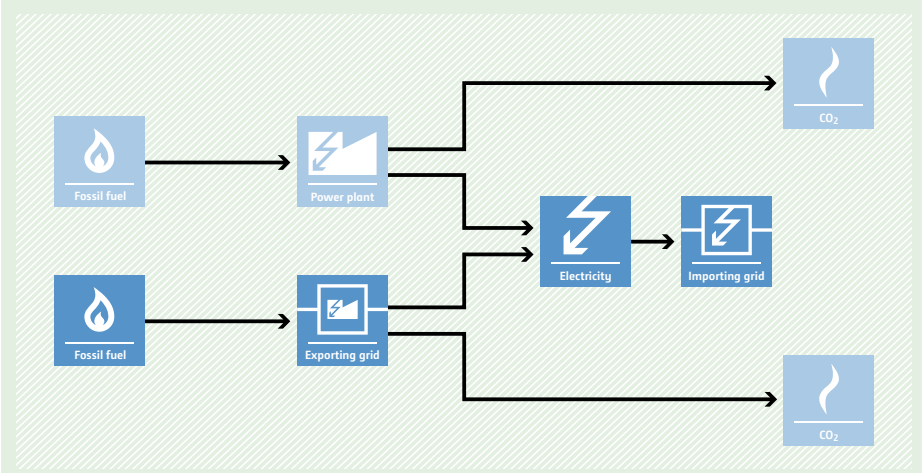
AM0106 Energy efficiency improvements of a lime production facility through installation of new kilns

<p>Typical project(s)</p>	<p>Replacement of existing kilns by new and more energy-efficient kilns in an existing lime production facility.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Production of lime using more energy-efficient technology.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The lime production facility is an existing facility and has operational history of at least three years prior to the start of the project activity; • The existing kilns and the new kilns use same fossil fuel; • The new kilns shall improve energy efficiency and not combustion efficiency; • The replaced kilns shall be decommissioned and not be used in another facility.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Amount and net calorific value of the fuel consumed prior to the start of the project activity; • Amount of electricity consumed prior to the start of the project activity; • Amount of lime produced prior to the start of the project activity. <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of used limestone; • Amount of produced lime; • Amount and CO₂ emission factor of fuel and electricity.
<p>BASELINE SCENARIO Lime production using inefficient kilns.</p>	 <p>The diagram illustrates the baseline scenario for lime production. It features a central 'Lime' production process represented by a factory icon. Two input boxes, 'Fossil fuel' (with a flame icon) and 'Electricity' (with a lightning bolt icon), have arrows pointing to the central process. From the central process, two output boxes emerge: 'Lime' (with a brick icon) and 'CO₂' (with a flame icon).</p>
<p>PROJECT SCENARIO Lime production using more energy-efficient kilns.</p>	 <p>The diagram illustrates the project scenario for lime production. It features a central 'Lime' production process represented by a factory icon. Two input boxes, 'Fossil fuel' (with a flame icon) and 'Electricity' (with a lightning bolt icon), have arrows pointing to the central process. Above the central process is an 'Upgrade' box with a gear icon, and an arrow points from it down to the factory icon. From the central process, two output boxes emerge: 'Lime' (with a brick icon) and 'CO₂' (with a flame icon).</p>

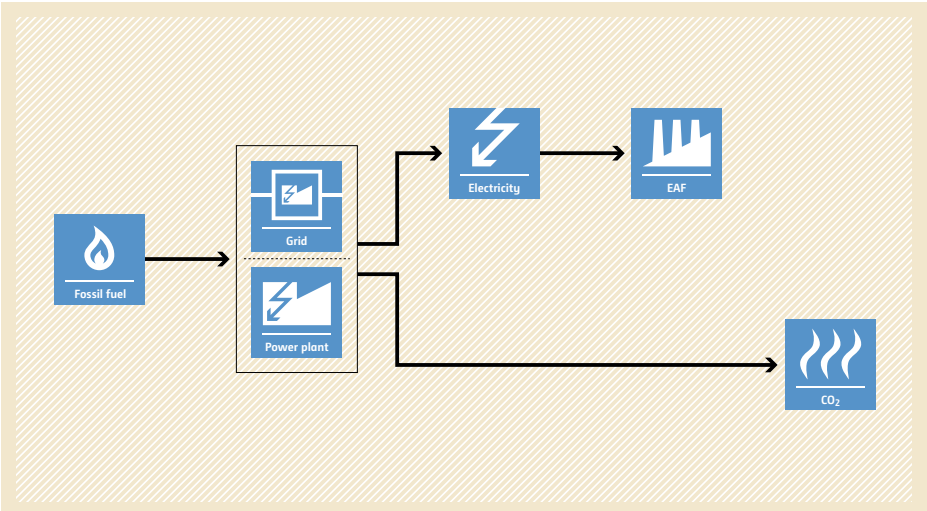
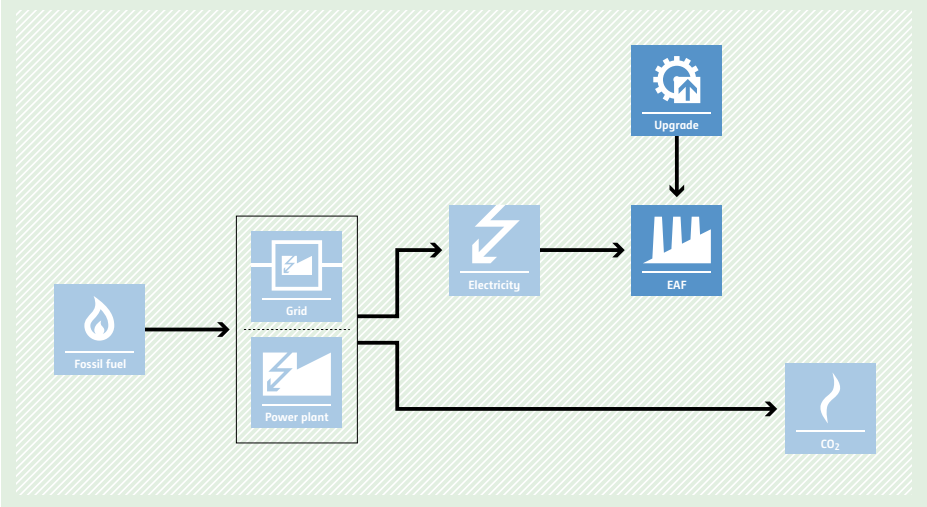
AM0107 New natural gas based cogeneration plant

<p>Typical project(s)</p>	<p>Natural gas based cogeneration project supplying heat and electricity to multiple project customers.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Fuel switch/technology switch/energy efficiency. Switch to cogeneration of steam and electricity.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> The heat-to-power ratio of the project cogeneration facility shall be higher than 0.3 during the crediting period.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Assumed efficiency of heat/electricity generation in the baseline cogeneration plant; CO₂ emission factor of the fuel that would have been used in the baseline cogeneration plant. <hr/> <p>Monitored:</p> <ul style="list-style-type: none"> Quantity of electricity generated in the project cogeneration plant; Quantity of heat supplied by the project activity; Heat supplied by the heat generation facilities within the heat network; Heat-to-power ratio of the cogeneration plant.
<p>BASELINE SCENARIO Electricity and heat would be produced by more-carbon-intensive cogeneration plant.</p>	 <p>The baseline scenario flowchart (shaded in light orange) shows two inputs of fossil fuel. The top path goes through a 'Power plant' (with a lightning bolt icon) to produce 'Electricity' (lightning bolt icon) and 'Heat' (thermometer icon). The bottom path goes through a 'Heat' unit (thermometer icon) to produce 'Heat' (thermometer icon). Both 'Electricity' and 'Heat' outputs are then directed to a final 'CO₂' emissions box (flame icon).</p>
<p>PROJECT SCENARIO Electricity and heat are produced by natural gas based cogeneration plant.</p>	 <p>The project scenario flowchart (shaded in light green) shows a 'Gas' input (flame icon) going to a 'Cogeneration' unit (with an 'e' icon). This unit produces both 'Electricity' (lightning bolt icon) and 'Heat' (thermometer icon). The 'Electricity' and 'Heat' outputs are then directed to a final 'CO₂' emissions box (flame icon). In this scenario, the fossil fuel inputs, power plant, and separate heat unit from the baseline are crossed out with large 'X' marks, indicating they are no longer used.</p>

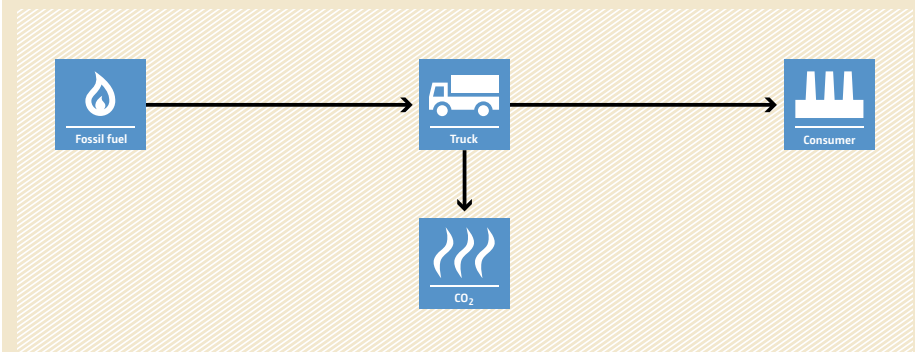
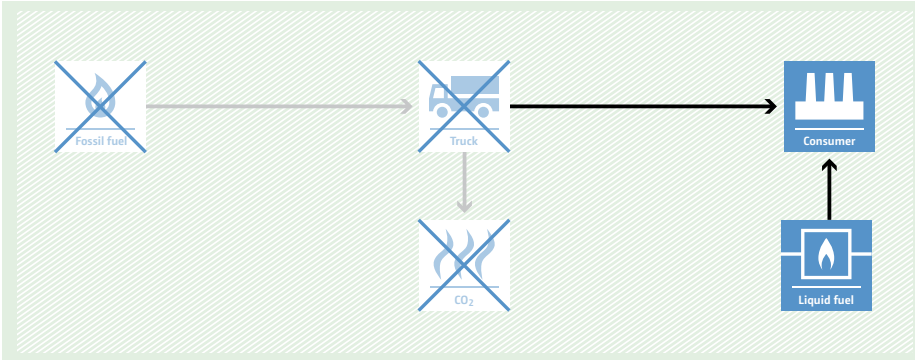
AM0108 Interconnection between electricity systems for energy exchange

<p>Typical project(s)</p>	<p>Construction of one or multiple new interconnection lines to connect two systems (grids), i.e. connection of an exporting system and an importing system.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Displacement of a more-GHG-intensive output. <p>Displacement of electricity that would be provided by more-GHG-intensive means.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> The interconnection is through the construction of new transmission lines; The relation between annual electricity flow from the exporting system to the importing system and vice versa shall not fall below 80/20; The exporting system has more than 15 % of reserve capacity during the most recent year prior to the start of the crediting period.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Historical electricity transfers between exporting, importing and third party systems (if any). <p>Monitored:</p> <ul style="list-style-type: none"> Emission factor of the exporting and importing grids; Amount of electricity transferred between exporting and importing systems; Amount of electricity imported from the third party system to the exporting system; Amount of electricity exported from the importing system to the third party system; The average quantity of SF₆ emitted from equipment installed under the project activity.
<p>BASELINE SCENARIO No interconnection is constructed, and electricity demand of the importing system is met by power units in the importing system.</p>	 <p>The diagram illustrates the baseline scenario. On the left, a 'Fossil fuel' icon (flame) points to a 'Power plant' icon (factory with lightning bolt). From the power plant, an arrow points to an 'Electricity' icon (lightning bolt). From the electricity icon, an arrow points to an 'Importing grid' icon (grid with lightning bolt). To the right of the importing grid, there is a 'CO₂' icon (flame). Above the power plant, there is another 'Fossil fuel' icon (flame) pointing to a 'CO₂' icon (flame). The entire diagram is set against a light blue background with a diagonal line pattern.</p>
<p>PROJECT SCENARIO Interconnection is constructed and electricity demand of the importing system is partially met by power units from the exporting system.</p>	 <p>The diagram illustrates the project scenario. On the left, there are two 'Fossil fuel' icons (flames). The top one points to a 'Power plant' icon (factory with lightning bolt). The bottom one points to an 'Exporting grid' icon (grid with lightning bolt). From the power plant, an arrow points to an 'Electricity' icon (lightning bolt). From the exporting grid, an arrow points to the same 'Electricity' icon. From the electricity icon, an arrow points to an 'Importing grid' icon (grid with lightning bolt). To the right of the importing grid, there are two 'CO₂' icons (flames). The entire diagram is set against a light green background with a diagonal line pattern.</p>

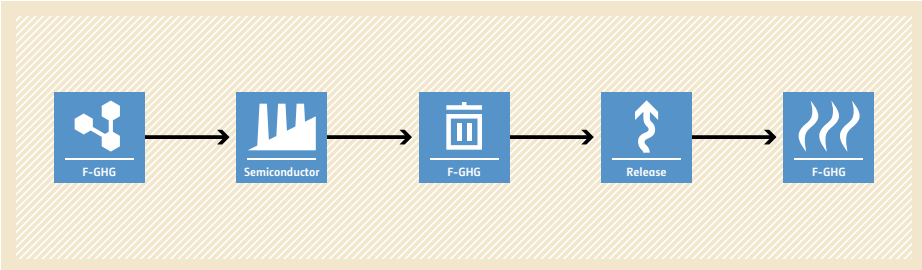
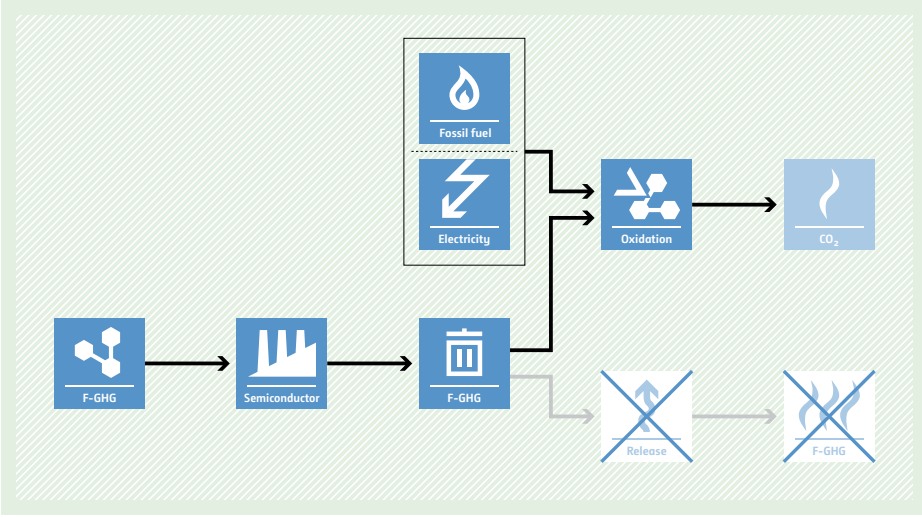
AM0109 Introduction of hot supply of direct reduced iron in electric arc furnaces

<p>Typical project(s)</p>	<p>Utilizing hot direct reduced iron (HDRI) instead of cold direct reduced iron (CDRI) as raw material in existing or new electric arc furnace/s (EAFs).</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Switch to more energy-efficient technology.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The baseline is retrievable for the project activity; • The quality of output from EAF in hot DRI charging can vary by $\pm 5\%$ from the quality of output from EAF in cold DRI charging; • The project EAF unit(s) uses DRI from an on-site direct reduced plant (DRP) as source of iron during the crediting period.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Metal production capacity of EAF. <p>Monitored:</p> <ul style="list-style-type: none"> • Electricity consumption in EAF and emission factors; • Electricity and fuel consumption in EAF charging system.
<p>BASELINE SCENARIO Due to cold DRI charging, high consumption of electricity in the electric arc furnaces results in high CO₂ emissions from the combustion of fossil fuel used to produce electricity.</p>	 <p>The diagram illustrates the baseline scenario. It starts with 'Fossil fuel' (represented by a flame icon) which is used to generate electricity through two paths: 'Grid' and 'Power plant'. The electricity generated is then fed into an 'EAF' (Electric Arc Furnace), which produces 'CO₂' emissions (represented by a flame icon).</p>
<p>PROJECT SCENARIO Due to hot DRI charging, electric arc furnaces consume less electricity, and thereby, CO₂ emissions from the combustion of fossil fuel used to produce electricity are reduced.</p>	 <p>The diagram illustrates the project scenario. It follows the same initial steps as the baseline: 'Fossil fuel' is used to generate electricity via 'Grid' and 'Power plant'. This electricity is used by an 'EAF'. However, the EAF in this scenario has an 'Upgrade' icon above it, indicating a more efficient process. This results in a significantly lower amount of 'CO₂' emissions compared to the baseline scenario.</p>

AM0110 Modal shift in transportation of liquid fuels

Typical project(s)	Transportation of liquid fuels using newly constructed pipeline.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • Energy efficiency. • Displacement of a more-carbon-intensive transportation mode.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • The pipeline network operator is the project participant; • The liquid fuel is transported using two or multiple pre-identified nodes of pipeline network; • The type of liquid fuel to be transported under the project activity is defined in the CDM-PDD at the validation of the project activity and no change of type of liquid fuel is allowed thereafter; • Operational improvements of an existing pipeline that is in operation are not applicable; • The geographic conditions of the project site permit the use of different transportation means (e.g. pipeline, trucks, etc.); • There is sufficient road transportation capacity to transport the liquid fuel by trucks at the time of implementing the CDM project activity and for the duration of the crediting period.
Important parameters	<p>At validation:</p> <ul style="list-style-type: none"> • Amount of fuel consumed by the trucks for transportation of liquid fuel in route; • Distance of the baseline route; • Amount of liquid fuel transported in trucks. <p>Monitored:</p> <ul style="list-style-type: none"> • Amount of liquid fuel transported by the pipeline.
<p>BASELINE SCENARIO Liquid fuels are transported by trucks.</p>	 <p>The diagram illustrates the baseline scenario. It shows a flow from 'Fossil fuel' (represented by a flame icon) to a 'Truck' (represented by a truck icon), which then transports the fuel to a 'Consumer' (represented by a factory icon). A downward arrow from the truck points to a 'CO₂' icon (represented by wavy lines), indicating emissions from the truck's operation.</p>
<p>PROJECT SCENARIO Liquid fuels are transported using a newly constructed pipeline.</p>	 <p>The diagram illustrates the project scenario. It shows a flow from 'Liquid fuel' (represented by a flame icon) to a 'Consumer' (represented by a factory icon). The 'Fossil fuel' and 'Truck' icons from the baseline scenario are crossed out with a large 'X', indicating they are no longer used. Similarly, the 'CO₂' icon is crossed out, indicating that emissions from the truck are eliminated. A new arrow shows the liquid fuel being transported directly to the consumer.</p>

AM0111 Abatement of fluorinated greenhouse gases in semiconductor manufacturing

<p>Typical project(s)</p>	<p>Installation of an abatement system in an existing semiconductor manufacturing facility for the abatement of fluorinated GHGs (F-GHGs) from the semiconductor etching process.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG destruction. <p>Destruction of various fluorinated GHGs (CF_4, C_2F_6, CHF_3, CH_3F, CH_2F_2, C_3F_8, $c-C_4F_8$, and SF_6).</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Existing production lines are those that do not have F-GHG-specific abatement devices before January 2012; • At least three years of historical information; • F-GHGs have been vented in the three years prior to the project activity; • No regulations mandate abatement, recycling or substitution of the project gases.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Operation conditions prior to implementation of the project activity; • Historical semiconductor production. <p>Monitored:</p> <ul style="list-style-type: none"> • Concentration of F-GHG at the inlet and outlet of the abatement system; • Flow of the gas stream at the inlet and outlet of the abatement system; • Operation conditions; • Semiconductor production; • Market share of baseline technology; • Mass of F-GHG at the inlet and outlet of the abatement system.
<p>BASELINE SCENARIO F-GHG is vented to the atmosphere after being used in the semiconductor etching process.</p>	 <p>The baseline scenario flowchart shows a linear process: F-GHG (represented by a molecule icon) is used in a Semiconductor (factory icon) facility. The resulting F-GHG (molecule icon) is then released (upward arrow icon) into the atmosphere, where it is represented as F-GHG (flame icon).</p>
<p>PROJECT SCENARIO F-GHG is recovered and destroyed in a catalytic oxidation unit (abatement system) located after the etching unit.</p>	 <p>The project scenario flowchart shows the same initial steps as the baseline: F-GHG (molecule icon) is used in a Semiconductor (factory icon) facility, resulting in F-GHG (molecule icon). However, instead of being released, the F-GHG is sent to an Oxidation unit (catalytic converter icon). This unit also receives inputs from Fossil fuel (flame icon) and Electricity (lightning bolt icon). The output of the Oxidation unit is CO₂ (flame icon). The Release (upward arrow icon) and F-GHG (flame icon) steps from the baseline scenario are crossed out with a large 'X', indicating they do not occur in the project scenario.</p>

AM0112 Less carbon intensive power generation through continuous reductive distillation of waste



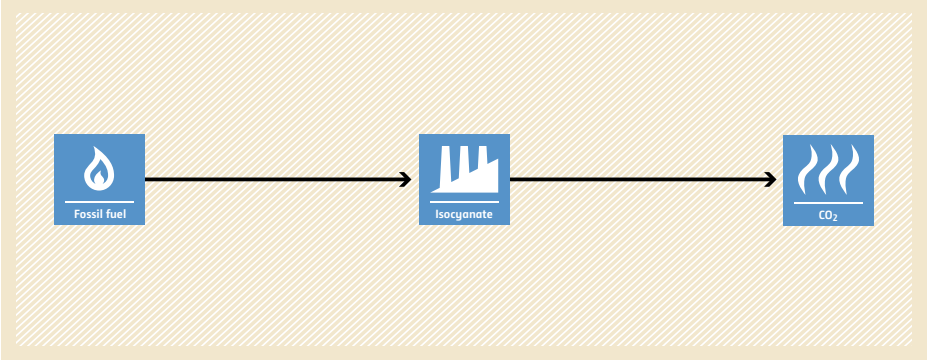
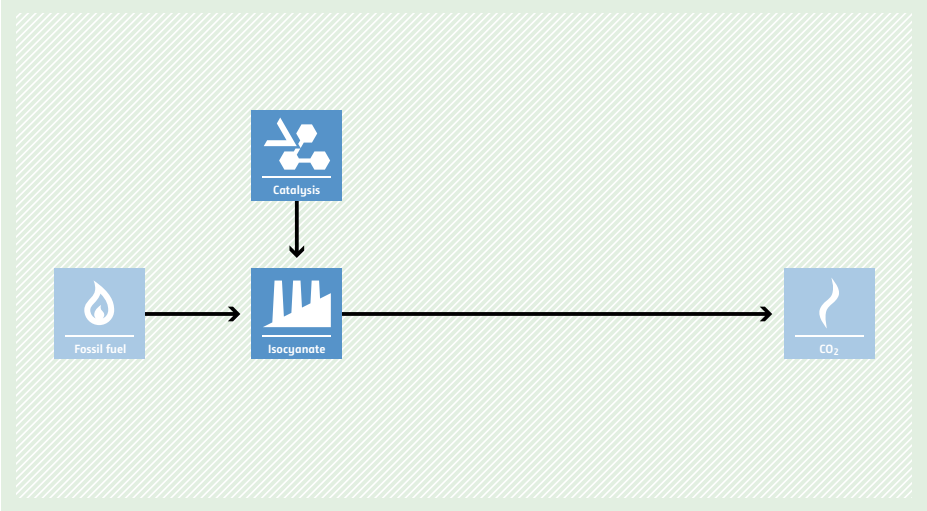
<p>Typical project(s)</p>	<p>Project activities where waste is treated by applying continuous reductive distillation (CRD) technology and resultant output gases is used for power generation. The wastes covered under this methodology are municipal solid waste (MSW), biomass residues and tyres.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG emission avoidance; • Renewable energy. <p>CH₄ emissions due to anaerobic decay of MSW and biomass residues are avoided by alternative waste treatment process. Tyres, biomass residues and MSW account for renewable energy.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project activity involves the construction of a new plant to implement CRD technology for waste treatment; • The co-products (e.g. syn gas, carbon char, emulsion fuel, fuel oil grade 2-4 etc.) of the CRD technology should be used within the project boundary; • When tyres are used as waste, only End of Life Tyres (ELT) should be used; • Neither waste nor products and by-products from the waste treatment plant established under the project activity are stored on-site under anaerobic conditions; • The project does not reduce the amount of waste that would be recycled in the absence of the project activity.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Source of end of life tyres; • Source of MSW. <p>Monitored:</p> <ul style="list-style-type: none"> • Weight fraction of the different waste types in a sample and total amount of organic waste prevented from disposal; • Stack gas analysis; • Electricity and fossil fuel consumption in the project site; • Electricity generated by the project activity.
<p>BASELINE SCENARIO Disposal of the waste in a landfill site without capturing landfill gas, electricity is generated by the grid.</p>	
<p>PROJECT SCENARIO Continuous reductive distillation technology is used to treat the waste. Electricity is generated as final product.</p>	

AM0113 Distribution of compact fluorescent lamps (CFL) and light-emitting diode (LED) lamps to households

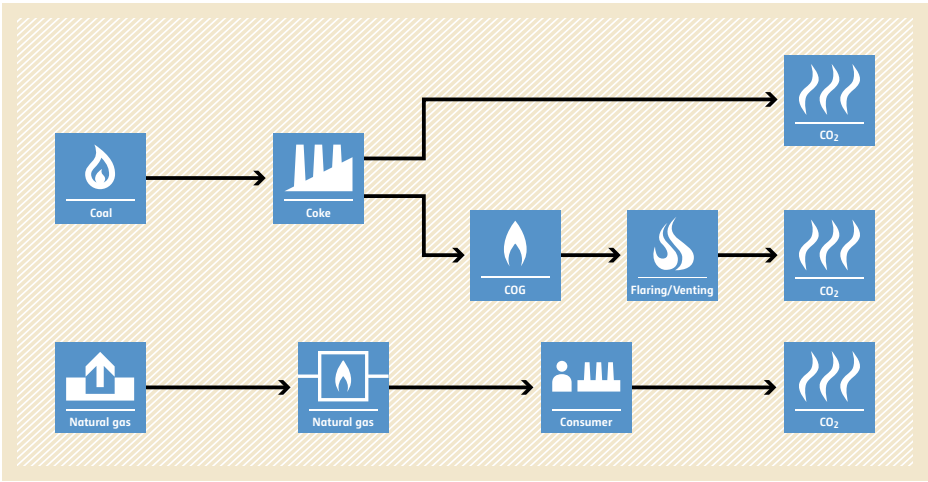
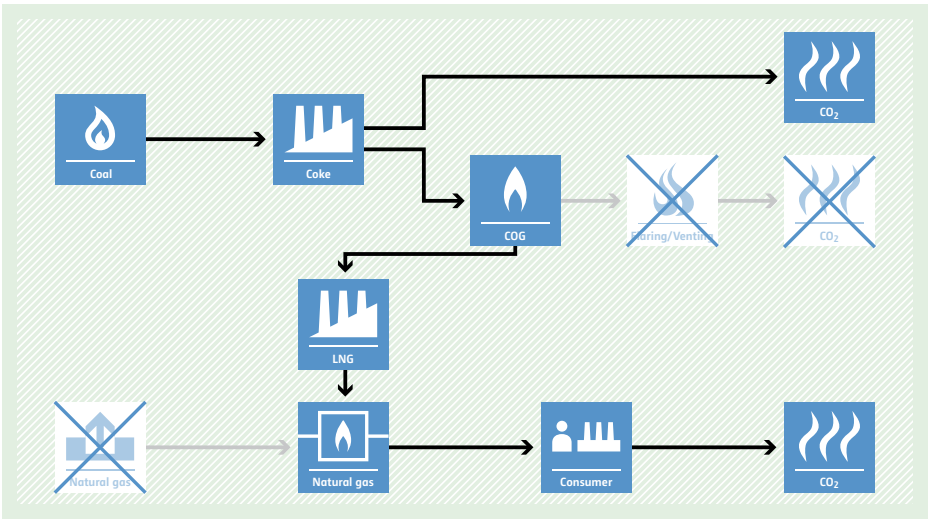


<p>Typical project(s)</p>	<p>Self-ballasted compact fluorescent lamps (CFLs) and light-emitting diode (LED) lamps are sold or distributed to households to replace less efficient lamps (e.g. incandescent lamps) in households.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Displacement of less-efficient lighting by a more-efficient technology.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Baseline lamps replaced by the project meet the national/local lighting performance standards; • Lumen output of a project lamp shall be equal to or more than that of the baseline lamp being replaced; • Project lamps shall be marked.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Rated average life of each type of project lamp.
	<p>Monitored:</p> <ul style="list-style-type: none"> • Failure rate of each type of lamp; • Scrapping/destruction of replaced baseline lamps.
<p>BASELINE SCENARIO Less-energy-efficient light bulbs are used in households resulting in higher electricity demand.</p>	
<p>PROJECT SCENARIO More-energy-efficient lamps are used in households saving electricity and thus reducing GHG emissions.</p>	

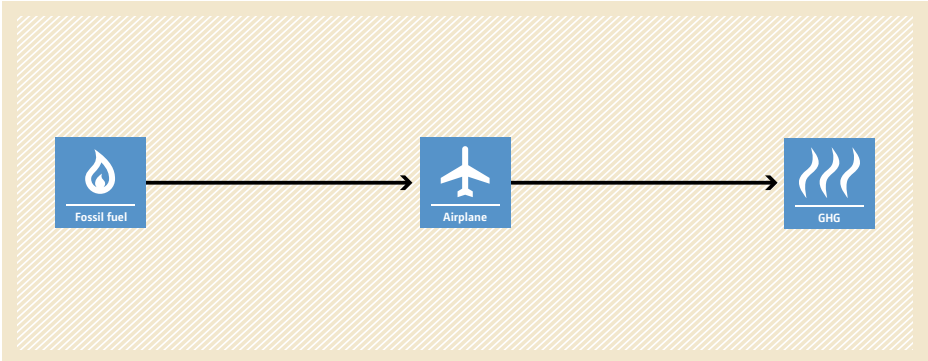
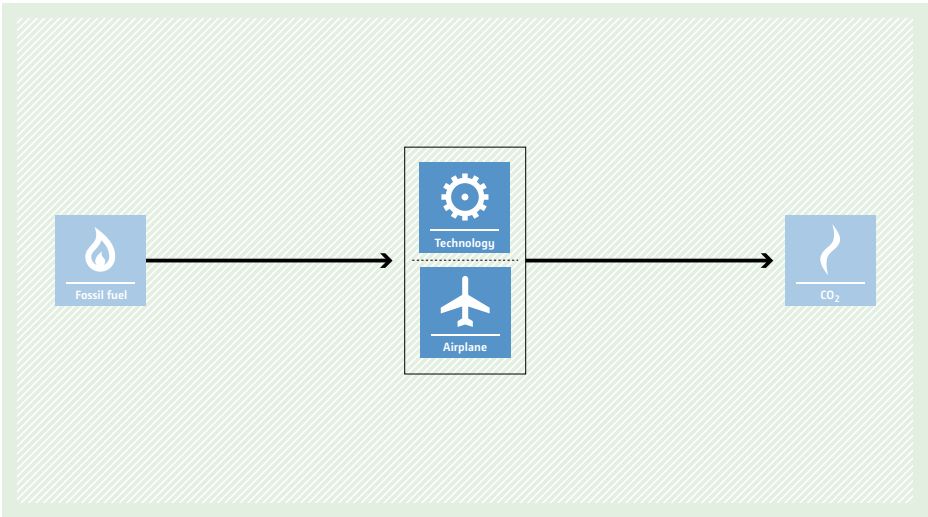
AM0114 Shift from electrolytic to catalytic process for recycling of chlorine from hydrogen chloride gas in isocyanate plants

<p>Typical project(s)</p>	<p>Project activities where electrolytic process is replaced by catalytic process for the recycling of chlorine (Cl_2) from hydrogen chloride (HCl) gas in isocyanate plant.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Reduction in electricity consumption and displacement of production of electricity by fossil fuel.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Not applicable to project activities taking place in Greenfield isocyanate plants; • The isocyanate plant, the Cl_2 plant and the electrolytic recycling facilities have operational history of at least three years prior to the starting date of the CDM project activity; • Project activities where the production ratio of HCl to isocyanate in the crediting period shall not change by more than ± 10 per cent compared to the maximum ratio of the three years of the baseline.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Amount and quality of HCl and isocyanate used in the baseline; • Amount of electricity consumed for the production of recycled Cl_2 in baseline. <p>Monitored:</p> <ul style="list-style-type: none"> • Amount and quality of HCl, Cl_2 and isocyanate in the project scenario.
<p>BASELINE SCENARIO Continuation of current practices, i.e. continued use of electrolytic process to recycle Cl_2 from the HCl gas in isocyanate plant.</p>	 <p>The baseline scenario flowchart shows a linear process. It starts with a box labeled 'Fossil fuel' with a flame icon. An arrow points to a box labeled 'Isocyanate' with a factory icon. A second arrow points to a box labeled 'CO₂' with a flame icon. The entire flowchart is set against a light orange background with a diagonal hatching pattern.</p>
<p>PROJECT SCENARIO Catalytic process for the recycling of Cl_2 from HCl gas in isocyanate plant.</p>	 <p>The project scenario flowchart shows a process where fossil fuel is used to produce isocyanate, but with an added catalytic step. It starts with a box labeled 'Fossil fuel' with a flame icon. An arrow points to a box labeled 'Isocyanate' with a factory icon. Above the 'Isocyanate' box is a box labeled 'Catalysis' with a molecular structure icon. An arrow points from 'Catalysis' down to 'Isocyanate'. A second arrow points from 'Isocyanate' to a box labeled 'CO₂' with a flame icon. The entire flowchart is set against a light green background with a diagonal hatching pattern.</p>

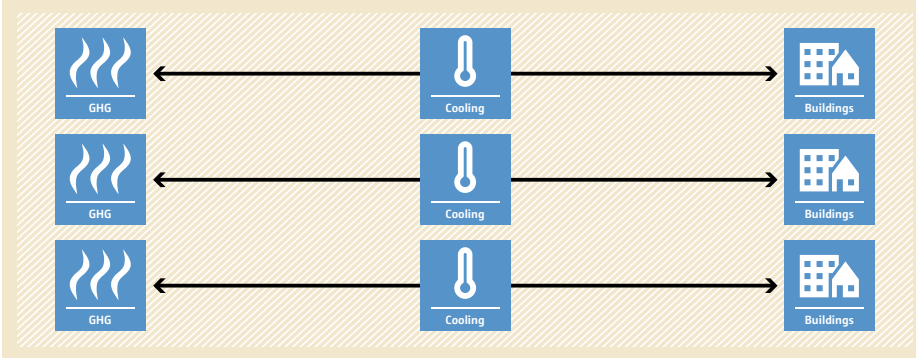
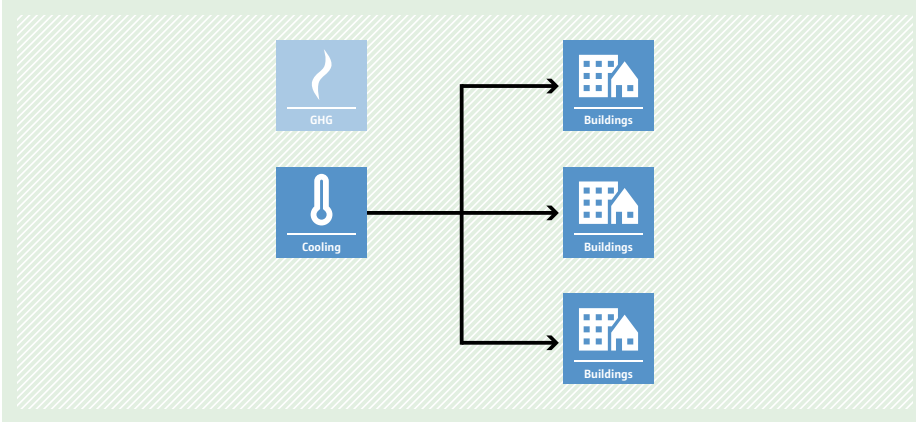
AM0115 Recovery and utilization of coke oven gas from coke plants for LNG production

<p>Typical project(s)</p>	<p>Installation of a new LNG production plant producing LNG from recovered COG in existing coke plant; and project activities where some other carbon containing waste stream (i.e. exhaust from other chemical plants) is used with COG for LNG production.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Fuel switch. <p>Reduction of GHG emissions by switching from carbon-intensive to a less-carbon-intensive fuel from waste energy.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> The COG is sourced from existing coke plant(s); The COG generated would have been flared or vented to atmosphere in the absence of the project activity.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> The historical annual amount of COG generated in the existing coke production plants and vented/flared before the proposed project. <p>Monitored:</p> <ul style="list-style-type: none"> Actual quantity of LNG produced in the project activity; The mass fraction of methane in LNG produced by the project activity.
<p>BASELINE SCENARIO COG is flared or vented to the atmosphere.</p>	 <p>The baseline scenario flowchart illustrates the process where coke oven gas (COG) is not recovered. It starts with 'Coal' being processed into 'Coke'. From the 'Coke' stage, one path leads to 'CO₂' emissions, while another path leads to 'COG'. This 'COG' is then sent to a 'Flaring/Venting' stage, which also results in 'CO₂' emissions. Simultaneously, 'Natural gas' is processed into 'Natural gas' and then sent to a 'Consumer', which also results in 'CO₂' emissions.</p>
<p>PROJECT SCENARIO COG is recovered for the production of LNG.</p>	 <p>The project scenario flowchart shows the recovery of COG for LNG production. It starts with 'Coal' being processed into 'Coke'. From 'Coke', one path leads to 'CO₂' emissions, and another path leads to 'COG'. This 'COG' is now used for 'LNG' production. The 'LNG' is then processed into 'Natural gas', which is sent to a 'Consumer', resulting in 'CO₂' emissions. The 'Flaring/Venting' stage and its associated 'CO₂' emissions are crossed out with a large 'X', indicating they are avoided in this scenario. Additionally, the 'Natural gas' input stage is also crossed out with a large 'X', indicating that natural gas is not used in this scenario.</p>

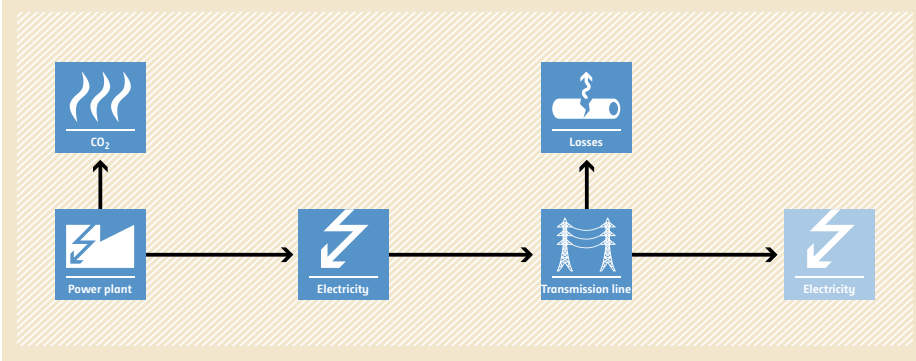
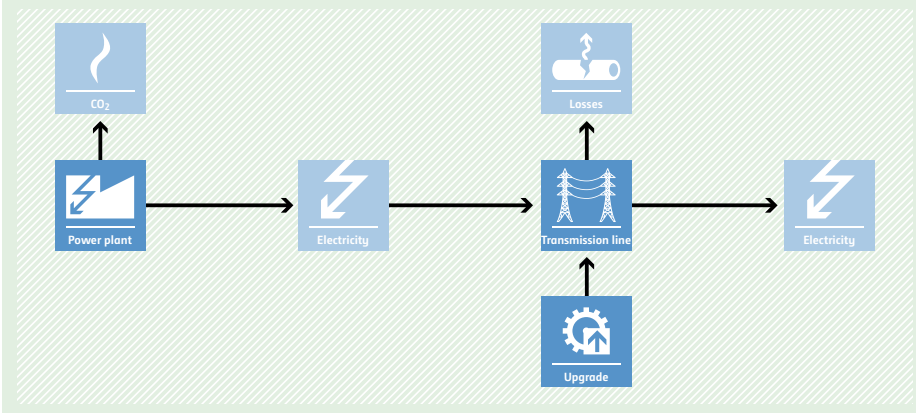
AM0116 Electric taxiing systems for airplanes

Typical project(s)	Implementation and operation of e-taxi systems in airplanes.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • Energy efficiency. Switch to energy-efficient technology.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • The percentage share of commercial airplanes operating an e-taxi system is equal to or less than 20 per cent in the total number of commercial airplanes registered in the host country.
Important parameters	At validation: <ul style="list-style-type: none"> • Specific fuel consumption by engine or APU without e-taxi during operational cycle. <hr/> Monitored: <ul style="list-style-type: none"> • Specific fuel consumption by APU with e-taxi during operational cycle; • Taxiing time during operational cycle.
BASELINE SCENARIO Use of fossil fuel as an airplane implements multi-engine taxi, single-engine with auxiliary power unit (APU) running taxi, and sometimes a mix of above. In addition, tractors are always required if the airplane needs to push backwards away from its gate.	 <p>The diagram shows a linear flow from left to right. It starts with a blue square icon containing a flame and the text 'Fossil fuel'. An arrow points to a blue square icon containing an airplane silhouette and the text 'Airplane'. A second arrow points to a blue square icon containing three wavy lines and the text 'GHG'. The entire flow is set against a light orange background with a diagonal hatching pattern.</p>
PROJECT SCENARIO Use of less fossil fuel as an airplane implements taxiing operations with e-taxi system power by APU, while main engines are switched off.	 <p>The diagram shows a linear flow from left to right. It starts with a blue square icon containing a flame and the text 'Fossil fuel'. An arrow points to a central box containing two icons: a gear labeled 'Technology' and an airplane silhouette labeled 'Airplane'. A second arrow points to a blue square icon containing a flame and the text 'CO₂'. The entire flow is set against a light green background with a diagonal hatching pattern.</p>

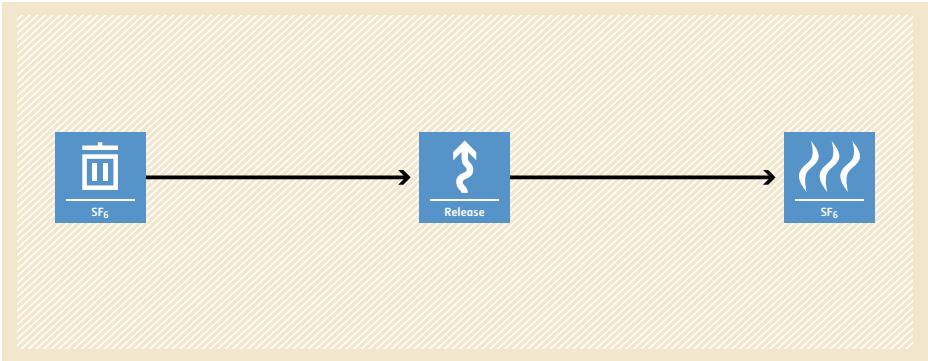
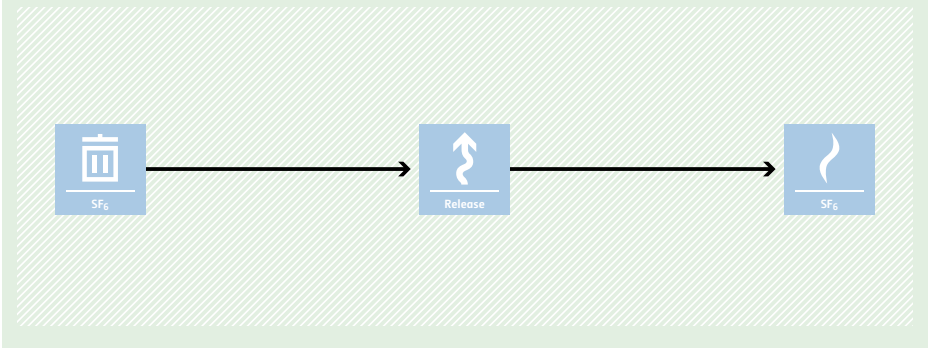
AM0117 Introduction of a new district cooling system

<p>Typical project(s)</p>	<p>Introduction of a district cooling system supplying coolant from a new cooling plant(s). It replaces baseline cooling technologies.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Reduction of energy consumption by utilization of more efficient centralized cooling technologies.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • A new district cooling system(s) supplies cooling to residential and commercial consumers through a new or existing dedicated distribution network; • A new district cooling plant(s) are added to a dedicated distribution network; • Emission reductions that are gained due to the switch of the energy sources shall not be claimed by applying this methodology alone.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Categories grouped by type of buildings (new/existing). For each category, all connected buildings should be clearly identified; • Baseline cooling technologies; • Emission factor associated with the production of freshwater; • Maximum designed quantity of freshwater to be used in the project system. <p>Monitored:</p> <p>Cooling output of new district cooling plant;</p> <ul style="list-style-type: none"> • Average flow rate (integrated over the year) of new district cooling plant; • Number of the operating hours of the new district cooling plant.
<p>BASELINE SCENARIO Baseline scenario is the continuation of the cooling energy production by the baseline cooling technologies.</p>	
<p>PROJECT SCENARIO A district cooling system supplying coolant to buildings. Less-efficient technologies are no longer in use.</p>	

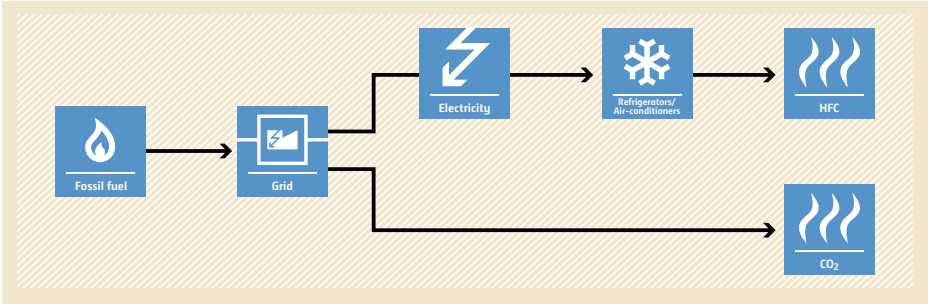
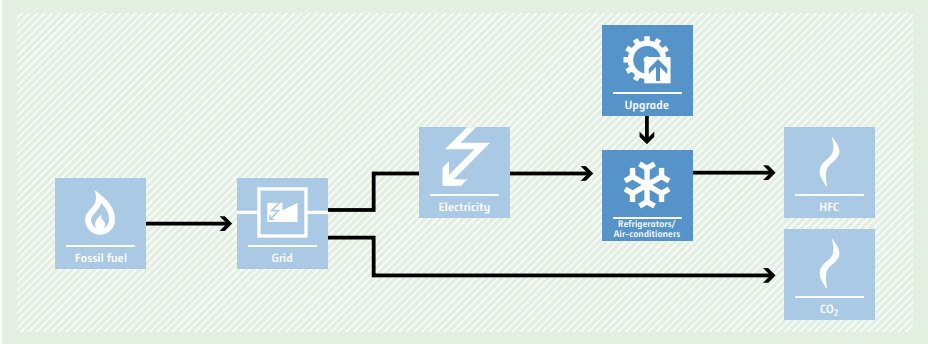
AM0118 Introduction of low resistivity power transmission line

Typical project(s)	Introduction of efficient high voltage alternating current transmission line.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • Energy efficiency. GHG mitigation through energy savings in power transmission lines.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • There should not be any branching in between the proposed project transmission line; • The project transmission line possesses the same or equivalent mechanical characteristics, such as outer diameter, nominal weight and minimum tensile strength, with a variation of no more than ± 20 per cent as compared to baseline power transmission line; • (The project transmission line should have the same transmission parameters, such as voltage level, transmission capacity, distance, power transmission technology (e.g. alternating current) as compared to the baseline system.
Important parameters	<p>At validation:</p> <ul style="list-style-type: none"> • Length of the power line in the baseline scenario; • Direct current resistance of the baseline power line; • Direct current (DC) resistance of the project power line. <p>Monitored:</p> <ul style="list-style-type: none"> • Length of the power line in the project scenario; • Emission factor of electricity system that supplies electricity to the transmission line; • Gross electricity evacuated from the point of origin/supply of the power transmission line; • Gross electricity received at the point of receipt of the power transmission line.
<p>BASELINE SCENARIO Implementation of power line based on the current trends/practices in the region or country or continuation of power transmission using existing alternating current transmission line.</p>	 <p>The diagram illustrates the baseline scenario. It shows a linear flow from left to right: a 'Power plant' icon (a lightning bolt in a square) produces 'Electricity' (a lightning bolt in a square). An arrow points from the power plant to the electricity icon. Above the power plant is a 'CO₂' icon (a flame in a square). Another arrow points from the power plant to the CO₂ icon. The electricity then flows to a 'Transmission line' icon (a tower with wires in a square). An arrow points from the electricity icon to the transmission line icon. Above the transmission line is a 'Losses' icon (a lightning bolt with a question mark in a square). An arrow points from the transmission line icon to the losses icon. Finally, an arrow points from the transmission line icon to a final 'Electricity' icon (a lightning bolt in a square).</p>
<p>PROJECT SCENARIO Implementation of power line using low resistivity cable.</p>	 <p>The diagram illustrates the project scenario. It shows a linear flow from left to right: a 'Power plant' icon (a lightning bolt in a square) produces 'Electricity' (a lightning bolt in a square). An arrow points from the power plant to the electricity icon. Above the power plant is a 'CO₂' icon (a flame in a square). Another arrow points from the power plant to the CO₂ icon. The electricity then flows to a 'Transmission line' icon (a tower with wires in a square). An arrow points from the electricity icon to the transmission line icon. Above the transmission line is a 'Losses' icon (a lightning bolt with a question mark in a square). An arrow points from the transmission line icon to the losses icon. Below the transmission line is an 'Upgrade' icon (a gear in a square). An arrow points from the upgrade icon to the transmission line icon. Finally, an arrow points from the transmission line icon to a final 'Electricity' icon (a lightning bolt in a square).</p>

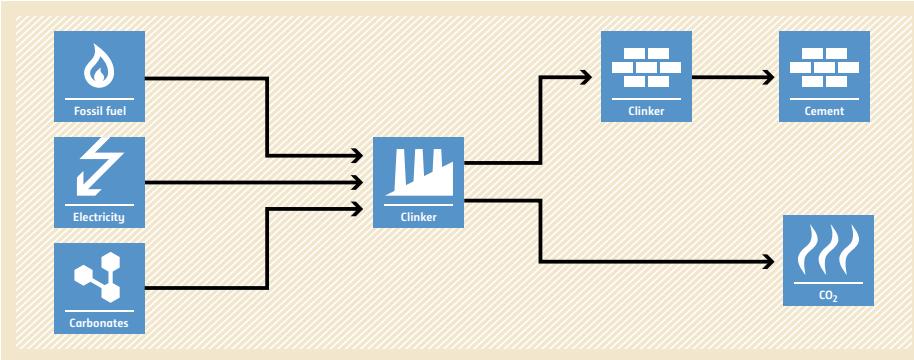
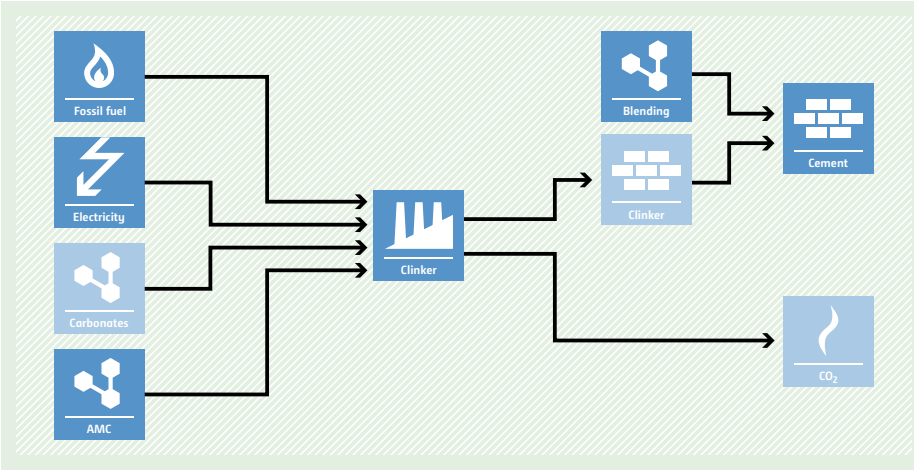
AM0119 SF₆ emission reductions in gas insulated metal enclosed switchgear

Typical project(s)	Introduction of new, or replacement of existing gas insulated switchgear(s) (GIS) with those filled with lower content of SF ₆ or SF ₆ free.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • GHG emission avoidance. Avoidance of SF ₆ fugitive emissions in switchgears.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • The project equipment shall provide the same or better functional results as the baseline equipment; • Refilling of SF₆ is required to the baseline equipment for its proper operation during its lifetime; • Residual SF₆ of both, the baseline and the project equipment, would have the same fate at the end of its lifetime (e.g. atmosphere venting); • The type of baseline GIS shall be high voltage (> 52kV), closed pressure system for gas; • Emission reductions are claimed only by the project proponent.
Important parameters	At validation: <ul style="list-style-type: none"> • SF₆ content of baseline equipment; • Annual SF₆ loss rate of the equipment; • Amount of SF₆ recharged to baseline equipment.
	Monitored: <ul style="list-style-type: none"> • Amount of SF₆ recharged to project equipment.
BASELINE SCENARIO SF ₆ that would have been recharged to the baseline equipment and emitted.	 <p>The diagram illustrates the baseline scenario for SF₆ emissions. It consists of three blue boxes connected by arrows. The first box contains a gas cylinder icon and the text 'SF₆'. An arrow points to the second box, which contains a lightning bolt icon and the text 'Release'. A second arrow points to the third box, which contains a flame icon and the text 'SF₆', representing atmospheric emission.</p>
PROJECT SCENARIO SF ₆ is reduced or avoided in SF ₆ free equipment or lower volume SF ₆ installations	 <p>The diagram illustrates the project scenario for SF₆ emissions. It follows the same structure as the baseline scenario: a blue box with a gas cylinder icon and 'SF₆', an arrow to a blue box with a lightning bolt icon and 'Release', and a final arrow to a blue box with a flame icon and 'SF₆'. However, the amount of SF₆ shown being emitted in the final box is visibly smaller than in the baseline scenario, indicating a reduction or avoidance of emissions.</p>

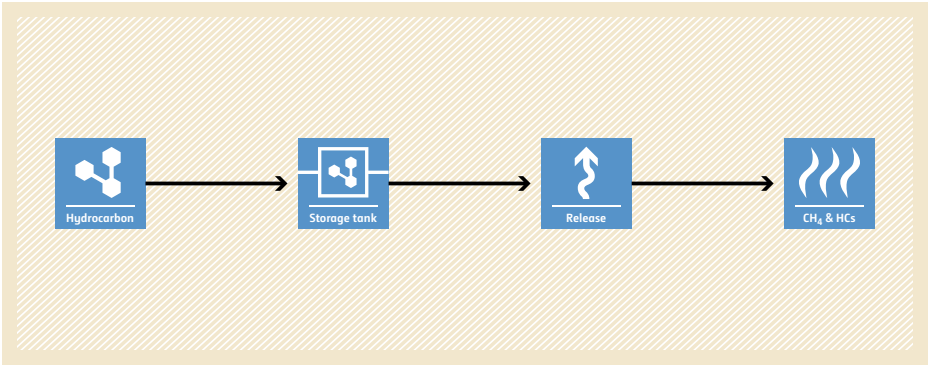
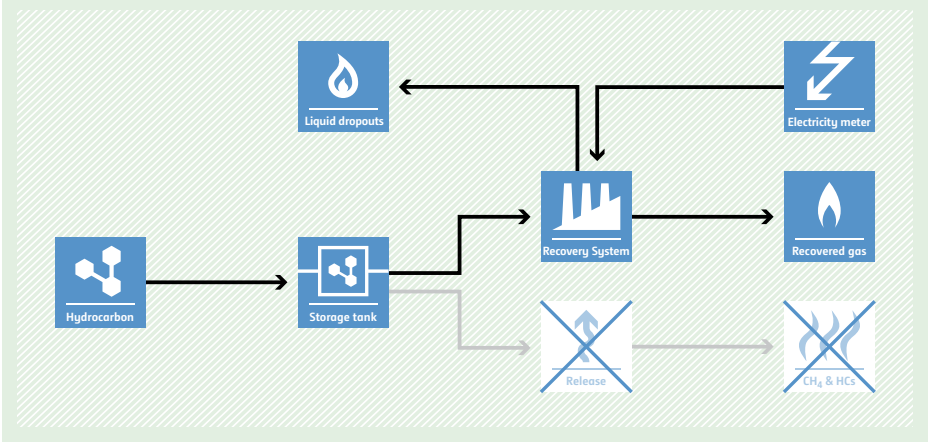
AM0120 Energy-efficient refrigerators and air-conditioners

<p>Typical project(s)</p>	<p>Installation of new energy-efficient refrigerators and air conditioners (RACs) as replacement or new sales projects.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Displacement of more-GHG-intensive service by use of more-efficient technology.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Installation of RACs is limited to residential/household applications and households are connected to a national or regional electricity grid; • Project units are Refrigerators and Air Conditioners that use refrigerants and PUR foam blowing agents with no ozone depleting potential (ODP) and low GWP (e.g. Refrigerants and blowing agents such as Hydrofluoroolefins or Hydrocarbons with GWPs<10); • Refrigerant emissions are eligible only when the penetration of air-conditioners which use refrigerants with no ODP and low GWP in the host country if the share of air conditioners using the refrigerant in question is under 20 per cent of all air conditioners.
<p>Important parameters</p>	<p>At validation:</p> <p>Depending upon the application of the options available in the methodology:</p> <ul style="list-style-type: none"> • Average remaining lifetime of the replaced refrigerators; • Emission factor of the grid; • Transmission and distribution loss; • Baseline electricity intensity factor (kWh/refrigerator/year for refrigerator and kWh/air-conditioner/cooling capacity/year for air conditioners); • Baseline Energy Efficiency Index (dimensionless) by volume class for refrigerator; • Average specific electricity consumption of the existing refrigerators in kWh/litre/y; • Specific refrigerant charge factor of baseline air-conditioners (tCO₂e/kW); • Average physical leakage rates of refrigerants in project air conditioners. <p>Monitored:</p> <ul style="list-style-type: none"> • Number of RACs by model and by volume class (in the case of refrigerators only) introduced by the project activity operating in year y; • Average volume of refrigerators by volume class introduced in year y; • Cooling capacity of the project air conditioners by model type (kW).
<p>BASILINE SCENARIO</p> <p>For project activities involving replacement of existing RAC units, the baseline scenario is the continuing operation of the existing units. For new installation, the baseline is the performance benchmark established using top 10% or 20% threshold in terms of annual electricity consumption (kWh/yr).</p>	
<p>PROJECT SCENARIO</p> <p>Installation of new, energy-efficient refrigerators and air conditioners (RACs) for residential/household applications as replacement or new sales projects.</p>	

AM0121 Emission reduction from partial switching of raw materials and increasing the share of additives in the production of blended cement

<p>Typical project(s)</p>	<p>Partial or full switch to alternative raw materials that do not contain carbonates (AMC) in the production of clinker in cement kilns and production of blended cement (BC) beyond current practices in the host country.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Type of mitigation action: Avoidance of CO₂ emissions by switching to carbonate free feedstock in the production of clinker and blending cement (BC) beyond current practices in the host country.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> The quality of the produced clinker is not reduced, as compared to the baseline scenario; Applicable to domestically sold blended cement; No alternative raw materials have been used prior to the implementation of the project activity (except for any test trials not exceeding 90 days).
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Clinker ratio at the project plant, clinker ratio at other plants in the region; Emission factors for electricity and fossil fuels; Quality of produced clinker/blended cement produced. <p>Monitored:</p> <ul style="list-style-type: none"> Cement and clinker production; Use of raw materials and additives; Use of electricity and fossil fuels.
<p>BASELINE SCENARIO Use of raw materials that contain calcium and/or magnesium carbonates (e.g. limestone) to produce clinker. Production of blended cement (BC) as per current practices in the host country.</p>	 <p>The diagram illustrates the baseline production process. It starts with three input boxes: 'Fossil fuel' (flame icon), 'Electricity' (lightning bolt icon), and 'Carbonates' (molecular structure icon). Arrows from these three boxes point to a central 'Clinker' box (factory icon). From the 'Clinker' box, two arrows emerge: one points to a 'Clinker' box (brick icon) and the other points to a 'CO₂' box (flame icon). From the 'Clinker' box (brick icon), two arrows emerge: one points to a 'Cement' box (brick icon) and the other points to a 'Blending' box (brick icon). From the 'Blending' box, an arrow points to a 'Cement' box (brick icon).</p>
<p>PROJECT SCENARIO Switch to alternative raw materials that do not contain carbonates (AMC) in the production of clinker. Production of blended cement (BC) beyond current practices in the host country.</p>	 <p>The diagram illustrates the project scenario production process. It starts with four input boxes: 'Fossil fuel' (flame icon), 'Electricity' (lightning bolt icon), 'Carbonates' (molecular structure icon), and 'AMC' (molecular structure icon). Arrows from the first three boxes point to a central 'Clinker' box (factory icon). From the 'Clinker' box, two arrows emerge: one points to a 'Clinker' box (brick icon) and the other points to a 'CO₂' box (flame icon). From the 'Clinker' box (brick icon), two arrows emerge: one points to a 'Cement' box (brick icon) and the other points to a 'Blending' box (brick icon). From the 'Blending' box, an arrow points to a 'Cement' box (brick icon).</p>

AM0122 Recovery of methane-rich vapours from hydrocarbon storage tanks

<p>Typical project(s)</p>	<p>Project activities that recover the methane-rich vapours that were previously vented into the atmosphere from the hydrocarbon storage tanks located within existing oil production facilities, oil and gas pre-treatment facilities, gas processing plants, oil treatment facilities, and liquid hydrocarbon storage tanks and loading stations. The recovered methane may be flared or utilized to generate energy.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Type of mitigation action: GHG destruction – combustion of methane.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> In the absence of the project activity, the methane-containing vapour is vented into the atmosphere; The hydrocarbon facilities must have started operating prior to 31 December 2020; Stabilization containers are not eligible under this methodology; The pressure and temperature of the last stage of separation from which the liquids are sent to the project storage tanks remain the same before and after the project implementation; For projects implemented in oil production facilities, the associated gas has been separated from the oil stream prior to entering the storage facilities (hydrocarbon storage tanks).
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Pressure and temperature in separator. <p>Monitored:</p> <ul style="list-style-type: none"> Quantity of recovered methane; Quantity of electricity and fossil fuels consumed by the project activity; Pressure and temperature in separator.
<p>BASELINE SCENARIO The baseline scenario comprises the emission of methane-rich vapours from hydrocarbon storage tanks included as part of the project activity.</p>	 <p>The baseline scenario flowchart shows a linear process starting with 'Hydrocarbon' (represented by a molecular structure icon), which flows into a 'Storage tank' (represented by a tank icon). From the storage tank, the vapour is released ('Release' icon), and finally, it is emitted as 'CH₄ & HCs' (represented by a flame icon).</p>
<p>PROJECT SCENARIO Under the project activity, the previously vented methane-rich vapour is recovered and utilized through combustion.</p>	 <p>The project scenario flowchart shows 'Hydrocarbon' entering a 'Storage tank'. From the storage tank, the vapour goes to a 'Recovery System' (represented by a factory icon). The recovery system produces 'Recovered gas' (flame icon) and 'Liquid dropouts' (flame icon). The recovered gas is shown being flared, with a crossed-out 'Release' icon and a crossed-out 'CH₄ & HCs' icon. An 'Electricity meter' icon is also shown, indicating energy recovery. The 'Release' and 'CH₄ & HCs' paths are crossed out with a large 'X'.</p>





ACM0001 Flaring or use of landfill gas

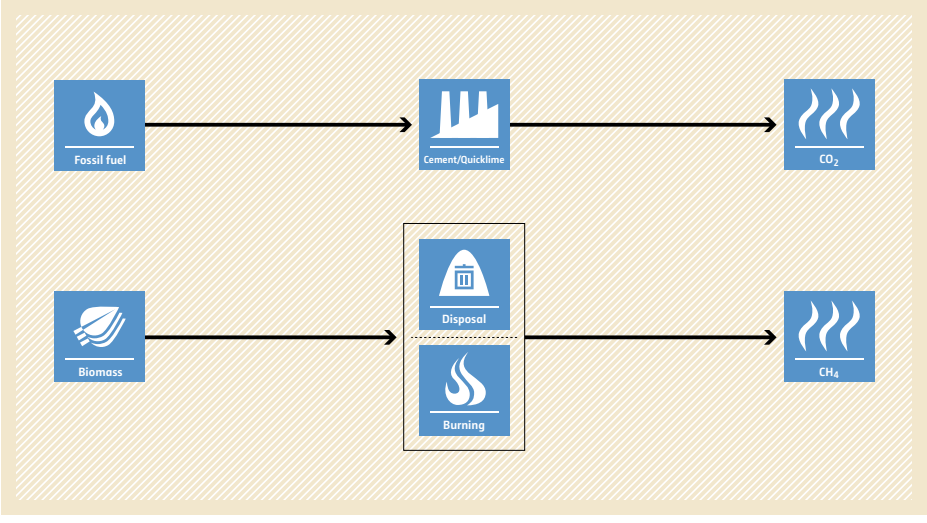
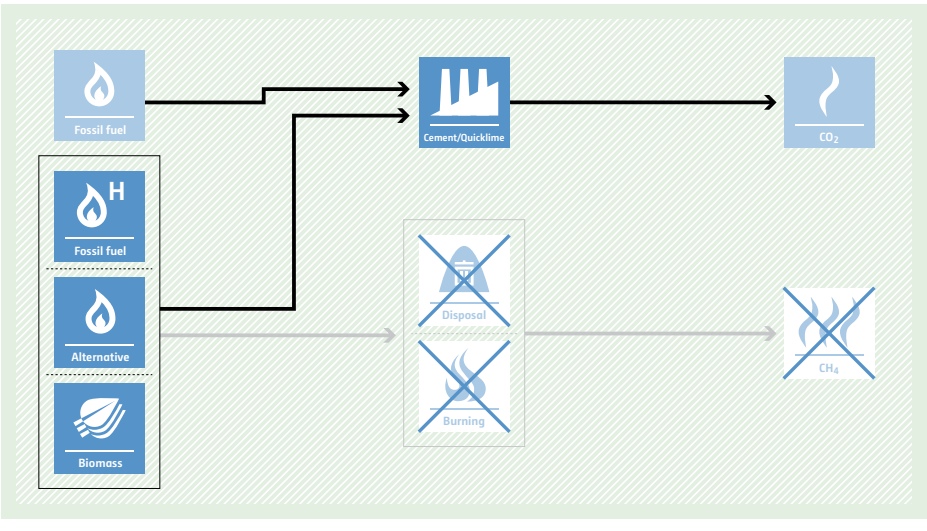
<p>Typical project(s)</p>	<p>Capture of landfill gas (LFG) and its flaring and/or use to produce energy and/or use to supply consumers through natural gas distribution network or trucks.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG destruction. <p>Destruction of methane emissions and displacement of a more-GHG-intensive service.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Captured landfill gas is flared, and/or; • Captured landfill gas is used to produce energy, and or; • Captured gas is used to supply consumers through natural gas distribution network, trucks or the dedicated pipeline.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Amount of landfill gas captured; • Methane fraction in the landfill gas; • If applicable: electricity generation using landfill gas.
<p>BASELINE SCENARIO LFG from the landfill site is released to the atmosphere.</p>	<p>The baseline scenario flowchart shows a linear process starting with 'Waste' (represented by a trash can icon), followed by 'Disposal' (represented by a landfill icon), then 'Landfill gas' (represented by a flame icon), then 'Release' (represented by an upward arrow icon), and finally 'CH4' (represented by a flame icon with the chemical formula).</p>
<p>PROJECT SCENARIO LFG from the landfill site is captured and flared; and/or used to produce energy (e.g. electricity/thermal energy); and/or used to supply consumers through natural gas distribution network, trucks or the dedicated pipeline.</p>	<p>The project scenario flowchart shows the same initial steps as the baseline: 'Waste' (trash can icon), 'Disposal' (landfill icon), and 'Landfill gas' (flame icon). From the 'Landfill gas' step, the flow splits into two paths. The upper path leads to a box containing three options: 'Flaring' (flame icon), 'Energy' (e icon), and 'Natural gas' (flame icon in a box). The lower path leads to 'Release' (upward arrow icon) and 'CH4' (flame icon), both of which are crossed out with a large blue 'X', indicating that these emissions are avoided in the project scenario.</p>

ACM0002 Grid-connected electricity generation from renewable sources

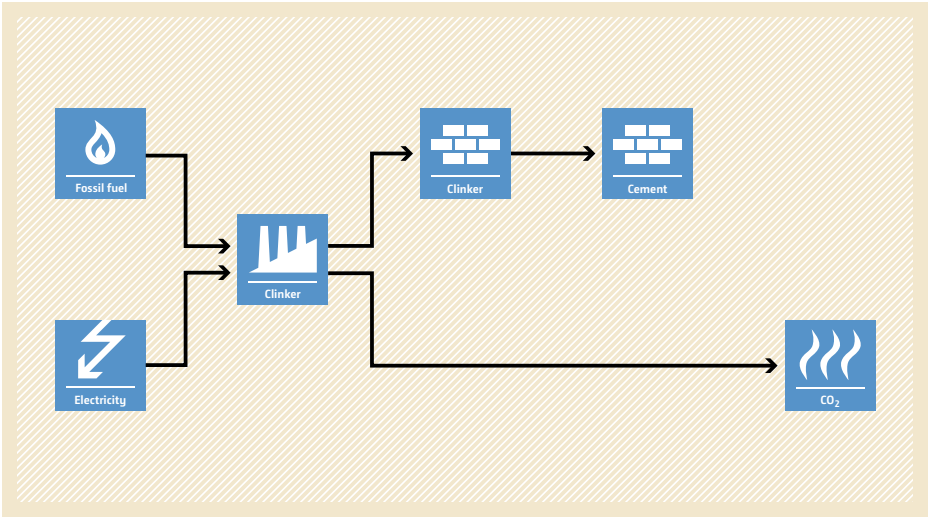
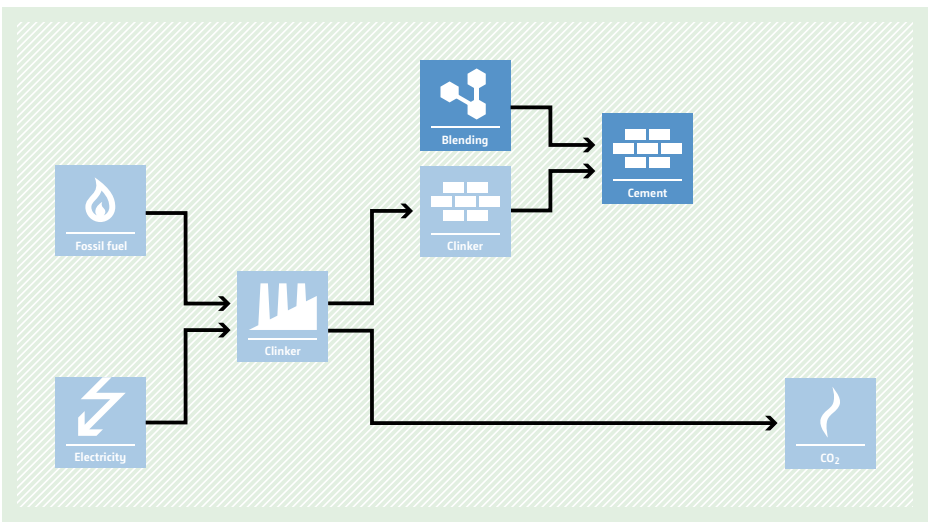


<p>Typical project(s)</p>	<p>Retrofit, rehabilitation (or refurbishment), replacement or capacity addition of an existing power plant or construction and operation of a new power plant/unit that uses renewable energy sources and supplies electricity to the grid. Battery energy storage system can be integrated under certain conditions.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy. <p>Displacement of electricity that would be provided to the grid by more-GHG-intensive means.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project power plant is using one of the following sources: hydro, wind, geothermal, solar, wave or tidal power. Biomass-fired power plants are not applicable; • In the case of capacity additions, retrofits, rehabilitation or replacements, the existing power plant started commercial operation prior to the start of a minimum historical reference period of five years, and no capacity expansion or retrofit, rehabilitation or replacement of the plant has been undertaken between the start of this minimum historical reference period and the implementation of the project; • In case of hydro power: <ul style="list-style-type: none"> – The project has to be implemented in an existing reservoir, with no change in the volume of reservoir; – The project has to be implemented in an existing reservoir, where the volume of reservoir is increased and the power density is greater than 4 W/m²; – The project results in new reservoirs and the power density is greater than 4 W/m²; or – The project activity is an integrated hydro power project involving multiple reservoirs; • Integration with a Battery Energy Storage System is possible for a Greenfield renewable energy generation technology or an existing solar photovoltaic or wind power plant.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Grid emission factor (can also be monitored ex post). <p>Monitored:</p> <ul style="list-style-type: none"> • Electricity supplied to the grid by the project; • If applicable: methane emissions of the project.
<p>BASELINE SCENARIO Electricity provided to the grid by more-GHG-intensive means.</p>	<pre> graph LR FF[Fossil fuel] --> G[Grid] G --> E1[Electricity] G --> E2[Electricity] G --> CO2[CO2] E1 --> E3[Electricity] E2 --> E3 E3 --> CO2 </pre>
<p>PROJECT SCENARIO Displacement of electricity provided to the grid by more-GHG-intensive means by installation of a new renewable power plant or the retrofit, replacement or capacity addition of an existing renewable power plant.</p>	<pre> graph LR FF[Fossil fuel] --> G[Grid] R[Renewable] --> G G --> E1[Electricity] G --> E2[Electricity] G --> CO2[CO2] E1 --> E3[Electricity] E2 --> E3 E3 --> CO2 </pre>

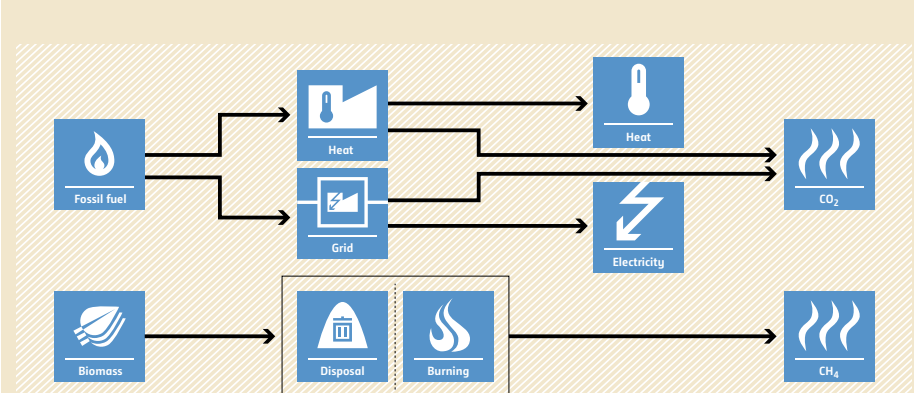
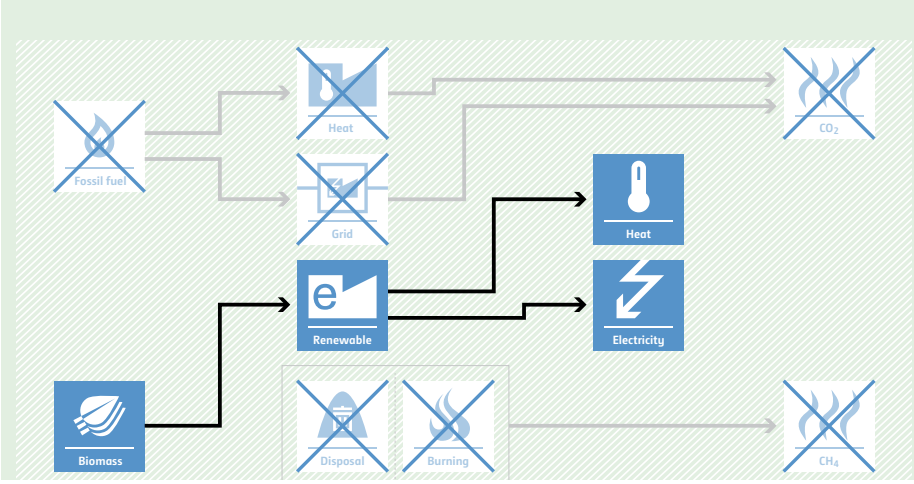
ACM0003 Partial substitution of fossil fuels in cement or quicklime manufacture

<p>Typical project(s)</p>	<p>Partial replacement of fossil fuels in an existing clinker or quicklime production facility by less-carbon-intensive fossil fuel or alternative fuel (e.g. wastes or biomass residues).</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Fuel switch; • Renewable energy. <p>Reduction of GHG emissions by switching from carbon-intensive fuel to less-carbon-intensive or alternative fuel; GHG emission avoidance by preventing disposal or uncontrolled burning of biomass residues.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • No alternative fuels have been used in the project facility during the last three years prior to the start of the project; • The biomass to be combusted should not have been processed chemically; • For biomass from dedicated plantations, specific conditions apply.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity and net calorific value of alternative fuel and/or less-carbon-intensive fossil fuel used in the project plant; • Quantity of clinker or quicklime produced.
<p>BASELINE SCENARIO Clinker or quicklime is produced using more-carbon-intensive fuel and/or decay or uncontrolled burning of biomass leads to CH₄ emissions.</p>	 <p>The baseline scenario flowchart illustrates the production process. On the left, 'Fossil fuel' (represented by a flame icon) and 'Biomass' (represented by a leaf icon) are inputs. Arrows from 'Fossil fuel' and 'Biomass' point to a central box labeled 'Cement/Quicklime' (represented by a factory icon). From this central box, an arrow points to a 'CO₂' emission icon (represented by three wavy lines). Below the central box, there is a sub-process box containing 'Disposal' (represented by a trash can icon) and 'Burning' (represented by a flame icon). An arrow from 'Biomass' points to this sub-process box. From the sub-process box, an arrow points to a 'CH₄' emission icon (represented by a flame icon).</p>
<p>PROJECT SCENARIO Clinker or quicklime is produced using less-carbon-intensive fuel and/or alternative fuel and/or biomass is combusted.</p>	 <p>The project scenario flowchart illustrates the modified production process. On the left, 'Fossil fuel' (flame icon), 'Fossil fuel H' (flame icon with 'H'), 'Alternative' (flame icon), and 'Biomass' (leaf icon) are inputs. Arrows from 'Fossil fuel', 'Fossil fuel H', and 'Alternative' point to a central box labeled 'Cement/Quicklime' (factory icon). An arrow from 'Biomass' points to a sub-process box containing 'Disposal' (trash can icon) and 'Burning' (flame icon). This sub-process box is crossed out with a large 'X'. From the 'Cement/Quicklime' box, an arrow points to a 'CO₂' emission icon (wavy lines). From the crossed-out sub-process box, an arrow points to a crossed-out 'CH₄' emission icon (flame icon).</p>

ACM0005 Increasing the blend in cement production

<p>Typical project(s)</p>	<p>Use of blending material (e.g. fly ash, gypsum, slag) to decrease the share of clinker in cement.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Feedstock switch. <p>CO₂ emissions from clinker production are avoided due to less use of clinker.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Applicable to domestically sold blended cement; • Not applicable if blending of cement outside the cement production plant is common in the host country; • Not applicable for grinding only plants.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Clinker ratio at the project plant, clinker ratio at all other plants in the region and in the five highest blended cement brands in the region; • Electricity emission factor. <p>Monitored:</p> <ul style="list-style-type: none"> • Cement and clinker production; • Raw materials, electricity demand and fuel use in the production of clinker; • Clinker and additives use in the production of cement.
<p>BASILINE SCENARIO Available blending material is not used. Cement is produced with high clinker content, leading to high CO₂ emissions.</p>	
<p>PROJECT SCENARIO Available blending material is used in cement to partially replace clinker. Thereby CO₂ emissions from clinker production are avoided.</p>	

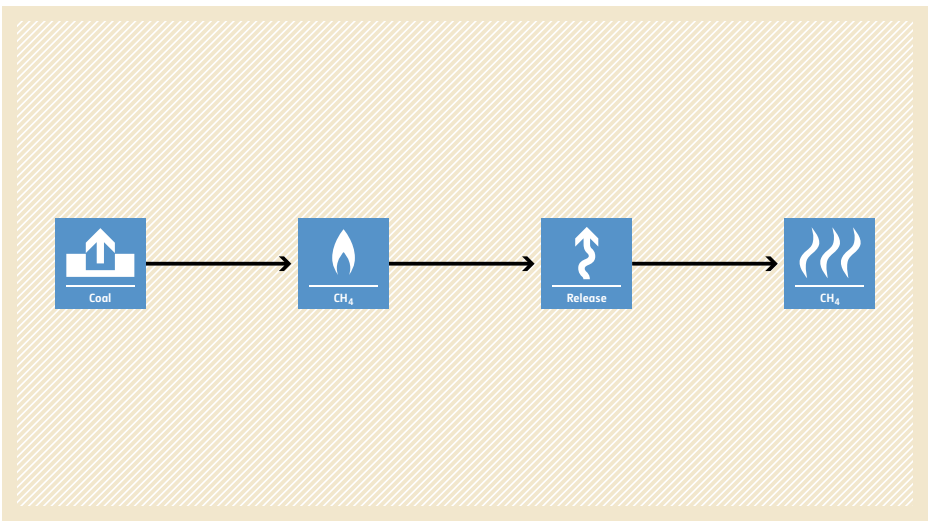
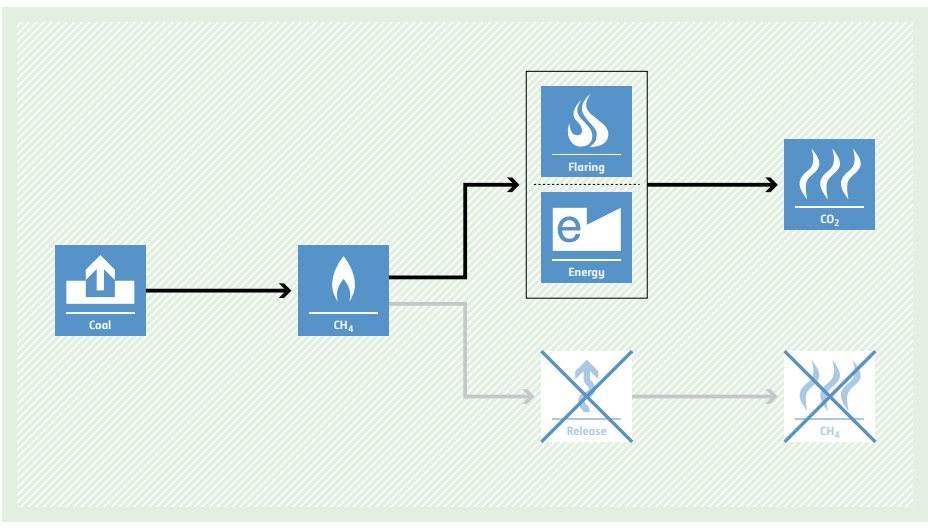
ACM0006 Electricity and heat generation from biomass

<p>Typical project(s)</p>	<p>Generation of power and heat in thermal power plants, including cogeneration plants using biomass. Typical activities are new plant, capacity expansion, energy efficiency improvements or fuel switch projects.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy; • Energy efficiency; • Fuel switch; • GHG emission avoidance. <p>Displacement of more-GHG-intensive electricity generation in grid or heat and electricity generation on-site. Avoidance of methane emissions from anaerobic decay of biomass residues.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Only power and heat or cogeneration plants are applicable; • Only biomass residues, biogas and biomass from dedicated plantations are eligible; • Fossil fuels may be co-fired in the project plant. The amount of fossil fuels co-fired shall not exceed 80% of the total fuel fired on an energy basis; • Planted biomass is eligible if specific conditions elaborated in "Project and leakage emissions from biomass" are met.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Grid emission factor (can also be monitored ex post). <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity and moisture content of the biomass used in the project activity; • Electricity and heat generated in the project activity; • Electricity and, if applicable, fossil fuel consumption of the project activity.
<p>BASELINE SCENARIO Electricity and heat would be produced by more-carbon-intensive technologies based on fossil fuel or less-efficient biomass power and heat plants. Biomass could partly decay under anaerobic conditions, bringing about methane emissions.</p>	 <p>The diagram illustrates the baseline scenario. It shows two input boxes: 'Fossil fuel' and 'Biomass'. 'Fossil fuel' feeds into 'Heat' and 'Grid' boxes. 'Biomass' feeds into 'Disposal' and 'Burning' boxes. 'Heat' and 'Grid' both feed into a 'Heat' box and an 'Electricity' box. 'Disposal' and 'Burning' both feed into a 'CH4' box. 'Heat' and 'Electricity' both feed into a 'CO2' box. The 'Disposal' and 'Burning' boxes are crossed out with a blue 'X'.</p>
<p>PROJECT SCENARIO Use of biomass for power and heat generation instead of fossil fuel or increase of the efficiency of biomass-fuelled power and heat plants. Biomass is used as fuel and decay of biomass is avoided.</p>	 <p>The diagram illustrates the project scenario. It shows two input boxes: 'Fossil fuel' and 'Biomass'. 'Fossil fuel' feeds into 'Heat' and 'Grid' boxes. 'Biomass' feeds into a 'Renewable' box. 'Heat' and 'Grid' both feed into a 'Heat' box and an 'Electricity' box. 'Renewable' feeds into the 'Heat' and 'Electricity' boxes. 'Disposal' and 'Burning' boxes are crossed out with a blue 'X'. 'CH4' and 'CO2' boxes are also crossed out with a blue 'X'.</p>

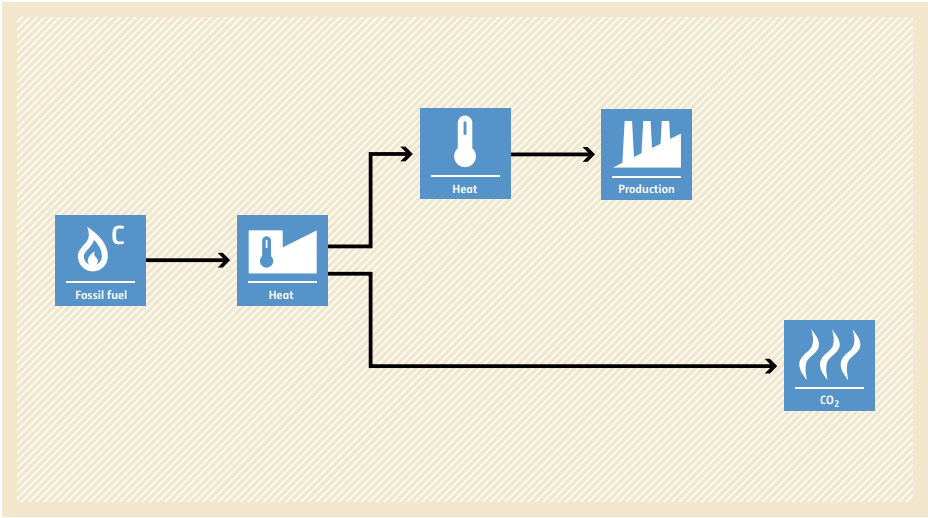
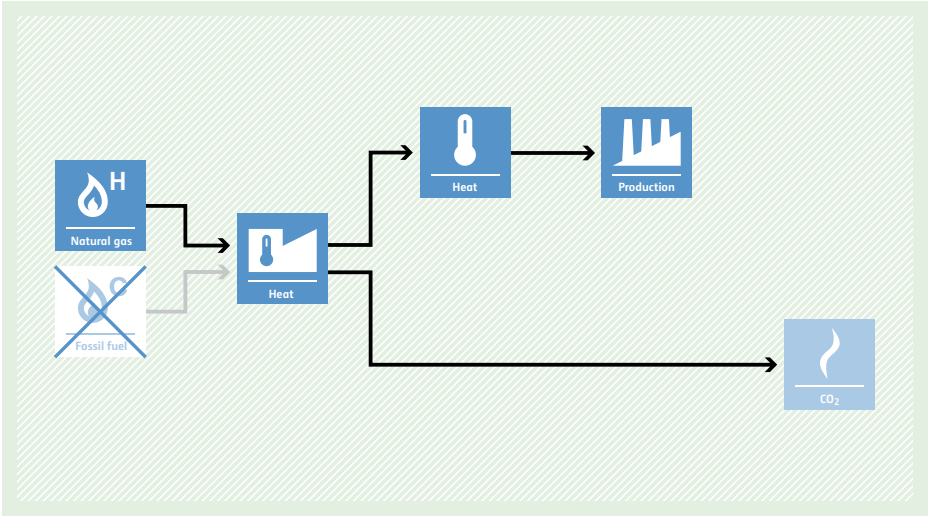
ACM0007 Conversion from single cycle to combined cycle power generation

Typical project(s)	Conversion from an open-cycle gas power plant to a combined-cycle gas power plant.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • Energy efficiency. • Fuel savings through energy efficiency improvement.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • The project does not increase the lifetime of the existing gas turbine or engine during the crediting period; • Waste heat generated on the project site is not utilizable for any other purpose.
Important parameters	<p>At validation:</p> <ul style="list-style-type: none"> • Electricity generation of the existing open-cycle gas power plant (can also be monitored ex post); • Fuel consumption of the existing open-cycle gas power plant. <hr/> <p>Monitored:</p> <ul style="list-style-type: none"> • Electricity generation of the combined-cycle gas power plant; • Fuel consumption of the combined-cycle gas power plant; • Grid emission factor.
BASELINE SCENARIO Electricity is generated by an open-cycle gas power plant.	
PROJECT SCENARIO The open-cycle gas power plant is converted to a combined-cycle one for more-efficient power generation.	

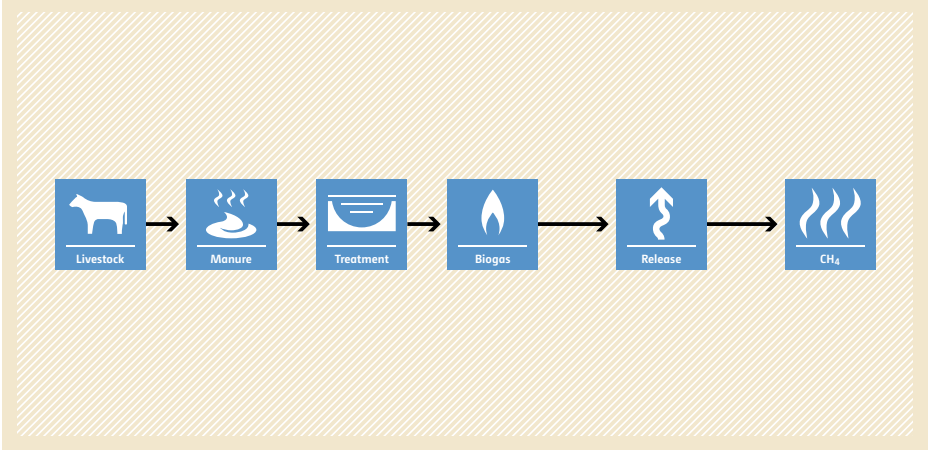
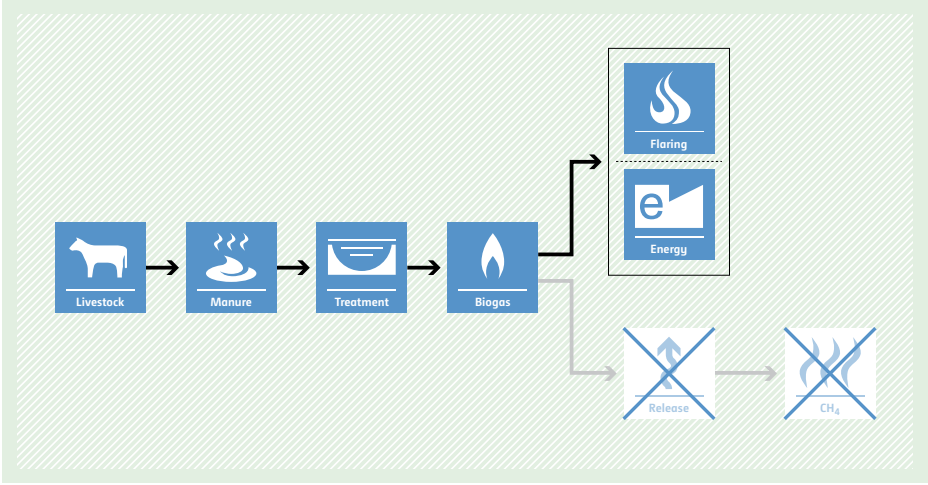
ACM0008 Abatement of methane from coal mines

Typical project(s)	Capture and destruction and/or use of coal bed methane, coal mine methane or ventilation air methane from new, existing or abandoned coal mine(s).
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • GHG destruction. Destruction of methane emissions and displacement of more-GHG-intensive service.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • All methane captured by the project should either be used or destroyed; • Not applicable to capture/use of virgin coal bed methane, e.g. methane extracted from coal seams for which there is no valid coal mining concession; • Not applicable to methane extraction from abandoned mines that are flooded due to regulation.
Important parameters	Monitored: <ul style="list-style-type: none"> • Methane destroyed or used; • Concentration of methane in extracted gas; • If applicable: electricity generated by project;
BASELINE SCENARIO Methane from coal mining activities is vented into the atmosphere.	 <p>The baseline scenario flowchart shows a linear process: 'Coal' (represented by a mine icon) leads to 'CH₄' (represented by a flame icon), which then leads to 'Release' (represented by an upward arrow icon), and finally to 'CH₄' (represented by a flame icon) being emitted into the atmosphere.</p>
PROJECT SCENARIO Methane from coal mining activities is captured and destroyed using oxidation or used for power or heat generation.	 <p>The project scenario flowchart shows a linear process starting with 'Coal' (mine icon) leading to 'CH₄' (flame icon). From this 'CH₄' node, two paths emerge: one leading to a box containing 'Flaring' (flame icon) and 'Energy' (e icon), which then leads to 'CO₂' (flame icon); the other path leads to a crossed-out 'Release' (upward arrow icon), which then leads to a crossed-out 'CH₄' (flame icon), indicating that methane is not released in this scenario.</p>

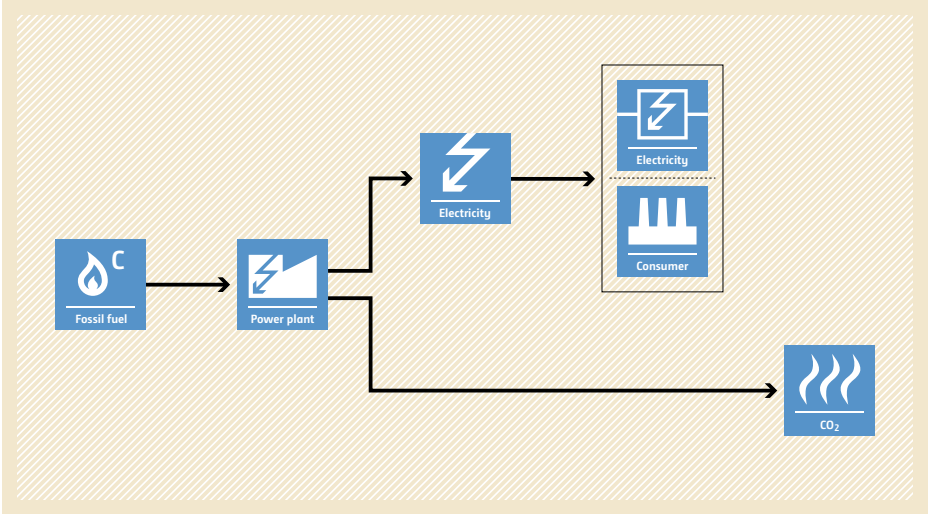
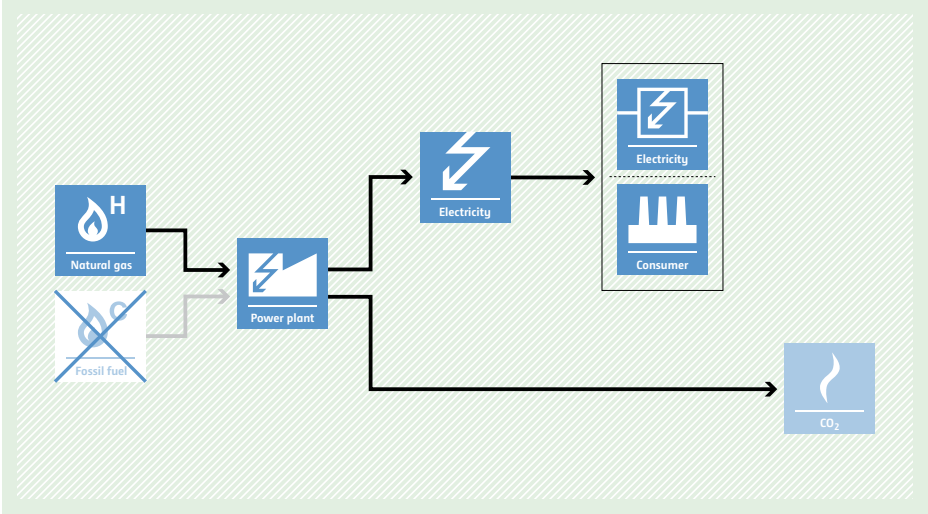
ACM0009 Fuel switching from coal or petroleum fuel to natural gas

<p>Typical project(s)</p>	<p>Switching from coal or petroleum fuel to natural gas in the generation of heat for industrial processes.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> Fuel switch. <p>Reduction of GHG emissions by switching from carbon-intensive to a less-carbon-intensive fuel in the generation of heat.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> No natural gas has previously been used; The fuel is neither used for cogeneration of electricity nor as an oxidant but generates heat for district heating or an industrial output other than heat; The project does not increase the capacity of thermal output or lifetime of the element processes or does not result in integrated process change.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> Quantity, net calorific value and CO₂ emission factor of baseline fuels; Energy efficiency of the element process(es) fired with coal or petroleum fuel. <p>Monitored:</p> <ul style="list-style-type: none"> Quantity, net calorific value and CO₂ emission factor of natural gas combusted in the element process(es) in the project; Energy efficiency of the element process(es) if fired with natural gas.
<p>BASILINE SCENARIO Coal or petroleum fuel is used to generate heat.</p>	 <p>The diagram shows a flow from 'Fossil fuel' (with a 'C' icon) to a 'Heat' box. From this 'Heat' box, one arrow points to another 'Heat' box, which then points to a 'Production' box. A second arrow from the first 'Heat' box points directly to a 'CO₂' box.</p>
<p>PROJECT SCENARIO Natural gas replaces coal or petroleum fuel.</p>	 <p>The diagram shows a flow from 'Natural gas' (with an 'H' icon) to a 'Heat' box. A 'Fossil fuel' box with a 'C' icon is crossed out with a large 'X'. From the 'Heat' box, one arrow points to another 'Heat' box, which then points to a 'Production' box. A second arrow from the first 'Heat' box points directly to a 'CO₂' box.</p>

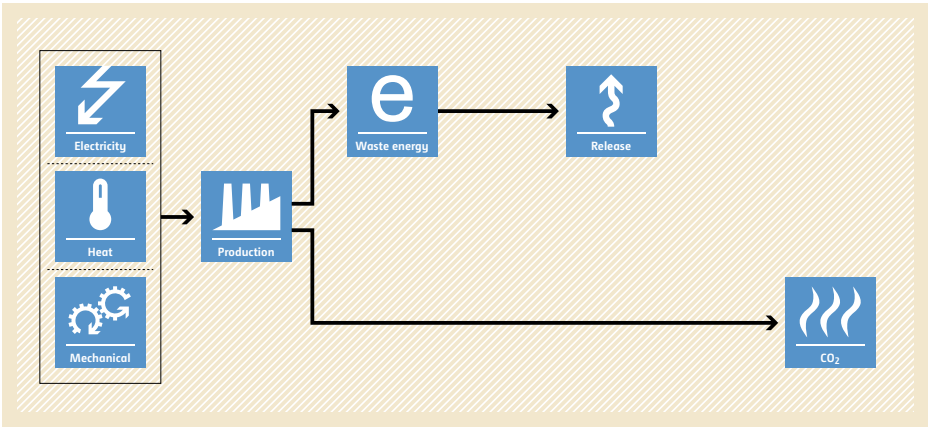
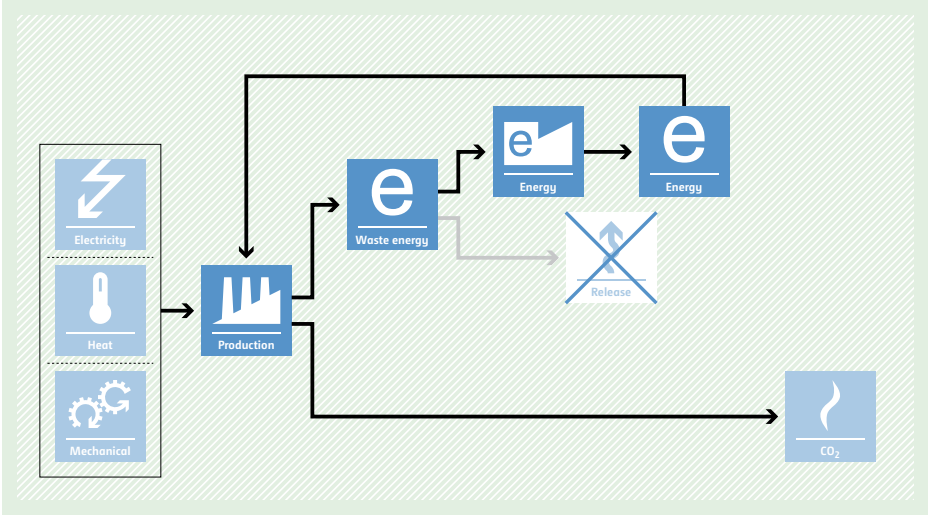
ACM0010 GHG emission reductions from manure management systems

<p>Typical project(s)</p>	<p>Manure management on livestock farms (cattle, buffalo, swine, sheep, goats, and/or poultry) where the existing anaerobic manure treatment system is replaced by, or a new system is constructed as, one or a combination of more than one animal waste management systems that result in less GHG emissions.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG destruction. <p>Destruction of methane emissions and displacement of a more-GHG-intensive service.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Farms where livestock populations are managed under confined conditions; • Farms where manure is not discharged into natural water resources (e.g. rivers or estuaries); • In case of anaerobic lagoon treatment systems, the depth of the lagoons used for manure management under the baseline scenario should be at least 1 m; • The annual average ambient temperature at the treatment site is higher than 5°C; • In the baseline case, the minimum retention time of manure waste in the anaerobic treatment system is greater than one month.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Number of heads of each population and the average animal weight in each population; • If dietary intake method is used, daily average gross energy intake has to be monitored; • Electricity and fossil fuel consumption.
<p>BASELINE SCENARIO Existing manure management system or system to be installed in the absence of the project activity results in release of methane into the atmosphere.</p>	 <p>The flowchart illustrates the baseline scenario. It starts with 'Livestock' (represented by a cow icon), which produces 'Manure' (represented by a puddle icon). The manure goes through 'Treatment' (represented by a lagoon icon), producing 'Biogas' (represented by a flame icon). The biogas is then 'Released' (represented by an upward arrow icon), which results in 'CH₄' emissions (represented by a flame icon).</p>
<p>PROJECT SCENARIO Capture of methane in the animal waste management systems results in less GHG emissions. In case of energetic use of methane, displacement of more-GHG-intensive energy generation.</p>	 <p>The flowchart illustrates the project scenario. It follows the same initial steps as the baseline: 'Livestock' produces 'Manure', which is 'Treated' to produce 'Biogas'. However, instead of releasing the biogas, it is captured and used for 'Flaring' (represented by a flame icon) and 'Energy' generation (represented by an 'e' icon). This process results in 'Release' (represented by a crossed-out upward arrow icon) and 'CH₄' emissions (represented by a crossed-out flame icon), indicating a significant reduction in methane emissions compared to the baseline.</p>

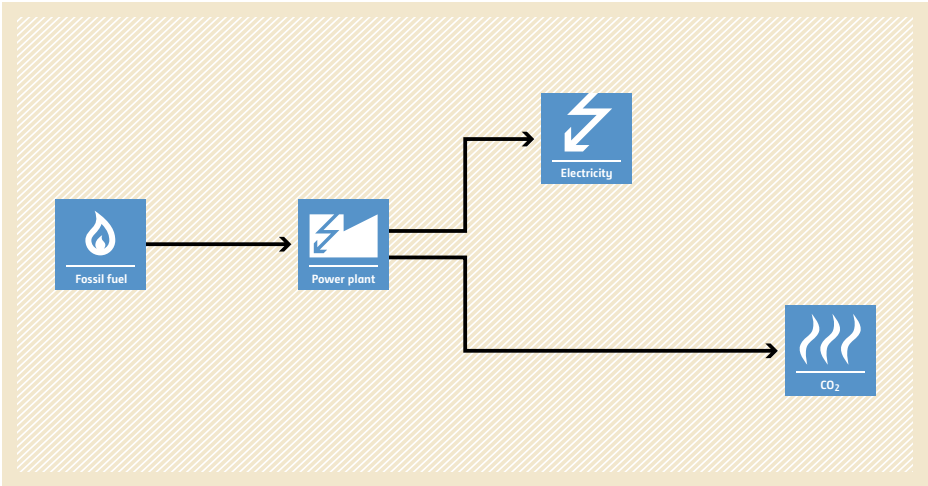
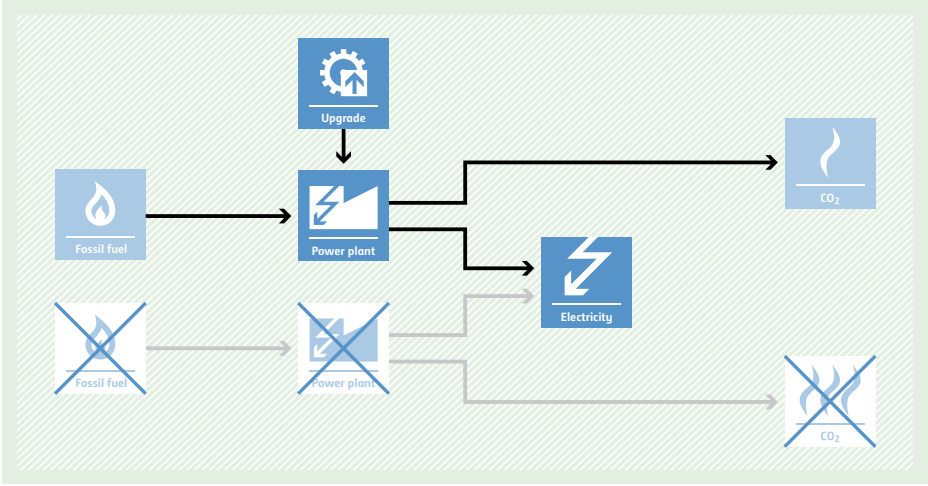
ACM0011 Fuel switching from coal and/or petroleum fuels to natural gas in existing power plants for electricity generation

Typical project(s)	Switch from coal or petroleum derived fuel to natural gas at an existing power plant.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> Fuel switch. Switch from coal or petroleum fuel to natural gas.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> At least three years of operation history are available; The fuel switch is from only coal and/or petroleum fuels to only natural gas; Only power is generated, for either only the grid or only a captive consumer; The project does not involve major retrofits/modifications of the power plant.
Important parameters	At validation: <ul style="list-style-type: none"> Historical fuel consumption and power generation; Electricity emission factor (can also be monitored ex post).
	Monitored: <ul style="list-style-type: none"> Quantity, calorific value and emission factor of fuels consumed in the project; Electricity supplied to the electric power grid or consuming facility.
BASELINE SCENARIO Coal and/or petroleum fuel is used to generate electricity.	 <p>The baseline scenario flowchart shows a process starting with 'Fossil fuel' (marked with a 'C' for carbon) entering a 'Power plant'. From the power plant, two paths emerge: one leading to 'Electricity' which is then supplied to a 'Consumer' (represented by a factory icon), and another leading to 'CO2' emissions (represented by a flame icon).</p>
PROJECT SCENARIO Natural gas is used to generate electricity.	 <p>The project scenario flowchart shows a process starting with 'Natural gas' (marked with an 'H' for hydrogen) and 'Fossil fuel' (marked with a 'C' for carbon) entering a 'Power plant'. The 'Fossil fuel' icon is crossed out with a large 'X', indicating it is no longer used. From the power plant, two paths emerge: one leading to 'Electricity' which is then supplied to a 'Consumer' (represented by a factory icon), and another leading to 'CO2' emissions (represented by a flame icon).</p>

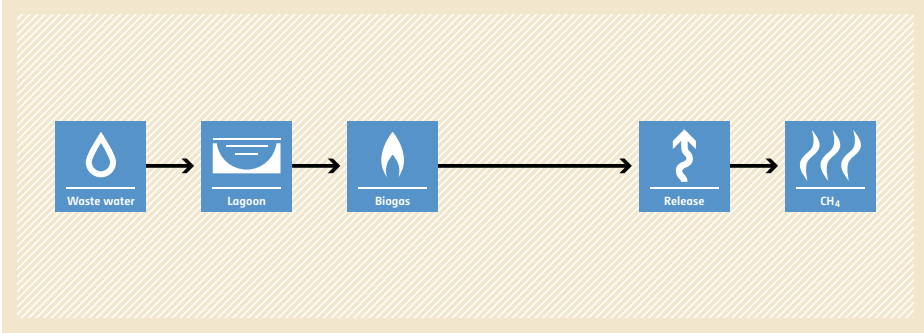
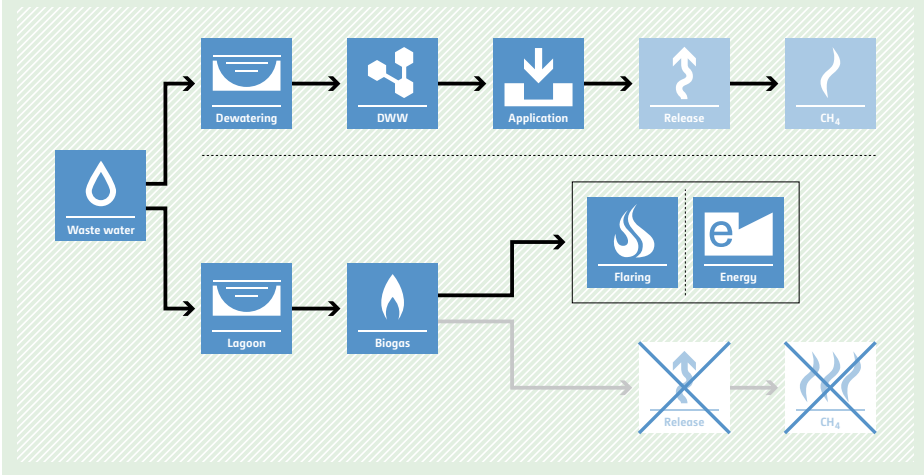
ACM0012 Waste energy recovery

<p>Typical project(s)</p>	<p>Energy from waste heat, waste gas or waste pressure in an existing or new industrial facility is recovered and used for in-house consumption or for export, by installation of a new power and/or heat and/or mechanical energy generation equipment, or by installation of a more efficient electricity generation equipment than already existing, or by upgrade of existing equipment but with better efficiency of recovery.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Waste energy recovery in order to displace more-carbon-intensive energy/technology.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • In the absence of the project, the waste energy carrying medium would remain unutilized (e.g. flared or released to the atmosphere). In case of partial use of the waste energy carrying medium in the baseline situation, the project increases the share of used waste energy by means of enhance or improved energy recovery of the waste energy carrying medium; • For capacity expansion projects, the new capacity should be treated as new facility and therefore the applicable guidance for baseline scenario determination, capping of baseline emissions and demonstration of use of waste energy in absence of the CDM project, should be followed; • Project activities can generate electricity and/or mechanical energy beyond the maximum capacity of the pre-project equipment of existing recipient facilities.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of electricity/mechanical energy/heat supplied to the recipient plant(s); • Quantity and parameters of waste energy streams during project.
<p>BASILINE SCENARIO Carbon-intensive sources will continue to supply heat/electricity/mechanical energy to the applications of the recipient facility and unrecovered energy from waste energy source will continue to be wasted.</p>	 <p>The baseline scenario flowchart shows three input boxes on the left: 'Electricity' (lightning bolt icon), 'Heat' (thermometer icon), and 'Mechanical' (gears icon). Arrows from these boxes point to a central 'Production' box (factory icon). From 'Production', an arrow points to 'Waste energy' (letter 'e' icon). From 'Waste energy', an arrow points to 'Release' (upward arrow icon). A separate arrow from 'Production' points to 'CO2' (flame icon).</p>
<p>PROJECT SCENARIO Heat/electricity/mechanical energy are generated by recovery of energy from a waste energy source and are supplied to the grid and/or applications in the recipient facility.</p>	 <p>The project scenario flowchart shows the same three input boxes on the left: 'Electricity', 'Heat', and 'Mechanical', all pointing to 'Production'. From 'Production', an arrow points to 'Waste energy'. From 'Waste energy', an arrow points to 'Energy' (letter 'e' icon). From this 'Energy' box, an arrow points to another 'Energy' box. From this second 'Energy' box, an arrow points back to 'Production'. A separate arrow from 'Production' points to 'CO2'. The 'Release' box from the baseline scenario is crossed out with a large 'X'.</p>

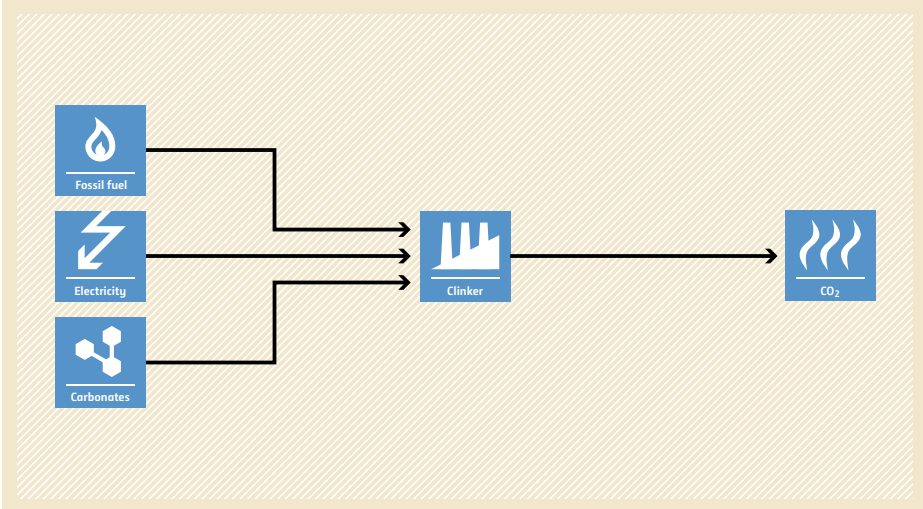
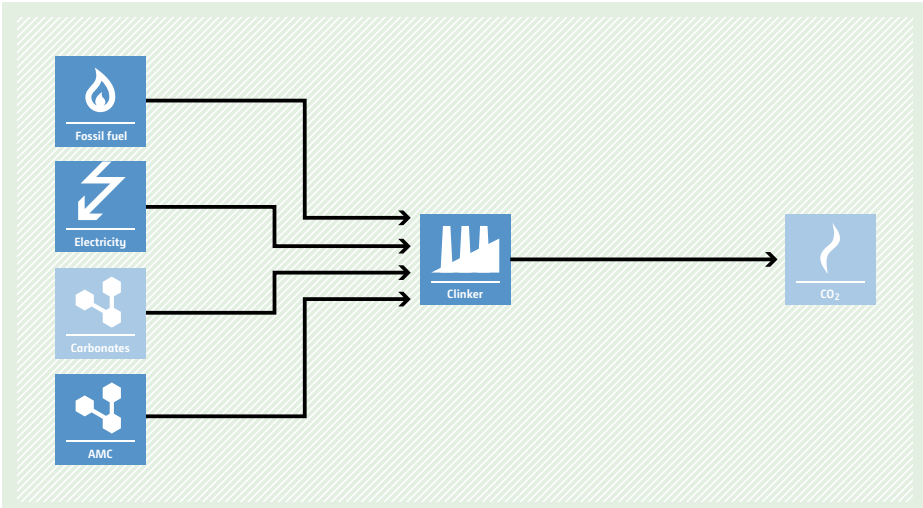
ACM0013 Construction and operation of new grid connected fossil fuel fired power plants using a less GHG intensive technology

<p>Typical project(s)</p>	<p>Construction and operation of a new fossil fuel fired power plant that supplies electricity to the grid using more-efficient power generation technology than would otherwise be used with the given fossil fuel (e.g. construction of a supercritical coal fired power plant).</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Construction of a highly efficient new grid-connected fossil-fuel-fired power plant.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Only supply of power to the grid is applicable (no cogeneration); • The identified baseline fuel category is used as the main fuel category in more than 50% of the total rated capacity of power plants which were commissioned for commercial operation in the most recent five calendar/fiscal years prior to the publication of the PDD for global stakeholder consultation, within the electric grid to which the project plant will be connected; • At least five new power plants can be identified as similar to the project plant (in the baseline identification procedure).
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Energy efficiency of the power generation technology that has been identified as the most likely baseline scenario. <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity, calorific value and emission factor of fuels consumed in the project activity; • Electricity supplied to the electric power grid.
<p>BASELINE SCENARIO Electricity is generated by a less-efficient new grid-connected power plant using fossil fuel.</p>	 <p>The diagram illustrates the baseline scenario. It shows a flow from 'Fossil fuel' (represented by a flame icon) to a 'Power plant' (represented by a lightning bolt icon). From the power plant, two arrows branch out: one to 'Electricity' (lightning bolt icon) and another to 'CO₂' (flame icon).</p>
<p>PROJECT SCENARIO Electricity is generated by a more-efficient new grid-connected power plant using less fossil fuel.</p>	 <p>The diagram illustrates the project scenario. It shows an 'Upgrade' (gear icon) leading to a 'Power plant' (lightning bolt icon). This upgraded power plant receives 'Fossil fuel' (flame icon) and produces 'Electricity' (lightning bolt icon) and 'CO₂' (flame icon). Below this, a crossed-out version of the baseline scenario is shown, indicating that the less-efficient power plant and its associated fossil fuel and CO₂ emissions are being replaced.</p>

ACM0014 Treatment of wastewater

<p>Typical project(s)</p>	<p>Treatment of wastewater in a new anaerobic digester, capture and flaring or utilizing of the generated biogas for electricity or heat generation; dewatering of wastewater and application to land; and treatment of wastewater in the same treatment plant as in the baseline situation but treatment of the sludge from primary and/or secondary settler either in a new anaerobic digester or treatment of sludge under clearly aerobic conditions.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG destruction. <p>Destruction of methane emissions and displacement of more-GHG-intensive service.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The average depth of the open lagoons or sludge pits in the baseline scenario is at least 1 m; • The residence time of the organic matter in the open lagoon or sludge pit system should be at least 30 days; • Inclusion of solid materials in the project activity is only applicable where: <ul style="list-style-type: none"> – Such solid materials are generated by the industrial facility producing the wastewater; and – The solid materials would be generated both in the project and in the baseline scenario; • The sludge produced during the implementation of the project activity is not stored onsite before land application to avoid any possible methane emissions from anaerobic degradation.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity and chemical oxygen demand (COD) of wastewater or sludge that is treated in the project; • Quantity of biogas collected and concentration of methane in the biogas; • Net quantity of electricity or heat generated in the project; • Quantity of dewatered sludge/wastewater applied to land.
<p>BASELINE SCENARIO Existing wastewater treatment system results in release of methane into the atmosphere.</p>	 <pre> graph LR A[Waste water] --> B[Lagoon] B --> C[Biogas] C --> D[Release] D --> E[CH4] </pre>
<p>PROJECT SCENARIO Capture of methane in the wastewater treatment system results in less GHG emissions. In case of energetic use of methane, displacement of more-GHG-intensive energy generation. In cases where wastewater is dewatered (DWW) and the output is used for land application less methane is emitted into the atmosphere.</p>	 <pre> graph LR A[Waste water] --> B[Dewatering] A --> C[Lagoon] B --> D[DWW] D --> E[Application] E --> F[Release] F --> G[CH4] C --> H[Biogas] H --> I[Flaring] H --> J[Energy] I --> K[Release] J --> L[CH4] K --- M[Crossed out Release] L --- N[Crossed out CH4] </pre>

ACM0015 Emission reductions from raw material switch in clinker production

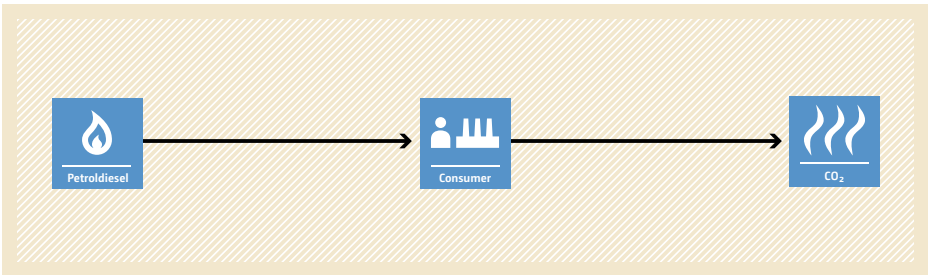
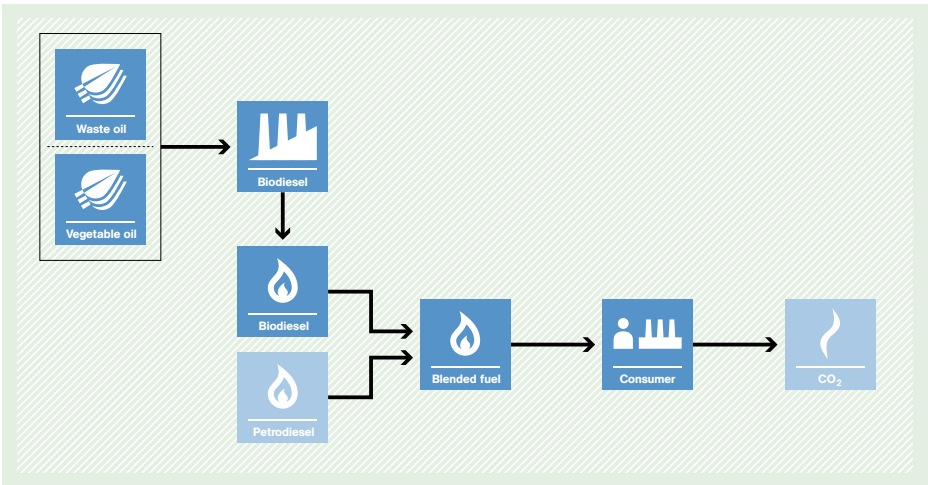
<p>Typical project(s)</p>	<p>Partial or full switch to alternative raw materials that do not contain carbonates (AMC) in the production of clinker in cement kilns in existing and Greenfield cement plants, with or without additional energy efficiency measures.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Feedstock switch; • Energy efficiency. <p>Avoidance of process CO₂ emissions by switching to carbonate free feedstock in the production of clinker. Additional energy efficiency measures may be implemented.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • Installed capacity of clinker production, lifetime of equipment, quality and types of clinker are not changed; • No AMC have previously been used in the clinker production at the plant; • At least 1.5 times the quantity of AMC required for meeting the aggregate demand of the proposed project activity and all existing users consuming the same AMC in the project area is available.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Historical raw material use and clinker production and quality for existing plants. <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of alternative materials consumed in the project; • Quantity and quality of clinker produced in the project; • Specific Kiln Calorific Consumption; • Electricity consumption.
<p>BASELINE SCENARIO Raw materials that contain calcium and/or magnesium carbonates (e.g. limestone) are used to produce clinker.</p>	
<p>PROJECT SCENARIO Alternative raw materials that do not contain carbonates (AMC) are used to produce clinker.</p>	

ACM0016 Mass Rapid Transit Projects

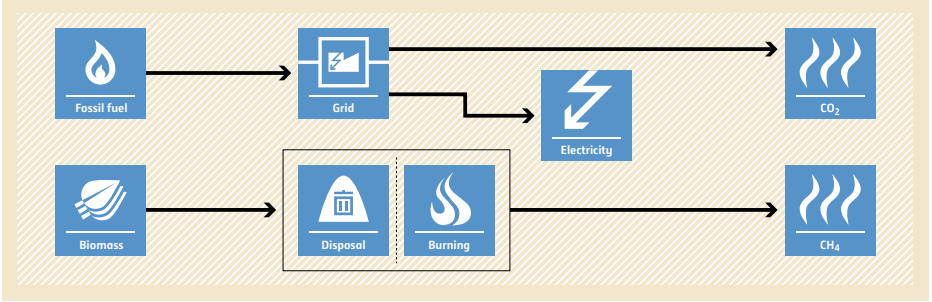
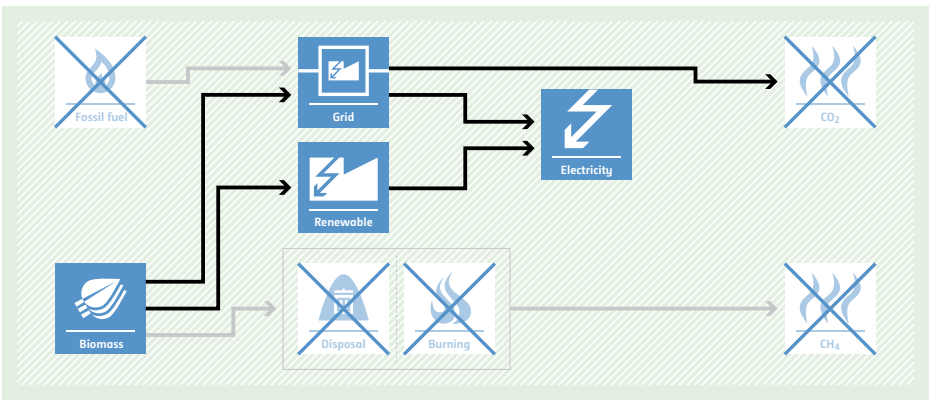


<p>Typical project(s)</p>	<p>Establishment and operation of rail-based or bus-based mass rapid transit systems in urban or suburban regions for passenger transport by replacing a traditional urban bus-driven public transport system.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Displacement of more-GHG and, if gaseous fuels are used, CH₄-intensive transport modes (existing fleet of buses operating under mixed traffic conditions) by less-GHG-intensive ones (newly developed rail-based systems or segregated bus lanes).</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project either installs new railways or segregated bus lanes in order to replace existing bus routes (e.g. by scrapping buses, closing or rescheduling bus routes). For bus rapid transit systems with feeder plus trunk routes, methodology AM0031 is recommended; • The project activity involves urban or suburban transport projects. It is not applicable for inter-urban transport; • The methodology is not applicable for operational improvements (e.g. new or larger buses) of an already existing and operating bus lane or rail-based system.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Baseline distance and transport mode, which are obtained through a comprehensive survey involving the users of the project transport system; • Occupancy rates and travelled distances of different transport modes; • If expected emissions per passenger kilometer is less than or equal to 50 gCO₂/pkm (for road based MRTS) and 0.1 kWh/pkm (for rail based MRTS), the project is considered automatically additional. <p>Monitored:</p> <ul style="list-style-type: none"> • The number of passengers transported in the project; • Specific fuel consumption, occupancy rates and travelled distances of different transport modes as well as the speed of vehicles on affected roads.
<p>BASILINE SCENARIO Passengers are transported using a diverse transport system involving buses, trains, cars, non-motorized transport modes, etc. operating under mixed traffic conditions.</p>	<p>The diagram illustrates the baseline scenario where four transport modes—Train, Bus, Car, and Motorcycle—are shown in separate boxes on the left. Arrows from each of these boxes converge and point towards a single box on the right labeled 'CO₂' with a flame icon, representing the total emissions from this mixed system.</p>
<p>PROJECT SCENARIO Passengers are transported using newly developed rail-based systems or segregated bus lanes that partially displace the existing bus-driven transport system operated under mixed traffic conditions.</p>	<p>The diagram illustrates the project scenario. It features a central box containing icons for 'Train' and 'Bus'. Arrows from this central box, along with arrows from 'Car' and 'Motorcycle' boxes on the left, all point towards a 'CO₂' emissions box on the right. This indicates that the project's rail-based or segregated bus lanes partially displace the existing bus-driven system, leading to a change in the overall transport mix and emissions profile.</p>

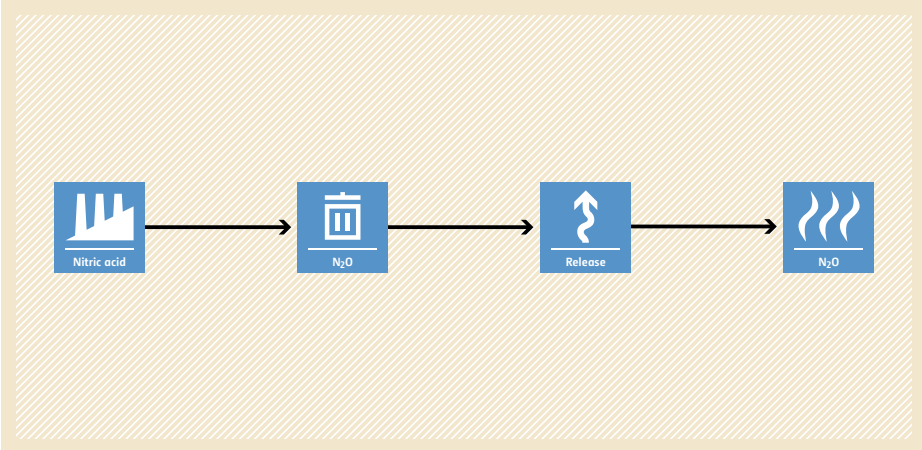
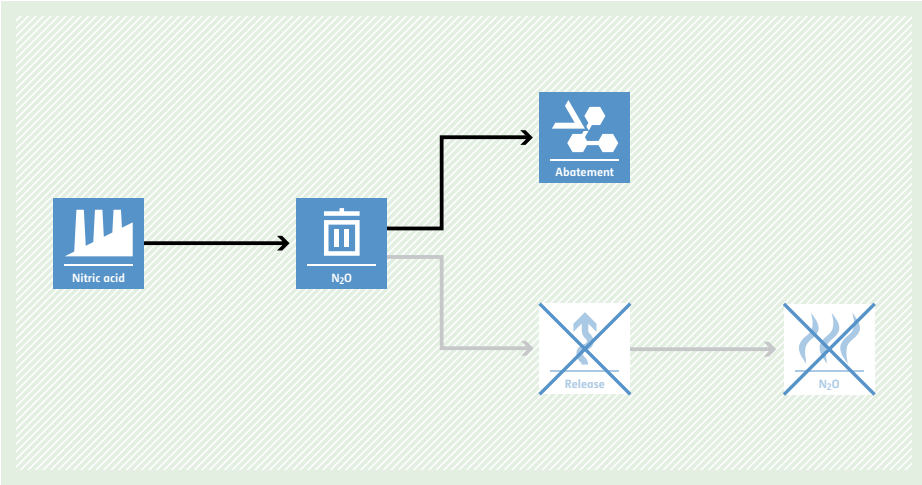
ACM0017 Production of biodiesel for use as fuel

<p>Typical project(s)</p>	<p>Construction and operation of a biofuel production plant for production of blended biofuel that is used as fuel in existing stationary installations (e.g. captive generators) and/or in vehicles. Biofuel is produced from waste oil/fat seeds or crops that are cultivated on dedicated plantations.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy. <p>Displacement of more-GHG-intensive fossil fuel for combustion in vehicles and/or stationary installations.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The alcohol used for esterification (production of biodiesel) is methanol from fossil fuel origin; • No modifications in the consumer stationary installations or in the vehicles engines are necessary to consume/combust the (blended) biofuel; • Planted biomass is eligible if specific conditions elaborated in “Project and leakage emissions from biomass” are met; • Consumers and producers of the (blended) biofuel are bound by a contract that allows the producer to monitor consumption/sale/blending of (blended) biofuel and that states that the consumer shall not claim CERs resulting from its consumption.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Quantity of biofuel from waste oil/fat, biomass residues or feedstock from dedicated plantations consumed by host country consumers to substitute fossil fuel; • Project emissions from transport of oilseeds, biomass residues, vegetable oil, waste oil/fats, biofuel if distances of more than 50 km are covered; fossil fuel (including methanol) and electricity consumption; • If applicable, parameters to monitor project emissions (CO₂, CH₄, N₂O) associated with the cultivation of seeds or crops.
<p>BASELINE SCENARIO Consumption of fossil fuel.</p>	 <p>The baseline scenario flowchart shows a linear process. It starts with a blue box labeled 'Petrodiesel' containing a flame icon. An arrow points to a blue box labeled 'Consumer' containing a factory icon. A second arrow points to a blue box labeled 'CO₂' containing a flame icon.</p>
<p>PROJECT SCENARIO Production of blended biofuel and consumption in existing stationary installations (e.g. captive generators) and/or in vehicles.</p>	 <p>The project scenario flowchart shows a more complex process. It begins with two blue boxes, 'Waste oil' and 'Vegetable oil', each with a leaf icon, grouped in a dashed box. An arrow points to a blue box labeled 'Biodiesel' with a factory icon. From there, an arrow points to another blue box labeled 'Biodiesel' with a flame icon. This 'Biodiesel' box has two arrows pointing to a blue box labeled 'Blended fuel' with a flame icon. A third blue box labeled 'Petrodiesel' with a flame icon also has an arrow pointing to the 'Blended fuel' box. From the 'Blended fuel' box, an arrow points to a blue box labeled 'Consumer' with a factory icon. Finally, an arrow points to a blue box labeled 'CO₂' with a flame icon.</p>

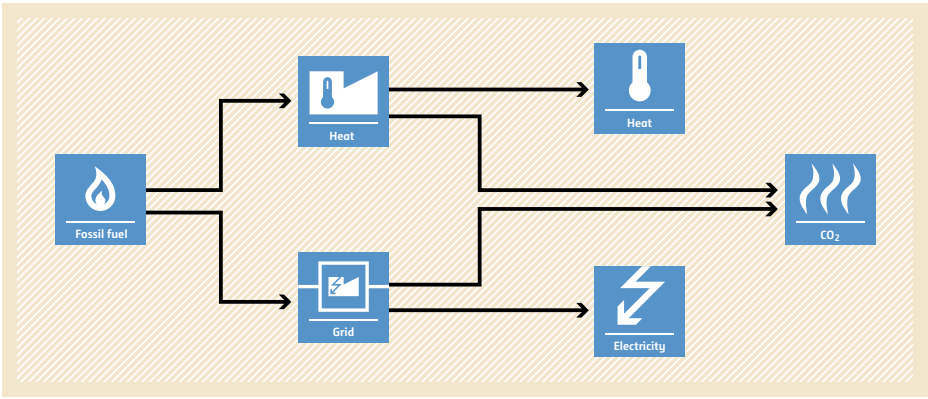
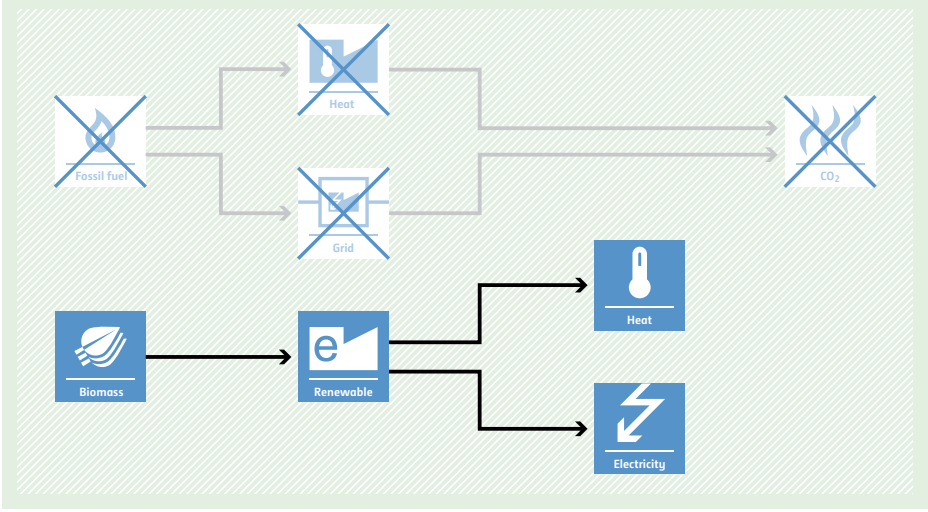
ACM0018 Electricity generation from biomass in power-only plants

<p>Typical project(s)</p>	<p>Generation of power using biomass as fuel, in new biomass based power plants at sites where currently no power generation occurs (Greenfield), replacement or installation of operation units next to existing power plants (capacity expansion projects), energy efficiency improvement projects or replacement of fossil fuel by biomass in existing power plants (fuel switch projects). The biomass based power generation may be combined with solar thermal power generation.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable energy; • Energy efficiency; • Fuel switch. <p>Displacement of more GHG-intensive electricity generation in the grid or on-site. Avoidance of methane emissions from anaerobic decay of biomass residues. Displacement of more-GHG-intensive fossil fuel for combustion in stationary installations.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • If biomass from a production process is used, the implementation of the project shall not result in an increase of the processing capacity of raw input; • The methodology is applicable to power-only plants; • Planted biomass is eligible if specific conditions elaborated in “Project and leakage emissions from biomass” are met; • Fossil fuels may be co-fired in the project plant. However, the amount of fossil fuels co-fired shall not exceed 80% of the total fuel fired on an energy basis; • In case of existing facilities, three years of historical data is required for the calculation of emissions reductions; • Projects that chemically process the biomass prior to combustion (e.g. by means of esterification of waste oils, fermentation and gasification, etc.) are not eligible under this methodology. The biomass can however be processed physically such as by means of drying, pelletization, shredding and briquetting.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • If applicable: grid emission factor (can also be monitored ex post). <p>Monitored:</p> <ul style="list-style-type: none"> • Electricity generated in the project; • Quantity and moisture content of the biomass used in the project and electricity and fossil fuel consumption of the project.
<p>BASELINE SCENARIO Electricity would be produced by more-carbon-intensive technologies based on fossil fuel or less efficient power plants. Biomass could partially decay under anaerobic conditions, resulting in methane emissions.</p>	 <p>The baseline scenario flowchart shows two input paths. The top path starts with 'Fossil fuel' (flame icon) leading to 'Grid' (power plug icon), which then leads to 'Electricity' (lightning bolt icon) and finally to 'CO2' (flame icon). The bottom path starts with 'Biomass' (leaf icon) leading to a box containing 'Disposal' (trash can icon) and 'Burning' (flame icon). From this box, arrows lead to 'Electricity' and 'CH4' (flame icon).</p>
<p>PROJECT SCENARIO Use of biomass residues replaces fossil fuel use. Decay of biomass residues used as fuel is avoided.</p>	 <p>The project scenario flowchart shows the same inputs as the baseline. 'Fossil fuel' is crossed out with a blue 'X'. 'Biomass' (leaf icon) now leads to 'Renewable' (lightning bolt icon), which then leads to 'Electricity' and 'CO2'. The 'Disposal' and 'Burning' box is also crossed out with a blue 'X', and 'CH4' is crossed out with a blue 'X'.</p>

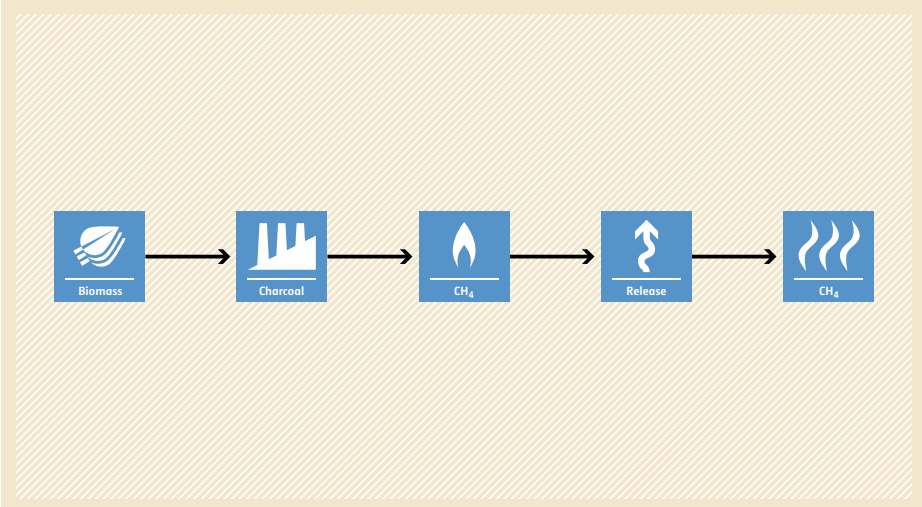
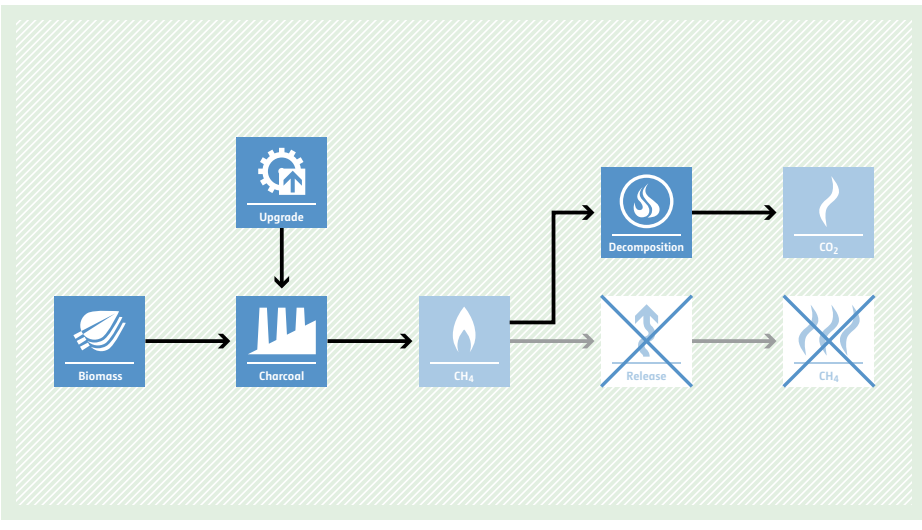
ACM0019 N₂O abatement from nitric acid production

Typical project(s)	Project activities that introduce N ₂ O abatement measures in nitric acid plants.
Type of GHG emissions mitigation action	<ul style="list-style-type: none"> • Destruction of GHG. Destruction of N ₂ O emissions through abatement measures.
Important conditions under which the methodology is applicable	<ul style="list-style-type: none"> • Continuous real-time measurements of the N₂O concentration and the total gas volume flow can be carried out in the tail gas stream after the abatement of N₂O emissions throughout the crediting period of the project activity; • No law or regulation is in place mandating the complete or partial destruction of N₂O from nitric acid plant.
Important parameters	At validation: <ul style="list-style-type: none"> • Nitric acid produced. <hr/> Monitored: <ul style="list-style-type: none"> • Mass flow of N₂O in the gaseous stream of the tail gas; • Nitric acid produced; • Fraction of time during which the by-pass valve on the line feeding the tertiary N₂O abatement facility was open.
BASELINE SCENARIO Venting of N ₂ O generated during the production of nitric acid to the atmosphere.	 <p>The diagram illustrates the baseline scenario for N₂O emissions from nitric acid production. It consists of four sequential steps connected by arrows: 1. A factory icon labeled 'Nitric acid' representing the production process. 2. A trash can icon labeled 'N₂O' representing the generation of emissions. 3. An upward-pointing arrow icon labeled 'Release' representing the venting of emissions. 4. A flame icon labeled 'N₂O' representing the final release into the atmosphere.</p>
PROJECT SCENARIO Implementation of different abatement measures to destroy N ₂ O emissions (i.e. installation of secondary or tertiary abatement systems).	 <p>The diagram illustrates the project scenario for N₂O emissions from nitric acid production. It shows the same initial steps as the baseline scenario: 1. 'Nitric acid' production, 2. 'N₂O' generation. However, instead of direct release, the emissions are directed to an 'Abatement' facility (represented by a recycling symbol icon). A separate path shows the 'Release' and 'N₂O' final stages, but these are crossed out with a large 'X', indicating that these emissions are significantly reduced or eliminated by the abatement system.</p>

ACM0020 Co-firing of biomass residues for heat generation and/or electricity generation in grid connected power plants

<p>Typical project(s)</p>	<p>Operation of a single piece of biomass-residue co-fired heat generation equipment. The heat output of the heat generators may be used onsite to produce electric power in power-only plants, or cogenerate electric power in cogeneration plants. Typical activities are partial replacement of fossil fuels by biomass residues in existing or new heat generation equipment.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable Energy. <p>Displacement of more-GHG-intensive electricity generation in grid or heat and electricity generation on-site.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • If biomass from a production process is used, the implementation of the project shall not result in an increase of the processing capacity of raw input; • Only biomass residues, not biomass in general, are eligible; • The amount of biomass residues co-fired shall not exceed 50% of the total fuel fired on an energy basis; • No biomass is co-fired in the identified baseline scenario and the same type of fossil fuel is fired in the identified baseline scenario as in the project activity.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • If applicable: grid emission factor (can also be monitored ex post). <p>Monitored:</p> <ul style="list-style-type: none"> • Quantity and moisture content of the biomass residues used in the project; • Electricity and/or heat generated in the project activity; • Electricity and fossil fuel consumption of the project activity.
<p>BASELINE SCENARIO Electricity or heat would be produced by more-carbon-intensive technologies based on fossil fuel.</p>	 <p>The diagram illustrates the baseline scenario. It starts with a 'Fossil fuel' icon (flame) on the left. Two arrows lead to 'Heat' (thermometer icon) and 'Grid' (power plug icon). From 'Heat', two arrows lead to 'Heat' (thermometer icon) and 'CO2' (flame icon). From 'Grid', two arrows lead to 'Electricity' (lightning bolt icon) and 'CO2' (flame icon).</p>
<p>PROJECT SCENARIO Use of biomass residues for power or heat generation instead of fossil fuel.</p>	 <p>The diagram illustrates the project scenario. It starts with a 'Biomass' icon (leaves) on the left. An arrow leads to 'Renewable' (e icon). From 'Renewable', two arrows lead to 'Heat' (thermometer icon) and 'Electricity' (lightning bolt icon). The 'Heat' and 'Electricity' outputs are shown to displace the 'Heat' and 'Grid' outputs from the baseline scenario. The 'CO2' emissions from the 'Heat' and 'Grid' paths in the baseline are crossed out with a large 'X', indicating they are avoided. The 'CO2' emissions from the 'Renewable' path are also shown to be significantly reduced.</p>

ACM0021 Reduction of emissions from charcoal production by improved kiln design and/or abatement of methane

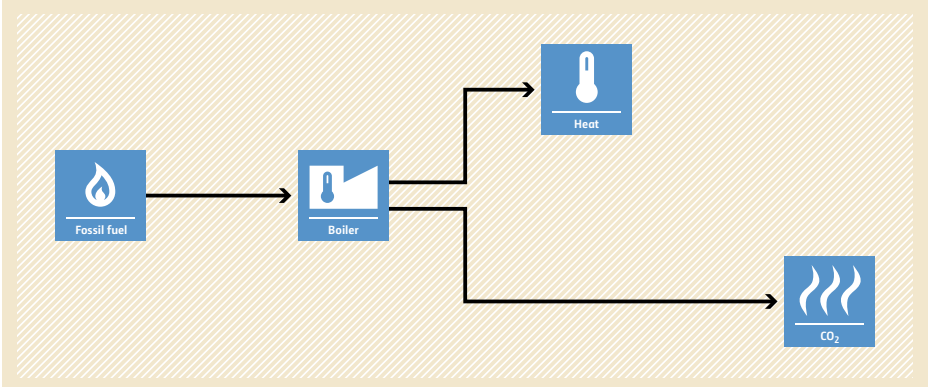
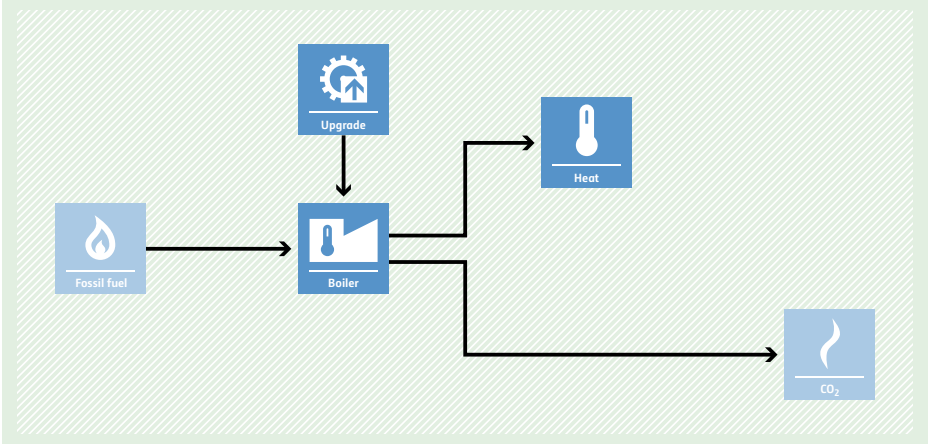
<p>Typical project(s)</p>	<p>Installation of charcoal kilns of enhanced design to replace existing kilns, and/or installation of methane abatement units at existing or new kilns.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG emission avoidance. <p>Avoidance or reduction of CH₄ emissions in charcoal production process.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project does not change the type and sources of input for charcoal production; • There are no regulations that prevent venting of methane generated from charcoal production facility; • All the existing kilns affected by the project activity shall have the same mechanical design.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Charcoal production of each kiln; • Start time and end time of each carbonization cycle of each kiln; • Combustion status of each methane abatement unit (if applicable).
<p>BASELINE SCENARIO High CH₄ emissions associated with the production of charcoal.</p>	 <p>The baseline scenario flowchart illustrates the process of charcoal production and methane emissions. It starts with 'Biomass' (represented by a leaf icon), which is processed into 'Charcoal' (represented by a factory icon). From the charcoal production stage, 'CH₄' (represented by a flame icon) is generated. This CH₄ is then shown as being 'Released' (represented by an upward arrow icon) into the atmosphere, where it is labeled as 'CH₄' (represented by a flame icon).</p>
<p>PROJECT SCENARIO Decreased or avoided CH₄ emissions associated with production of charcoal.</p>	 <p>The project scenario flowchart shows an 'Upgrade' (represented by a gear icon) being applied to the charcoal production process. This leads to 'Decomposition' (represented by a flame icon with a circular arrow), which results in 'CO₂' (represented by a flame icon). Additionally, the 'Release' of CH₄ (represented by an upward arrow icon) is shown as being avoided, indicated by a large 'X' over the icon. The final 'CH₄' (represented by a flame icon) is also shown with a large 'X' over it, indicating that emissions are reduced or avoided.</p>

ACM0022 Alternative waste treatment processes

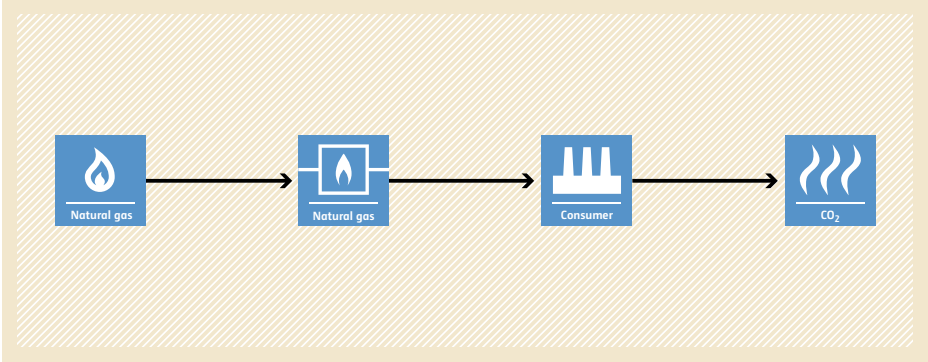
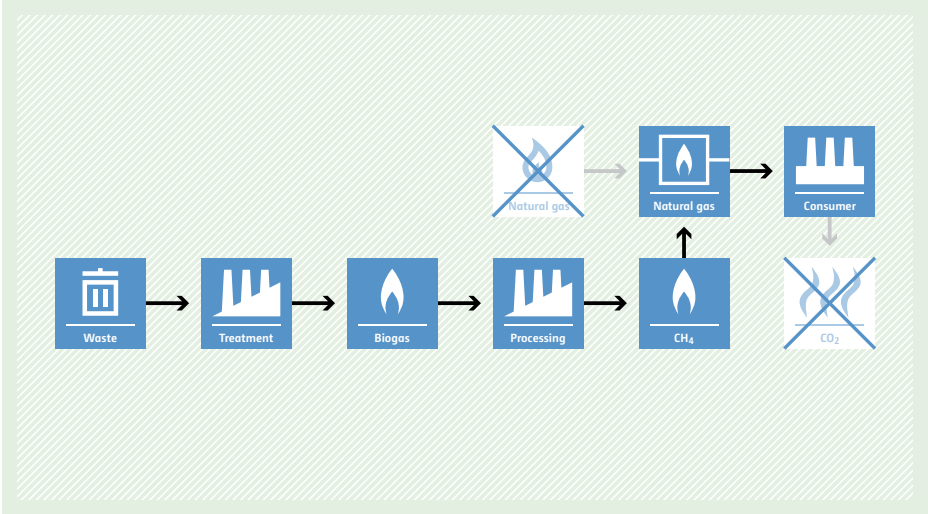


<p>Typical project(s)</p>	<p>Project activities involve the installation and operation of new plants for the treatment of fresh waste through any combination of the following processes: a) Composting process under aerobic conditions; b) Gasification process to produce syngas and its use; c) Anaerobic digestion with biogas recovery and flaring and/or its use; d) Mechanical/thermal treatment to produce refuse-derived fuel (RDF)/stabilized biomass (SB) and its use; e) Incineration of fresh waste to produce thermal/electric energy; f) Co-composting/anaerobic digestion of wastewater in combination with solid waste.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • GHG emission avoidance. <p>CH₄ emissions due to anaerobic decay of organic waste are avoided by alternative waste treatment processes;</p> <ul style="list-style-type: none"> • Renewable energy. <p>Organic waste is used as renewable source of energy.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project activity does not reduce the amount of waste that would be recycled in the absence of the project; • When applicable regulations mandate any waste treatment process implemented under the project activity, the rate of compliance with such regulations is below 50 per cent; • Hazardous wastes/wastewater are not eligible.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Weight fraction of the different waste types in a sample (where applicable); • Total amount of waste prevented from disposal; • Electricity and fossil fuel consumption in the project site.
<p>BASELINE SCENARIO Disposal of the waste in a landfill site without capturing landfill gas or with partly capturing and subsequently flaring it.</p>	<pre> graph LR Waste[Waste] --> Disposal[Disposal] Disposal --> LandfillGas[Landfill gas] LandfillGas --> Release[Release] Release --> CH4[CH4] </pre>
<p>PROJECT SCENARIO Alternative waste treatment process, such as composting, gasification, anaerobic digestion with biogas collection and flaring and/or its use, mechanical/thermal treatment process to produce RDF or SB and its use, or incineration of fresh waste for energy generation.</p>	<pre> graph LR Waste[Waste] --> Composting[Composting] Waste --> Treatment[Treatment] Treatment --> Burning[Burning] Waste --> Disposal[Disposal] Disposal --> LandfillGas[Landfill gas] LandfillGas --> Release[Release] Release --> CH4[CH4] </pre>

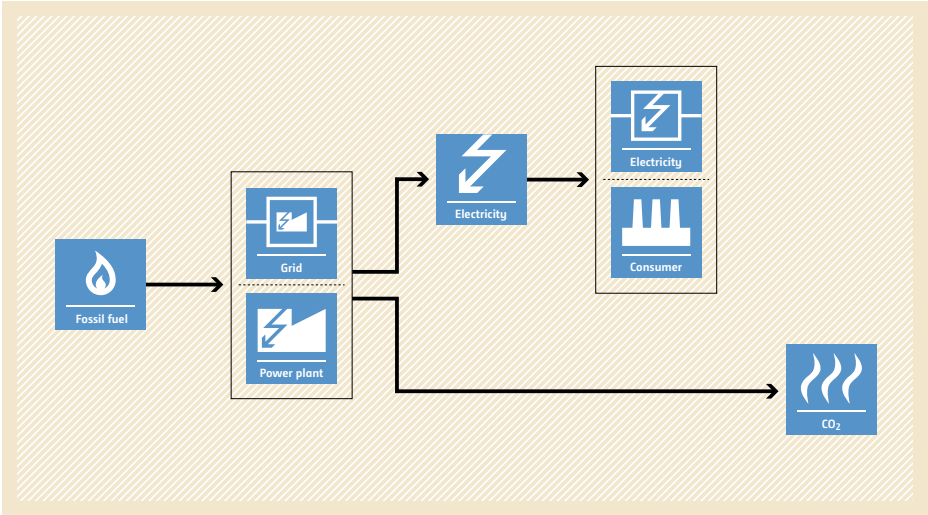
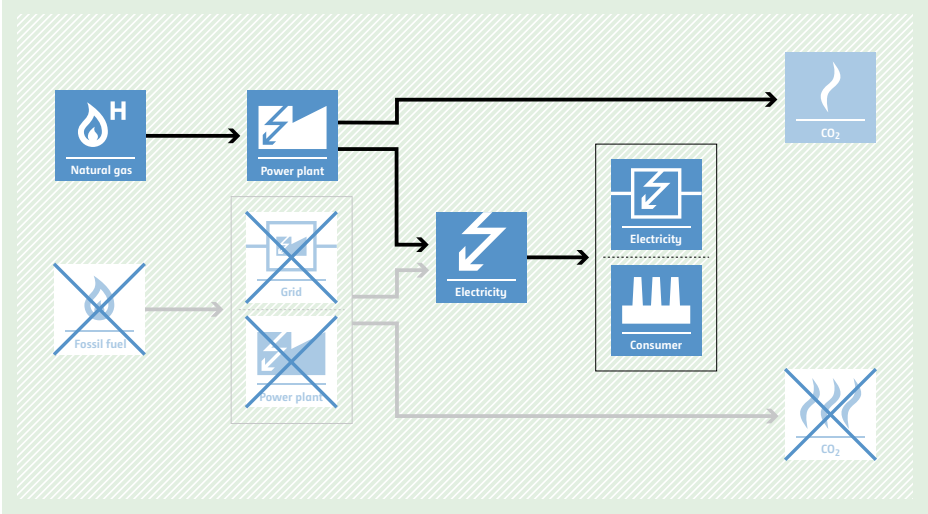
ACM0023 Introduction of an efficiency improvement technology in a boiler

<p>Typical project(s)</p>	<p>Improvement of the boiler efficiency through introduction of efficiency improvement technology.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. <p>Switch to more-energy-efficient technology.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The boiler has an operating history of at least three years; • The efficiency improvement technology to be used under the project activity was not used at the project facility on a commercial basis prior to the implementation of the project activity; • The type of fossil fuel used by the project during the crediting period was also used during the most recent three years prior to the implementation of the project activity; • The technologies allowed are oil/water emulsion technology, fire side cleaning technology and coal catalyst technology.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Historical fuel consumption in boiler. <p>Monitored:</p> <ul style="list-style-type: none"> • Fuel consumption in the boiler; • Energy generation from the boiler.
<p>BASELINE SCENARIO Operation of boilers at lower efficiency of combustion in absence of efficiency improvement technology.</p>	 <p>The diagram shows a flow from 'Fossil fuel' (flame icon) to a 'Boiler' (thermometer icon). From the boiler, two arrows branch out: one to 'Heat' (thermometer icon) and one to 'CO2' (flame icon).</p>
<p>PROJECT SCENARIO Efficiency improvement technology is introduced to improve the efficiency of boilers.</p>	 <p>The diagram shows a flow from 'Fossil fuel' (flame icon) to a 'Boiler' (thermometer icon). An 'Upgrade' (gear icon) is shown above the boiler with an arrow pointing down to it. From the boiler, two arrows branch out: one to 'Heat' (thermometer icon) and one to 'CO2' (flame icon).</p>

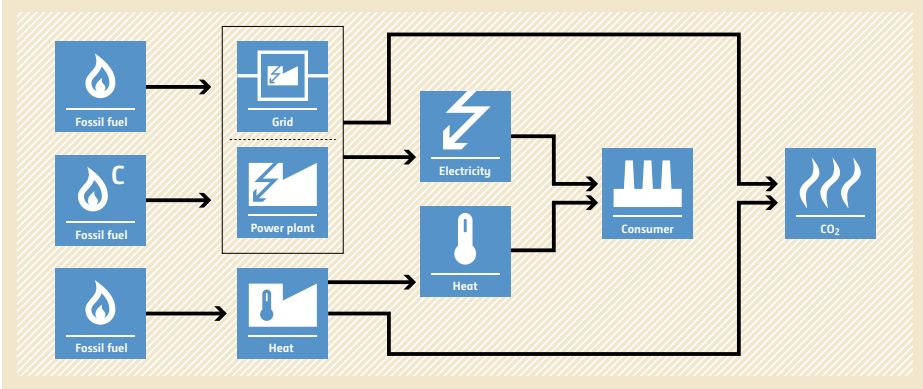
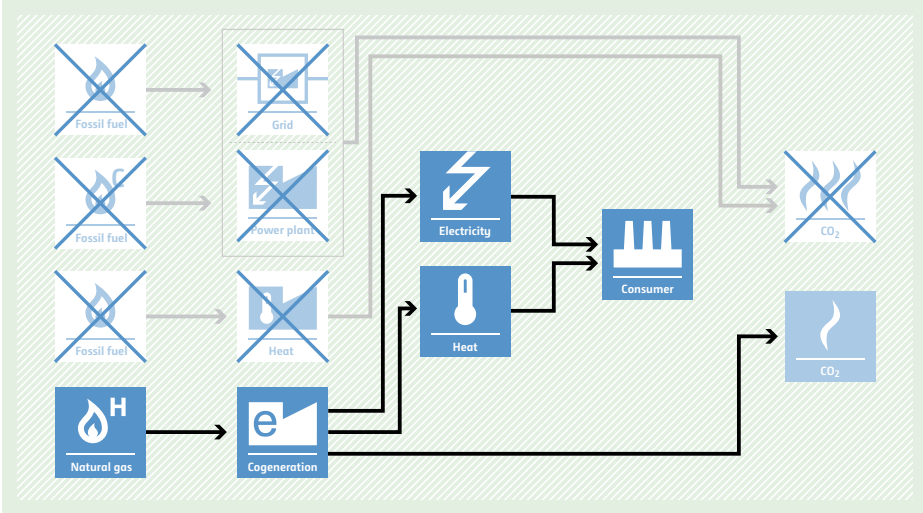
ACM0024 Natural gas substitution by biogenic methane produced from the anaerobic digestion of organic waste

<p>Typical project(s)</p>	<p>Project activities where organic waste (e.g. vinasse, organic MSW, etc.) is treated by anaerobic digestion. The resulted output is upgraded and used to replace natural gas in a natural gas distribution system.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Renewable Energy. <p>Organic waste is used as renewable energy source by the displacement of natural gas in a natural gas distribution system.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The project does not reduce the amount of waste that would be recycled in the absence of the project activity; • Resulting digestate is further stabilized aerobically (e.g. composted), applied to land or sent to a solid waste disposal site; • Neither organic waste nor products and by-products from the anaerobic digester established under the project activity are stored on-site under anaerobic conditions.
<p>Important parameters</p>	<p>Monitored:</p> <ul style="list-style-type: none"> • Amount of methane produced in the anaerobic digester before upgrading; • Amount of biogenic methane which is sent to the natural gas distribution system after upgrading.
<p>BASELINE SCENARIO Supply of natural gas to a natural gas distribution system.</p>	 <p>The baseline scenario flowchart shows a linear process: 'Natural gas' (represented by a flame icon) is supplied to a 'Natural gas' distribution system (flame icon), which then provides gas to a 'Consumer' (factory icon). The consumer produces 'CO2' (flame icon).</p>
<p>PROJECT SCENARIO Organic waste is treated by anaerobic digestion. The resulted output is upgraded and used to replace natural gas in a natural gas distribution system.</p>	 <p>The project scenario flowchart shows a multi-step process: 'Waste' (trash icon) is sent to 'Treatment' (factory icon), producing 'Biogas' (flame icon). Biogas goes to 'Processing' (factory icon), producing 'CH4' (flame icon). CH4 is then converted into 'Natural gas' (flame icon), which is distributed to a 'Consumer' (factory icon). A crossed-out 'Natural gas' icon and a crossed-out 'CO2' icon are shown, indicating that natural gas supply and CO2 emissions are reduced compared to the baseline.</p>

ACM0025 Construction of a new natural gas power plant

<p>Typical project(s)</p>	<p>Installation of a natural-gas-fired power plant that supplies electricity to a grid and/or an existing facility that is also connected to the grid.</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Low carbon intensive electricity generation. <p>Displacement of electricity that would be provided by more-carbon-intensive means.</p>
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • If the project activity power plant co-generates heat, no emission reductions can be claimed for the generated heat; • Natural gas is sufficiently available in the region or country; • In case electricity is supplied to an existing facility: the sources of electricity as well as average historical energy consumption should be presented in the CDM-PDD, and the electricity is supplied through a dedicated electric line.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Emission factor of baseline electricity, derived from: <ol style="list-style-type: none"> (i) An emission factor of the power grid; (ii) The power generation technology that would most likely be used in the absence of the project, or the one currently used at the existing facility. <p>Monitored:</p> <ul style="list-style-type: none"> • Fuel consumption of the project power plant; • Electricity supplied to the electric power grid and/or an existing facility.
<p>BASELINE SCENARIO Power generation using:</p> <ol style="list-style-type: none"> 1. Natural gas, but with different technologies than the project, 2. Fossil fuels other than natural gas or renewable energy. 	 <p>The diagram illustrates the baseline scenario. On the left, a 'Fossil fuel' icon (flame) has an arrow pointing to a box containing 'Grid' and 'Power plant' icons. From this box, two arrows branch out: one to an 'Electricity' icon (lightning bolt) and another to a 'CO2' icon (flame). The 'Electricity' icon has an arrow pointing to a box containing 'Electricity' and 'Consumer' icons. From this box, an arrow points to another 'CO2' icon.</p>
<p>PROJECT SCENARIO Power supply to the grid and/or an existing facility by a new natural-gas-fired power plant.</p>	 <p>The diagram illustrates the project scenario. On the left, a 'Natural gas' icon (flame with 'H') has an arrow pointing to a 'Power plant' icon. Below it, a 'Fossil fuel' icon (flame) and a 'Power plant' icon are crossed out with a large 'X'. From the 'Power plant' icon, two arrows branch out: one to an 'Electricity' icon (lightning bolt) and another to a 'CO2' icon (flame). The 'Electricity' icon has an arrow pointing to a box containing 'Electricity' and 'Consumer' icons. From this box, an arrow points to another 'CO2' icon, which is also crossed out with a large 'X'.</p>

ACM0026 Fossil fuel based cogeneration for identified recipient facility(ies)

<p>Typical project(s)</p>	<p>Construction and operation of a fossil fuel cogeneration plant that supplies electricity and heat to a consuming facility(ies).</p>
<p>Type of GHG emissions mitigation action</p>	<ul style="list-style-type: none"> • Energy efficiency. • Technology switch.
<p>Important conditions under which the methodology is applicable</p>	<ul style="list-style-type: none"> • The electricity and heat requirement of the facility that the project cogeneration plant supplies to (consuming facility) would be generated in separate systems in the absence of the project; • All recipient facilities, existing and Greenfield, shall be clearly identified prior to the implementation of the project activity. Where the project participant plans to claim emission reductions from the electricity supplied to the grid, the grid may be considered as one single recipient facility.
<p>Important parameters</p>	<p>At validation:</p> <ul style="list-style-type: none"> • Fuel consumption for heat supply by the existing heat-only generation units; • Electricity generation by the grid or the existing power-only generation units; • Emission factor of the grid or the existing power-only generation units. <p>Monitored:</p> <ul style="list-style-type: none"> • Fossil fuel consumption by the project cogeneration plant; • Electricity supplied by the project cogeneration plant to the consuming facility; • Heat supplied by the project cogeneration plant to the consuming facility.
<p>BASELINE SCENARIO The electricity demand of a facility(ies) is satisfied via either power-only generation units, or the grid and heat from heat-only generation units.</p>	 <p>The diagram illustrates the baseline scenario. On the left, three boxes labeled 'Fossil fuel' with flame icons have arrows pointing to three boxes: 'Grid' (with a plug icon), 'Power plant' (with a lightning bolt icon), and 'Heat' (with a thermometer icon). Arrows from 'Grid' and 'Power plant' point to a box labeled 'Electricity' (with a lightning bolt icon). An arrow from 'Heat' points to a box labeled 'Heat' (with a thermometer icon). Both 'Electricity' and 'Heat' boxes have arrows pointing to a box labeled 'Consumer' (with a factory icon). An arrow from the 'Consumer' box points to a box labeled 'CO2' (with a flame icon).</p>
<p>PROJECT SCENARIO The recipient facility(ies) is supplied electricity and heat from a fossil fuel based cogeneration plant.</p>	 <p>The diagram illustrates the project scenario. On the left, three boxes labeled 'Fossil fuel' with flame icons and one box labeled 'Natural gas' with a flame icon and an 'H' are shown. The 'Fossil fuel' boxes have arrows pointing to 'Grid', 'Power plant', and 'Heat' boxes, which are all crossed out with a large 'X'. An arrow from the 'Natural gas' box points to a box labeled 'Cogeneration' (with a lightning bolt and 'e' icon). Arrows from 'Cogeneration' point to 'Electricity' (with a lightning bolt icon) and 'Heat' (with a thermometer icon) boxes. Arrows from 'Electricity' and 'Heat' point to a 'Consumer' (with a factory icon) box. An arrow from the 'Consumer' box points to a 'CO2' (with a flame icon) box. The 'CO2' box is crossed out with a large 'X'.</p>