

Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories

TYPE III - OTHER PROJECT ACTIVITIES

Project participants shall take into account the general guidance to the methodologies, information on additionality, abbreviations and general guidance on leakage provided at <http://cdm.unfccc.int/goto/SSCclar>.

III.U. Cable Cars for Mass Rapid Transit System (MRTS)

Technology/Measure:

1. This category comprises cable cars substituting traditional road based transport trips.
2. The calculation of baseline and project emissions is based on total emissions from trip origin (O) to trip destination (D) using distinctive modes of transport^{1, 2}.
3. The methodology is applicable to project activities that reduce emissions through the construction and operation of cable cars. The following applicability conditions apply:
 - (a) A new cable car is built. Extensions of existing cable cars are not eligible;
 - (b) Cable cars are only for passenger transport; the passenger performs partial or total trip on the cable car;
 - (c) Cable cars are established as a means of mass transit. The cable car must be built in an area that is accessible by road (origin and final destination of the cable car);
 - (d) The methodology is applicable if fuels used in the baseline and or project case are electricity, gaseous or liquid fossil fuels. If Bio fuel blends are used as liquid fuels, the specific fuel consumption value and emission factors used for determining baseline and project emissions shall be adjusted accordingly.
 - (e) The methodology is applicable if the analysis of possible baseline scenario alternatives leads to the result that a continuation of the current public transport system is the scenario that reasonably represents the anthropogenic emissions by sources of greenhouse gases (GHG) that would occur in the absence of the proposed project activity (i.e. the baseline scenario).
4. Measures are limited to those that result in emission reductions of less than or equal to 60 kt CO₂e annually.

¹ Modes of transport refer to vehicle categories that passengers use for transit purposes. No sub-categories apply i.e. buses and water-based urban transport means are not differentiated according to size. Also no differentiation is made according to fuel type used.

² Vehicle categories are the vehicles used for passenger transport in the baseline or the project case including *inter alia* buses (sub-categories of buses might exist in the city; sub-categories are made according to bus carrying capacity of passengers i.e. bus size), passenger cars, taxis, motorcycles, motorized rickshaws, bikes, rail-based transport systems (metro, urban rail, LTR, tram etc) or urban water-based transport (different sub-categories might apply). Vehicle categories are differentiated according to fuels used (electricity, gaseous fuels (LPG, CNG, LNG), gasoline and diesel).

Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

Project Boundary

5. The spatial extent of the project boundary is the geographical area of trips of passengers using the cable car.
6. If electricity is sourced from an interconnected grid for the operation of the transport system, the project boundary also includes the power plants physically connected to the grid supplying power to the project. In this regard the guidance in “Tool to calculate baseline, project and/or leakage emissions from electricity consumption” shall be followed.
7. Only CO₂ emissions from liquid fuels are considered for calculation of project and baseline emissions while for gaseous fuels CH₄ is included in addition to CO₂. N₂O emissions are not included.

Baseline Emissions


8. The baseline is determined by assessing alternatives to public transport in the project region including *inter alia* a continuation of the current situation and the project realized without the CDM.
9. GHG emission reductions are achieved through an improved efficiency of transporting passengers with the cable car compared to the traditional transport mode that passengers would have used in absence of the project activity. The indicator used to demonstrate and calculate emission reductions is emissions per passenger-kilometre (PKM). That is, the project emissions per PKM are compared to the baseline emissions per PKM. The methodology assumes that the passengers do not change origin and destination of their trip except in the case of induced trips³, which would not have occurred in absence of the project. Latter is taken into consideration with the survey described in the annex. However, the project may change trip structures including the modes used or the total trip distance.
10. Baseline emissions are those that would have been caused by passengers using the cable car using baseline modes of transport. The baseline emissions include total trip emissions of project passengers from their trip origin to their trip destination.

³ Passengers (such as tourists) that may have been induced to travel because of the existence of the project activity and those trips are seasonal

Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

Graph 1: Baseline and Project Emissions

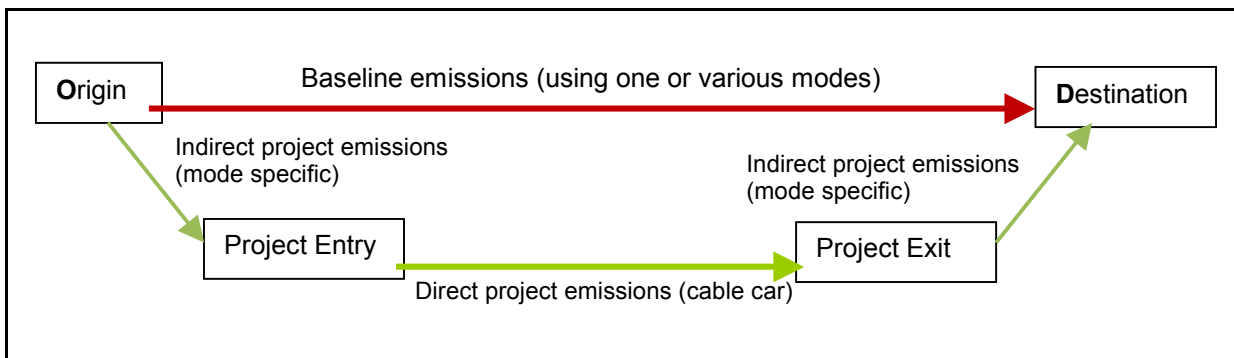

11. To calculate baseline emissions, the relevant vehicles categories (e.g. buses, taxis, motorcycles) in the baseline have to be identified in a first step. Vehicle categories not common in the project boundary can be excluded. In the next step, the emission factor per passenger kilometre for each vehicle category is determined. This is calculated *ex ante* and includes a fixed technology-improvement factor per vehicle category.

12. GHG emission per kilometre for each vehicle category is calculated *ex ante* and remains fixed for the project period. It is a value based on specific fuel consumption data of the respective category and it is annually updated according to the technology improvement factor per vehicle category⁴.

Formula (1): Emission factor per Kilometre per vehicle category

$$EF_{KM,i} = \sum_x \left[SFC_{x,i} \times NCV_x \times EF_{CO_2,x} \times \frac{N_{x,i}}{N_i} \right] \times IR_i^t \tag{1}$$

Where:

- $EF_{KM,i}$ Emission factor per kilometre of vehicle category *i* (grCO₂/km)
- $SFC_{x,i}$ Specific fuel consumption of vehicle category *i* using fuel type *x* prior project start (gr/km)
- NCV_x Net calorific value of fuel *x* (J/gr)
- $EF_{CO_2,x}$ Carbon emission factor for fuel type *x* (grCO₂/J)
- $N_{x,i}$ Number of vehicles of category *i* using fuel type *x* prior project start (units)

⁴ Introduction of technology improvement factor is due to the fact that under business as usual conditions emission factors per vehicle category per fuel type may change due to: a) Vehicles are replaced with more efficient ones; b) Vehicles in stock tend to increase emissions based on wear and tear.

**Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories**

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

N_i	Number of vehicles of category i prior project start (units)
IR_i^t	Technology improvement factor for the vehicle of category i per year t . The improvement rate is applied to each calendar year. The default value of the technology improvement factor for all vehicle categories is fixed as 0.99
t	Year counter for the annual improvement (dependent on age of data per vehicle category)

13. If various sub-categories of buses exist (e.g. small, medium, large units) the emission factor is calculated per sub-category.

14. For vehicles using electricity, the associated emissions shall be estimated in accordance with “Tool to calculate baseline, project and/or leakage emissions from electricity consumption”

15. The emission factor for each mode of transport i.e., emissions per PKM should be reassessed for each new crediting period. This may require studies or reliable up to date literature data (e.g., specific fuel consumption and occupation rate studies) in order to reflect the new situation in the corresponding city.

16. Two alternatives are proposed to determine specific fuel consumption (in the order of preference):

- Alternative 1: Determination of fuel consumption data using the data from the entire fleet e.g. the data from bus or taxi companies or from a representative sample for the respective vehicle category and fuel type. Sampling units per category and fuel should be representative of the below core characteristics to ensure that the sample is as close as possible to the actual vehicle composition of the city;
 - Vehicle sub-categories if relevant (e.g. Jeeps, Pick-Ups);
 - Vehicle age and motorization⁵;
 - To be conservative, fuel consumptions based on samples shall be based on the lower end of uncertainty band at a 95% confidence level i.e. with 95% probability that the actual average fuel consumption is equal to or higher than the value used by the project.
- Alternative 2: Use of fixed values based on national or international literature. The literature data shall be either based on measurements of similar vehicles in comparable surroundings (e.g. from comparable cities of other countries) or based on identification of the vehicle age and technology of representative vehicles circulating in the project city and then matching the identified categories with the most appropriate IPCC default values. The most important proxy to identify vehicle technologies is the average age of vehicles used in the zone of influence of the

⁵ Vehicle age and technology (related often to emission standards such as Euro standards) are factors, which influence to a significant extent the fuel consumption. This is recognized e.g. by IPCC default factors which are characterized according to age and technology.

**Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories**

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

project. To determine if US, Japanese or European default factors apply, either the local vehicle manufacturer information can be used (if a domestic motor vehicle industry with significant market share is prevalent) or the information from the source of origin of vehicle imports is used.

Table 1: Default Emission Factors for CH₄ Emissions of Vehicles Using Gaseous Fuels (grCO₂e per km)

Vehicle category	grCO ₂ e per km	Source
Buses CNG up to Euro 4	113	IPCC 2006 table 3.2.5
Buses CNG Euro 4 or later	19	IPCC 2006 table 3.2.5
Light duty vehicles CNG	10	IPCC 2006 table 3.2.4 (average of upper and lower level)
Light duty vehicles LPG	2	IPCC 2006 table 3.2.5 (urban cycle)

17. The emissions per passenger for each vehicle category are determined as per the below guidance. All data used is determined ex-ante. A change in the average occupancy rate of the identified vehicles is registered as leakage of the project.

Formula (2): Emissions per PKM

$$EF_{PKM,i} = \frac{EF_{KM,i}}{OC_i} \quad (2)$$

Where:

$EF_{PKM,i}$ Emission factor per passenger-kilometre of vehicle category i (grCO₂/PKM)

$EF_{KM,i}$ Emission factor per kilometre of vehicle category i (grCO₂/km)

OC_i Average occupation rate of vehicle category i prior project start (passengers)⁶

18. The baseline emissions for all passengers transported by the project are calculated using following steps:

Step 1: Survey

19. Baseline emissions cover the entire emissions, which would have been caused by the project passenger in absence of the project from his trip origin to his trip destination using potentially various modes of transport for segments of his trip. A representative sample survey of passengers using the project transport system shall be conducted four times a year (once every quarter) to capture potential seasonal effects of passenger transport. The average value of the four (4) surveys is taken. The surveys should commence no later than six months from the commissioning of the project. The surveys are conducted only for one year and are not repeated yearly. The principles for conducting the survey as well as a default survey template are found in

⁶ In the case of taxis the driver is not included.

**Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories**

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

the annex. The key objective of the survey is to identify how project passengers would have made the trip in absence of the project i.e. what mode(s) of transport they would have used over the distances to reach their trip destination. The origin (O) and destination (D) of the trip is assumed to be equal in the baseline and in the project case with the exception of induced traffic which is included only as project trip contributing to project emission but not included in the baseline trips. The trip distance and the modes used between O and D are however different in the baseline than in the project case. To fully capture all potential changes, the methodology thus compares emissions per O-D trip of the baseline with emissions per O-D trip of the project.

Step 2: Determine Average Trip Distance per Mode of Transport

20. Calculate the average trip distance for each mode of transport. To ensure a conservative approach, the average trip distance per mode shall be at the lower end of uncertainty band at a 95% confidence level⁷. All calculations are made separately for each survey.

Step 3: Total baseline emissions per year

21. Total baseline emissions are determined by multiplying the average trip distance per mode with the respective emission factor for this mode multiplied with the number of passengers who would have used the respective mode.

Formula (3): Total Baseline Emissions

$$BE_y = \frac{\sum_s \sum_i P_{BL,i,s,y} \times TD_{BL,i,s,y} \times EF_{PKM,i}}{10^6} \quad (3)$$

Where:

BE_y	Baseline emissions in the year y (tCO ₂ e)
$P_{BL,i,s,y}$	Passengers transported by the project in the quarter s of the year y who would have used mode i in the baseline (passengers)
$TD_{BL,i,s,y}$	Average trip distance of passengers who would have used mode i in the baseline in the quarter s of the year y (kilometer)
$EF_{PKM,i}$	Emission factor per passenger-kilometre of vehicle category i (grCO ₂ /PKM)
\sum_s	Sum of the four (4) surveys realized

Formula (4): Baseline Passengers per Mode

$$P_{BL,i,s,y} = P_{s,y} \times SP_{BL,i,s,y} \quad (4)$$

⁷ This means there is 95% probability that the actual average trip distance per mode is equal to or higher than the value used by the project

Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)


Where:

- $P_{BL,i,s,y}$ Passengers transported by the project in the quarter s of the year y who would have mode i in the baseline (passengers)
- $P_{s,y}$ Passengers transported by the project in the quarter s of the year y (passengers)
- $SP_{BL,i,s,y}$ Share of passengers transported by the project in the quarter s of the year y who would have used mode i in the baseline (%)

Project activity emissions

22. Project emissions are based on the fuel and/or electricity consumed by the project multiplied with the respective GHG emission factor. Indirect emissions caused by project passengers from their trip origin to the project entry station and from the project exit station to the final trip destination are taken into account.

Graph 2: Direct and Indirect Project Emissions

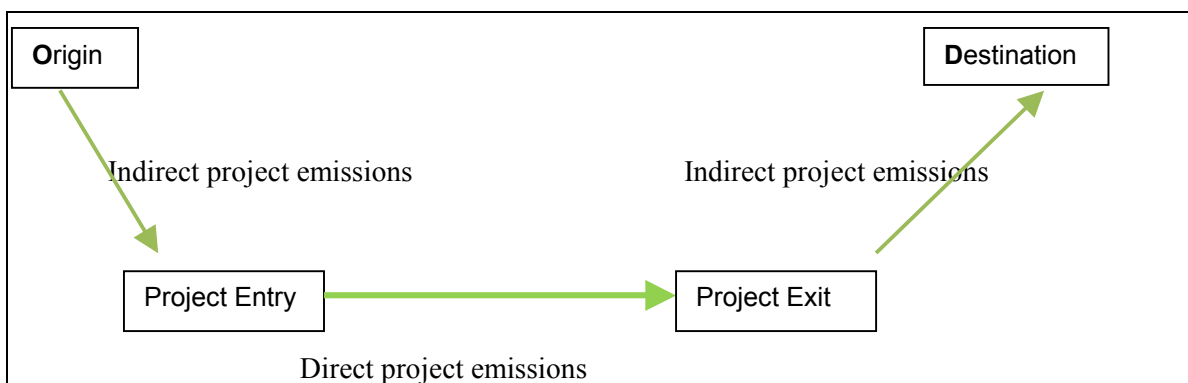

23. Direct project emissions (DPE) are based on the electricity consumption of the cable car calculated as per the procedures of “Tool to calculate baseline, project and/or leakage emissions from electricity consumption”.

24. Indirect project emissions (IPE) are those caused by passengers from their origin point up to the project entry station and from the project exit station up to the final trip destination. The survey realized identifies the origin, project entry station, project exit station and the final destination of the passenger plus the modes used between the different points e.g. bike from origin to project entry station and metro from project exit station to final destination. The distances between origin and entry and between exit and destination are calculated based e.g. on electronic maps and GPS (identical to baseline trip determination) or on actual trip routes of modes of transport used (e.g. bus routes, metro routes).

25. The following steps are followed to calculate the indirect project emissions:

**Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories**

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

Step 1: Survey

26. A representative sample survey of passengers using the project transport system shall be conducted four times a year (once every quarter) to capture potential seasonal effects of passenger transport and the average value of the four (4) surveys is taken. The surveys should commence no later than six months from the commissioning of the project. The surveys are conducted only for one year and are not repeated yearly. The principles for conducting the survey as well as a default survey template are found in the annex. The survey objective is to identify what modes of transport passengers actually used from trip origin to project entry station and from project exit station to trip destination as well as the determination of the distances involved. The origin and destination of the trip is assumed to be equal for the baseline as for the project case with exception of induced traffic which is included only as a project trip and not included as baseline trip.

Step 2: Indirect trip distance per mode per passenger surveyed

27. Calculate the average indirect project trip distance for each mode of transport. To ensure a conservative approach, the average indirect project trip distance per mode shall be at the higher end of uncertainty band at a 95% confidence level⁸.

Step 3: Total indirect project emissions

Formula (5): Indirect Project Emissions

$$IPE_y = \frac{\sum_s \sum_i P_{PJ,i,s,y} \times TD_{PJ,i,s,y} \times EF_{PKM,i}}{10^6} \quad (5)$$

Where:

IPE_y Indirect project emissions in the year y (tCO₂e)

$P_{PJ,i,s,y}$ Number of passengers transported by the project in the quarter s of the year y using mode i for trips to and from the project system (passengers)

$TD_{PJ,i,s,y}$ Average trip distance of passengers using mode i in the quarter s of the year y to and from the project system (kilometer)

$EF_{PKM,i}$ Emission factor per passenger-kilometre of vehicle category i (grCO₂/PKM)

\sum_s Sum of the four (4) quarterly surveys realized

Formula (6): Passengers per Mode

$$P_{PJ,i,s,y} = P_{s,y} \times SP_{PJ,i,s,y} \quad (6)$$

⁸ This ensures that there is 95% probability that the actual average indirect project trip distance per mode is equal to or lower than the value used by the project.

**Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories**

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

Where:

- $P_{PJ,i,s,y}$ Passengers transported by the project in the quarter s of the year y using mode i for trips to and from the project system (passengers)
- $P_{s,y}$ Passengers transported by the project in the quarter s of the year y (passengers)
- $SP_{PJ,i,s,y}$ Share of passengers transported by the project in the quarter s of the year y using mode i to and from the project systems (%)

28. Total project emissions are the sum of indirect and direct project emissions.

Formula (7): Total Project Emissions

$$PE_y = DPE_y + IPE_y \quad (7)$$

Where:

- PE_y Project emissions in the year y (tCO₂e)
- DPE_y Direct project emissions in the year y (tCO₂e)
- IPE_y Indirect project emissions in the year y (tCO₂e)

Leakage

29. For the sake of a conservative approach, leakage is only considered if the total annual effect is to reduce estimated emission reductions.

- (a) Upstream emissions related to Construction of project transport system (e.g., emissions from production of cement, steel and materials used in the cable car system)
- (b) Any significant (+10% or higher) change in the average occupancy rate of each of the vehicle category is considered as leakage of the project. See the monitoring section for the detailed guidance.

Note: The impact of induced traffic (additional trips) provoked through the new transport system is addressed directly in the project emissions and is not part of the leakage. This is addressed by including as project emissions due to the trips of passengers, which, in absence of the cable car project, would not have realized the trip.

Emission reductions

30. Emission reductions are calculated as follows:

$$ER_y = BE_y - PE_y - LE_y \quad (8)$$

Indicative simplified baseline and monitoring methodologies
 for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

Where:

- ER_y Emission reductions in year y (tCO₂e)
- BE_y Baseline emissions in year y (tCO₂e)
- PE_y Project emissions in year y (tCO₂e)
- LE_y Leakage emissions in year y (tCO₂e)

Monitoring

Data and Parameters not monitored

ID Number:	1
Parameter:	SFC _{x,i}
Data unit:	gr/km
Description:	Specific fuel consumed of vehicle category <i>i</i> of fuel type <i>x</i>
Source of data:	In the decreasing order of preference: <ol style="list-style-type: none"> 1. Local measured data not elder than 3 years (studies e.g. conducted by the project proponent or conducted by reputed institutions including relevant department of Universities); 2. National or international data from studies not elder than 3 years; 3. IPCC default values for the respective vehicle categories (latest year).
Measurement procedures (if any):	<p><u>Alternative 1:</u> Determination of fuel consumption data using the data from the entire fleet e.g. the data from bus or taxi companies or from a representative sample for the respective vehicle category and fuel type. Sampling units per category and fuel should be representative of the below core characteristics to ensure that the sample is as close as possible to the actual vehicle composition of the city;</p> <ul style="list-style-type: none"> ○ Vehicle sub-categories if relevant (e.g. Jeeps, Pick-Ups); ○ Vehicle age and motorization⁹; ○ To be conservative, fuel consumptions based on samples shall be based on the lower end of uncertainty band at a 95% confidence level i.e. with 95% probability that the actual average fuel consumption is equal to or higher than the value used by the project. <p><u>Alternative 2:</u> Use of fixed values based on national or international literature. The literature data shall be either based</p>

⁹ Vehicle age and technology (related often to emission standards such as Euro standards) are factors, which influence to a significant extent the fuel consumption. This is recognized e.g. by IPCC default factors which are characterized according to age and technology.

Indicative simplified baseline and monitoring methodologies
 for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

	<p>on measurements of similar vehicles in comparable surroundings (e.g. from comparable cities of other countries) or based on identification of the vehicle age and technology of representative vehicles circulating in the project city and then matching the identified categories with the most appropriate IPCC default values. The most important proxy to identify vehicle technologies is the average age of vehicles used in the zone of influence of the project. To determine if US, Japanese or European default factors apply, either the local vehicle manufacturer information can be used (if a domestic motor vehicle industry with significant market share is prevalent) or the information from the source of origin of vehicle imports is used.</p>
Any comment:	

ID Number:	2
Parameter:	$N_{x,i}$
Data unit:	Vehicles
Description:	Number of vehicles of category i using fuel type x
Source of data:	<ul style="list-style-type: none"> • Municipal or road transport t authorities based on vehicle registration statistics from the respective city; or • Data from vehicle control stations (technical and emission control stations); • If no city/municipal data is available regional data (canton, state) or as the last option national data can be used.
Measurement procedures (if any):	
Any comment:	<p>Used for all vehicle categories included in the project. For buses as well as for taxis informal sector (including vehicle not registered as per legal provisions) may be operating. While estimates on the number of informal units may be available these are due to their nature not trustworthy. For both categories it is thus recommended to only include formally registered units. As the methodology is based on emissions per PKM absolute numbers are not relevant for determining this parameter. It is however important that transported passengers are also based on the official records thus not including passenger trips of informal units.</p>

ID Number:	3				
Parameter:	NCV_x				
Data unit:	J/gr				
Description:	Net calorific value of fuel x				
Source of data:	The following data sources may be used if the relevant conditions apply:				
	<table border="1"> <thead> <tr> <th>Data source</th> <th>Conditions for using the data</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> </tr> </tbody> </table>	Data source	Conditions for using the data		
Data source	Conditions for using the data				

Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

		source
	a) Values provided by the fuel supplier in invoices taken from a sample of gas stations in the city	This is the preferred source if the carbon fraction of the fuel is not provided
	b) Measurements by the project participants taken from a sample of gas stations in the city	If a) is not available
	c) Regional or national default values	If a) is not available These sources can only be used for liquid fuels and should be based on well-documented, reliable sources (such as national energy balances).
	d) IPCC default values at the upper limit of the uncertainty at a 95% confidence interval as provided in Table 1.2 of Chapter 1 of Vol. 2 (Energy) of the 2006 IPCC Guidelines on National GHG Inventories	
Measurement procedures (if any):	For a) and b): Measurements should be undertaken in line with national or international fuel standards.	
Any comment:	The parameter is used for baseline as well as project emissions and vehicle owners or operators can buy fuel from a variety of sources (gas stations). In practice therefore it is considered as simpler to determine the parameter using options c) or d)	

ID Number:	4	
Parameter:	EF _{CO₂,x}	
Data unit:	grCO ₂ /J	
Description:	CO ₂ emission factor for fuel type x	
Source of data:	The following data sources may be used if the relevant conditions apply:	
	Data source	Conditions for using the data source
	a) Values provided by the fuel supplier in invoices taken from a sample of gas stations in the city	This is the preferred source
	b) Measurements by the project participants taken from a sample of gas stations in the city	If a) is not available
	c) Regional or national default values	If a) is not available These sources can only be used for liquid fuels and should be

Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

		based on well documented, reliable sources (such as national energy balances)
	d) IPCC default values at the upper limit of the uncertainty at a 95% confidence interval as provided in Table 1.4 of Chapter 1 of Vol. 2 (Energy) of the 2006 IPCC Guidelines on National GHG Inventories	
Measurement procedures (if any):	For a) and b): Measurements should be undertaken in line with national or international fuel standards. For a): If fuel suppliers provide the NCV value and the CO ₂ emission factor on the invoices and these two values are based on measurements for this specific fuel, this CO ₂ factor should be used. If another source for the CO ₂ emission factor is used or no CO ₂ emission factor is provided, options b), c) or d) should be used	
Any comment:	The parameter is used for baseline as well as project emissions and vehicle owners or operators can buy fuel from a variety of sources (gas stations). In practice therefore it is considered as simpler to determine the parameter using options c) or d)	

ID Number:	5
Parameter:	OC_i
Data unit:	Passengers
Description:	Average occupation rate of vehicle category <i>i</i>
Source of data:	Municipal transport authorities or specific studies done by the project proponent or a third party; Vintage maximum 3 years
Measurement procedures (if any):	Based on visual occupation studies for all vehicle categories. For buses the occupation rate is based on boarding-alighting studies, electronic smart tickets or on visual occupation studies with expansion factors for routes served to determine the average occupation rate along the entire route.
Any comment:	In the case of taxis the driver is not counted

ID Number:	6
Parameter:	DD_B
Data unit:	Kilometres
Description:	Total distance driven of buses of various sub-categories prior project start (kilometre)
Source of data:	Data from bus companies (company records), municipal transport authorities or specific studies done by the project proponent or a third party. Vintage maximum 3 years

Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

Measurement procedures (if any):	Distance driven of buses is often recorded by bus companies based on odometer reading. Preferable is GPS or other electronic means, however this is not yet common practice with bus companies. Data can also be based on sample measurements based on daily distance driven (measured by odometer or GPS) plus the average number of operation days of a bus (based on bus operator information). The total distance driven for all buses is the multiplication of average annual distance driven per bus and the number of registered buses operating in the city (see ID 2)
Any comment:	This data is required if various sub-categories of buses operate

ID Number:	7
Parameter:	EC_R
Data unit:	kWh
Description:	Quantity of electricity consumed by the baseline rail based transit system
Source of data:	Rail system operator; last available year
Measurement procedures (if any):	If various rail systems exist (e.g. metro, tram) data has to be collected for each system. Only include electricity used to move trains (not e.g. for lighting, traffic signals).
Any comment:	Required if the city has rail based transit systems

ID Number:	8
Parameter:	EF_{Grid}
Data unit:	kgCO ₂ /kWh
Description:	Emission factor for the grid
Source of data:	Official data; follow procedures as in “Tool to calculate the emission factor for an electricity system”; same year as ID 7
Measurement procedures (if any):	Follow procedures in “Tool to calculate the emission factor for an electricity system”
Any comment:	

ID Number:	9
Parameter:	P_R
Data unit:	Passengers
Description:	Total passengers transported by baseline rail based transit system per year
Source of data:	Rail operator; same year as ID 7
Measurement procedures (if any):	Based on turnpike or electronic ticketing system; Cross check with ticket sales where possible
Any comment:	Required if the city has rail based transit systems as PKM for rail based systems is calculated in general based on total passengers and average trip distance instead of average occupation rate

Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

ID Number:	10
Parameter:	TD_{PR}
Data unit:	Kilometres
Description:	Average trip distance of urban rail based transit passengers
Source of data:	Rail operator; same year as ID 7 preferable
Measurement procedures (if any):	Based in general on electronic ticketing system or on surveys
Any comment:	Only rail trip distance not total trip distance; Required if the city has rail based transit systems as PKM for rail based systems is calculated in general based on total passengers and average trip distance instead of average occupation rate

Data and Parameters monitored

Data / Parameter:	P
Data unit:	Passengers
Description:	Total passengers transported by the project
Source of data:	Cable car operator
Measurement procedures (if any):	Based on electronic (e.g. electronic smart cards) or mechanical control means (e.g. turnpikes at stations)
Monitoring frequency:	Continuously, aggregated at least per quarter
QA/QC procedures:	Control with ticket sales
Any comment:	For passenger numbers controls must be based on counting physically passengers e.g. through electronic smart cards or mechanical entry control units. Systems operating only with tickets valid for 1 ride can also use ticket sales. Systems operating however without multiple ticket entry (e.g. monthly card allowing the user indiscriminate usage of the system) must have entry control units to count the number of passengers. In case of such systems ticket sales only offer an approximation of passengers using the system, appropriate for QA/QC.

Data / Parameter:	$SP_{BL,i,s}$
Data unit:	%
Description:	Share of passengers in the quarter s of the respective year who would have used the baseline mode i
Source of data:	Cable car operator
Measurement procedures (if any):	Based on survey (see details below)
Monitoring frequency:	Continuously, aggregated at least per quarter
QA/QC procedures:	The survey is realized at a 95% confidence interval with a maximum 5% error margin
Any comment:	See below survey principles

Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

Data / Parameter:	SP _{PJ,i,s}
Data unit:	%
Description:	Share of passengers using the project mode <i>i</i> in the quarter <i>s</i> of the respective year from trip origin to the project entry station and from project exit station to their final destination
Source of data:	Cable car operator
Measurement procedures (if any):	Based on survey (see details below)
Monitoring frequency:	Continuously, aggregated at least per quarter.
QA/QC procedures:	The survey is realized at a 95% confidence interval with a maximum 5% error margin
Any comment:	See below survey principles

Data / Parameter:	TD _{BL,i,s}
Data unit:	Kilometre
Description:	Trip distance of passengers using in the baseline mode <i>i</i> in the quarter <i>s</i> of the respective year
Source of data:	Cable car operator
Measurement procedures (if any):	Based on survey (see details below)
Monitoring frequency:	Continuously, aggregated at least per quarter
QA/QC procedures:	The survey is realized at a 95% confidence interval with a maximum 5% error margin. To ensure a conservative trip distance and thus conservative baseline emissions the lower boundary of the 95% confidence interval for the trip distance is taken i.e. this ensures that with 95% probability the actual trip distance baseline is equal to or higher than the trip distance taken for project baseline emission calculations.
Any comment:	See below survey principles

Data / Parameter:	TD _{PJ,i,s}
Data unit:	Kilometre
Description:	Trip distance of passengers using in the project mode <i>i</i> in the quarter <i>s</i> of the respective year from their trip origin to the project entry station and from the project exit station to their final destination
Source of data:	Cable car operator
Measurement procedures (if any):	Based on survey (see details below)
Monitoring frequency:	Continuously, aggregated at least per quarter

Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

QA/QC procedures:	The survey is realized at a 95% confidence interval with a maximum 5% error margin. To ensure a conservative trip distance and thus conservative project emissions the upper boundary of the 95% confidence interval for the trip distance is taken i.e. this ensures that with 95% probability the actual trip distance project to/from the project is equal to or lower than the trip distance taken for indirect project emission calculations.
Any comment:	See below survey principles

Data / Parameter:	EC_{P,i}
Data unit:	kWh
Description:	Quantity of electricity consumed by the cable car for traction
Source of data:	Cable car operator
Measurement procedures (if any):	Calibrated meters
Monitoring frequency:	Continuously, aggregated at least annually
QA/QC procedures:	Cross check measurement results with invoices for purchased electricity
Any comment:	

Parameter:	Occupancy rate of vehicle category i
Data unit:	Passengers
Description:	Any significant (+10% or higher) change in the average occupancy rate of each of the vehicle category is considered as leakage of the project
Source of data:	Specific studies done by the project proponent or a third party
Measurement procedures (if any):	Before project start plus specified intervals thereafter
Any comment:	The occupancy rate of different vehicle categories is monitored through representative samples. If results show increases in occupancy rates > 10 % in the load factor, this change is included in the leakage calculation for all years since the last monitoring of the load factor. Recommended interval: year 3, 6 and 10 for 10-year crediting period; year 3 and 7 for 7-year crediting period. Details of Load Factor Study The frequency of the load study is: <ul style="list-style-type: none"> ▪ If 100% of the project is implemented at the start: Year 2 to monitor short-term response of vehicle categories to the MRTS and years 5 and 10 to monitor medium-term response. Data of year 2 is used for years 3-5 and data of year 5 for rest of crediting period. To monitor the occupancy rate of the vehicle categories every year is not considered as necessary, as changes are expected either in the first years (short-term response) or then in the medium-term. In between only incremental annual changes are expected which would not justify the considerable expenses

Indicative simplified baseline and monitoring methodologies
 for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

	<p>for realizing such surveys.</p> <ul style="list-style-type: none"> ▪ With gradual project implementation monitoring years may vary. It is proposed to monitor at a minimum every 3 years e.g. year 3, 6 and 10. If the load factor reduces less than 10 percentage points no leakage is included. If the load factor reduces by more than 10 percentage points relative to the measurement before project start (benchmark) then leakage is calculated and included. In this case the amount of leakage is the cumulative sum of all years since the last load factor survey was realized assuming that the reduction of the load factor occurred immediately since the last survey.
--	--

Project activity under a programme of activities

The proposed methodology is not applicable to project activities under a programme of activities.

**Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories**

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

Annex

SURVEY PRINCIPLES AND DEFAULT SURVEY

1. The following survey principles shall be followed:
 - (a) The sampling size is determined by the 95% confidence interval and the 5% maximum error margin;
 - (b) Sampling must be statistically robust and relevant i.e. the survey has a random distribution and is representative of the persons using the project transport system;
 - (c) For each cable car line a separate survey needs to be realized;
 - (d) The method to select persons for interviews is random;
 - (e) Only persons over age 12 are interviewed;
 - (f) The survey is realized on all week days including weekends with the sample size per day being proportional to the number of passengers transported by the project per corresponding week day;
 - (g) The sample size for upward journey and downward journey in the cable car must be proportional to the number of passengers transported upwards/downwards on the cable car;
 - (h) The PDD must contain the design details of the survey;
 - (i) A representative sample survey of passengers using the project transport system shall be conducted four times a year (once every quarter) to capture potential seasonal effects of passenger transport and the average value of the four (4) surveys is taken. The surveys should commence no later than six months from the commissioning of the project. The surveys are conducted only for one year and are not repeated.

2. A default questionnaire to be used is included below. This questionnaire should be used by all projects except if valid arguments exist to change the questionnaire and to adapt it to local circumstances. The questionnaire must be realized in the local language.

Indicative simplified baseline and monitoring methodologies
 for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

Default Survey

Interviewer:.....
 Date:.....
 Time:.....
 Point (station) where the interview was performed:.....
 Identification of cable car line:.....

Question 1

“Describe the trip you are currently realizing”

- 1.1. Your trip origin (starting point, e.g. my home):.....
- 1.2. Your entry (boarding) station cable car (name of station):.....
- 1.3. Your exit (de-boarding) station cable car (name of station):.....
- 1.4. Your final trip destination (final point, e.g. office):.....


Explanations for the interviewer:

- *The question refers to the current trip the passenger is making.*
- *If the passenger has walked less than 10 minutes between trip origin and boarding the cable car the two points are considered as identical and 1.1. can be filled in with “identical to the project entry station”.*
- *If the passenger will walk less than 10 minutes between leaving the cable car until reaching his final destination the two points are considered as identical and 1.4. can be filled in with “identical to the project exit station”.*
- *The trip origin and the trip destination must be identified with a clear address. Use a map if it is unclear. If the person does not know or does not want to disclose this information then stop at this point. The questionnaire is deemed thereafter as non-valid.*
- *The cable car stations identified in 1.2 and 1.3. must be listed with their official names.*
- *Only urban trips are considered. If the passenger has as trip origin or trip destination a point outside the city boundaries then discontinue the interview. The questionnaire is deemed thereafter as non-valid.*

Indicative simplified baseline and monitoring methodologies
 for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

Graph 1: Passenger Trip Actually Made

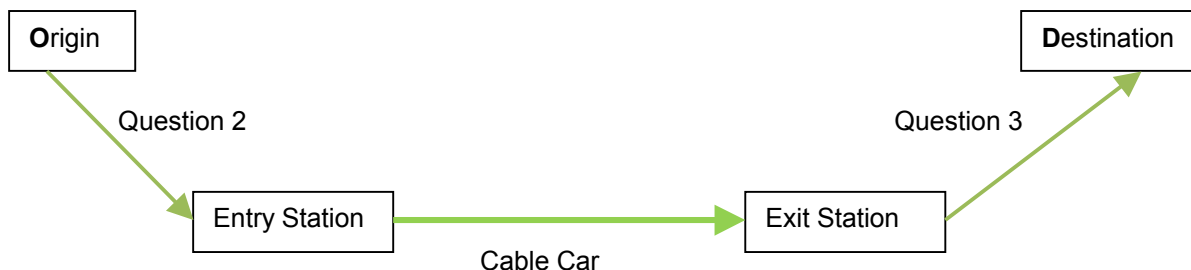

Calculation of result by interviewer or 3rd party:

1. Distance in meters origin to project entry station (if not identical):.....
2. Distance calculation based on:.....
3. Distance in meters from project exit station to destination (if not identical):.....
4. Distance calculation based on:.....

If 1.1. and 1.2. are different, then go to question 2; otherwise continue with question 3.

Question 2

“What mode of transport did you use from your trip start to the cable car? Please refer to the mode on which you performed the longest stretch if you used various modes”

- Bus Rail/Metro/Tram Taxi Passenger car Motorcycle Taxi tri-cycle Bike or per foot

Explanations for the interviewer:

- See graph 1 for explanation
- Rail refers to metro, urban rail, tram etc
- Only tick 1 answer (the mode used for the longest stretch of this trip segment)

If 1.1. and 1.4. are different, then go to question 3; otherwise continue with question 4.

Question 3

“What mode of transport will you use from the point where you leave the cable car until your final destination? Please refer to the mode on which you will perform the longest stretch if you intend to use various modes”

Indicative simplified baseline and monitoring methodologies
 for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

- Bus Rail/Metro/Tram Taxi Passenger car Motorcycle Taxi tri-cycle Bike or per foot

Explanations for the interviewer:

- See graph for explanation
- Rail refers to metro, urban rail, tram etc
- Only tick 1 answer (the mode used for the longest stretch of this trip segment)

Question 4

“Assuming that the cable car you are currently using would not exist: Would you have made the trip you are currently doing anyway or would you have stayed at home/office/origin”

- I would have made the trip I would have stayed at home/office/origin

For the interviewer:

- The purpose of this question is to know if the passenger made this trip only because the cable car exists. In absence of the cableway the passenger would not have made any trip and would have stayed at his point of origin.

If you would have made the trip continue with question 5; otherwise the questionnaire is terminated.

Question 5

“Assuming that the cable car you are currently using would not exist: Would you have used 1 or various modes of transport for your entire trip from origin to destination?”

- I would have used 1 mode → go to question 6
 I would have used more than 1 mode (e.g. taxi plus bus)

If you would have used various modes of transport identify the intermediate points where you changed the mode of transport except if between these points you walked less than 10 minutes. Example: From home I would have taken the bus to point XXY and from there I would have taken the taxi to my office.

- a. Origin of trip (identical to 1.1.):.....
- b. Intermediate point 1:
- c. Intermediate point 2:
- d. Destination of trip (identical to 1.4.):.....

Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)


For the interviewer

- *The trip origin and the trip destination are identical to question 1 i.e. they are the actual trip starting point and the actual destination of the passenger you are questioning*
- *We want to know how the passenger would have reached his destination if the cable car would not exist i.e. the passenger should relate how he did this or a comparable trip before existence of the cable car using all other existing modes of transport he normally used.*
- *The trip route between origin and destination can and is usually different. We must reach however the same final destination.*
- *The passenger may have used one or various modes between starting and final point e.g. car plus bus or bus plus metro etc. Each time he would have changed modes we must identify the geographical point where he would have changed modes (23. and 24.)*
- *It is not previewed that more than 2 intermediate points exist (this would mean 3 modes of transport for 1 trip i.e. origin to point 1, point 1 to point 2, point 2 to destination). If the passenger used more modes and thus had more intermediate points these shall be added.*
- *Walking trips of less than 10 minutes are not counted e.g. walking from origin to bus station of less than 10 minutes is not counted as a separate trip.*
- *The points must be identified with a clear address. Use a map if it is unclear. If the person does not know or does not want to disclose this information then stop at this point. The questionnaire is deemed thereafter as non-valid*

Indicative simplified baseline and monitoring methodologies
 for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

Graph 2: Passenger Trip Made Without Existence of Cable Car (examples)

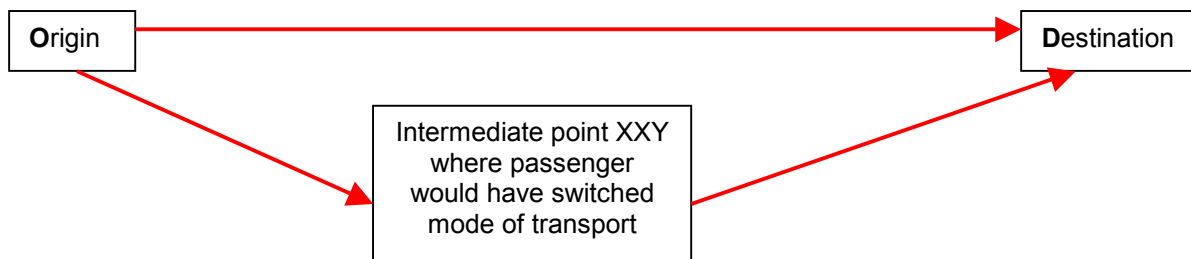

Calculation of result by interviewer or 3rd party:

1. Distance in meters origin to intermediate point:.....
 Distance calculation based on:.....
2. Distance in meters from intermediate point to destination (if not identical):.....
 Distance calculation based on:.....

Idem if various intermediate points exist.

Question 6

“What mode of transport would you have used between each identified point?” Please answer this question for each distance realized separately e.g. origin to XXY and XXY to destination.

Trip segment (based on question 5 e.g. origin to point XXY):.....

Mode I would have used in absence of the cable car for this trip segment:

- Bus Rail/Metro/Tram Taxi → go to 6A Passenger car → got to 6B Motorcycle → go to 6C Taxi tri-cycle → go to 6D Bike or per foot

Explanations for the interviewer:

- See graph 2 for explanation
- Rail refers to metro, urban rail, tram etc
- Only tick 1 answer (the mode used for the longest stretch of this trip segment)
- For each segment of the trip note a separate answer

Question 6A

“Have you used a taxi in the last 6 months?”

- Yes No

Indicative simplified baseline and monitoring methodologies
for selected small-scale CDM project activity categories

III.U. Cable Cars for Mass Rapid Transit System (MRTS)(cont)

If the passenger responds with No this specific questionnaire is deemed as non-consistent and removed from the final counting

Question 6B

“Do you or your family own a car or do you have access to a car (e.g. car-sharing) or have you used a passenger car in the last 6 months?”

Yes No

If the passenger responds with No this specific questionnaire is deemed as non-consistent and removed from the final counting

Question 6C

“Do you or your family own a motorcycle or do you have access to a motorcycle or have you used a motorcycle in the last 6 months?”

Yes No

If the passenger responds with No this specific questionnaire is deemed as non-consistent and removed from the final counting

Question 6D

“Have you used a taxi tri-cycle in the last 6 months?”

Yes No

If the passenger responds with No this specific questionnaire is deemed as non-consistent and removed from the final counting

The project proponent must include the questionnaire as annex to the PDD. The questionnaire is to be reviewed by the DOE. The DOE assesses if the questionnaire is in accordance with the principles (core elements of survey) specified above.