

**CDM-MP63-A07**

## Draft Large-scale Methodology

---

# AM0048: New cogeneration project activities supplying electricity and heat to multiple customers

Version 04.0 – Draft

Sectoral scope(s): 01

DRAFT



**United Nations**  
Framework Convention on  
Climate Change

## COVER NOTE

### 1. Procedural background

1. The Executive Board (hereinafter referred to as the Board) of the clean development mechanism (CDM) at its seventy-second meeting approved the “Workplan for panels and working groups for 2013” wherein it mandated the Methodologies Panel (Meth Panel) to simplify and streamline methodologies and tools under the MAP project no. 120. The purpose is to revise methodologies, taking into account the "Guidelines for determining baselines for measure(s)", with the aim of reducing transaction costs especially those in regions underrepresented in the CDM.
2. During the review of the methodologies for new cogeneration systems “AM0014: Natural gas-based package cogeneration” and “AM0048: New cogeneration project activities supplying electricity and heat to multiple customers”, the Meth Panel noted that there is an overlap among the applicability of some existing methodologies for cogeneration systems.
3. In Meth Panel, there is consensus that simplified baseline determination criteria may be proposed in a consolidated manner for the methodologies applicable to cogeneration projects, in line with the approved guideline for determination of baseline for measure(s). During next round of work the revision of AM0058 will follow this consolidated approach for cogeneration methodologies.
4. The appendix to this document contains a flowchart that depicts the consolidated criteria for the baseline determination for methodologies applicable to cogeneration projects. These criteria will be the basis of revision of other cogeneration methodologies.

### 5. Purpose

6. The purpose of the draft revision of AM0048 is to simplify the methodology, in particular the sections of baseline determination and baseline emissions in line with a consolidated approach agreed on cogeneration methodologies.

### 7. Key issues and proposed solutions

8. The draft revision takes into account the “Guidelines for determining baselines for measure(s)” by simplifying and streamlining the methodology for baseline scenario identification, with the aim of reducing transaction costs especially for those in the regions which are underrepresented in the CDM.

### 9. Impacts

10. The revision, if approved will improve its consistency with other standards, expand its applicability and streamline it.

**11. Subsequent work and timelines**

12. The Meth Panel, at its 63<sup>rd</sup> meeting, agreed on the draft revision of the methodology. After receiving public inputs on the document, the Meth Panel will continue working on the revision of the approved methodology, at its 64<sup>th</sup> meeting, for recommendation to the Board at a future meeting of the Board.

**13. Recommendations to the Board**

14. Not applicable (call for public input).

<b>TABLE OF CONTENTS</b>	<b>Page</b>
<b>1. INTRODUCTION .....</b>	<b>6</b>
<b>2. SCOPE, APPLICABILITY, AND ENTRY INTO FORCE .....</b>	<b>6</b>
2.1. Scope .....	6
2.2. Applicability .....	6
2.3. Entry into force .....	6
<b>3. NORMATIVE REFERENCES .....</b>	<b>6</b>
3.1. Selected approach from paragraph 48 of the CDM modalities and procedures .....	7
<b>4. DEFINITIONS .....</b>	<b>7</b>
<b>5. BASELINE METHODOLOGY .....</b>	<b>8</b>
5.1. Project boundary .....	8
5.2. Procedure for the selection of the most plausible baseline scenario and demonstrate additionality .....	8
5.2.1. Identification of alternative scenarios.....	9
5.3. Investment analysis.....	9
5.4. Outcome.....	10
5.5. Baseline emissions.....	10
5.5.1. Emissions for the production of electricity in year $y$ .....	10
5.5.2. Determination of the emission factor for baseline scenario P2 .....	10
5.5.3. Emissions for the production of heat in year $y$ (use of steam or hot water) .....	11
5.5.4. Determination of the emission factor for scenarios H2.....	11
5.5.5. Determination of the reference energy generation facility.....	12
5.6. Project emissions .....	12
5.7. Leakage.....	12
5.8. Emissions reductions .....	12
5.9. Changes required for methodology implementation in 2 <sup>nd</sup> and 3 <sup>rd</sup> crediting periods .....	13
5.10. Project activity under a programme of activities (PoA) .....	13

---

5.11. Data and parameters not monitored .....	13
<b>6. MONITORING METHODOLOGY .....</b>	<b>14</b>
6.1. Data and parameters monitored .....	14
<b>APPENDIX. ....</b>	<b>CONSOLIDATED APPR</b>

## 1. Introduction

**Table 1. Methodology key elements**

<b>Typical projects</b>	Fossil-fuel-fired cogeneration project supplying heat and electricity to multiple project customers
<b>Type of GHG emissions mitigation action</b>	Energy efficiency: Switch to cogeneration of steam and electricity

## 2. Scope, applicability, and entry into force

### 2.1. Scope

1. The scope of methodology covers the projects that implement new fossil-fuel-fired cogeneration facilities.

### 2.2. Applicability

2. This methodology applies to project activities that install a new fossil-fuel-fired cogeneration facility(ies) that supply heat and electricity to: (a) existing and new recipient facilities; and/or (b) electricity generation to grid; and/or (c) heat to heat networks.
3. The following applicability conditions apply:
  - (a) Where the project activity is connected to grid and/or heat network, the geographical/physical boundaries of the grid and/or heat network to which the project activity is connected shall be identified and documented;
  - (b) The heat-to-power ratio of the project cogeneration facility shall be higher than 1.
4. The methodology is only applicable for the following situations:
  - (a) Where the baseline scenario of electricity generation is a construction of a new fossil fuel based electricity generation facility (P2); and
  - (b) Where the baseline scenario for heat generation is a construction of a new fossil-fuel based heat generation facility (H2).
5. In addition, the applicability conditions included in the tool referred to below apply.

### 2.3. Entry into force

6. Not applicable (call for public input).

## 3. Normative references

7. This methodology is based on “NM0141-rev: Displacing grid/off-grid steam and electricity generation with less carbon-intensive fuels”, whose baseline study and project design document were prepared by Quality Tonnes.
8. This methodology also refers to the latest version of the following tool(s):

- (a) “Combined tool to identify the baseline scenario and demonstrate additionality”;
- (b) “Tool to calculate the emission factor for an electricity system”;
- (c) “Upstream leakage emissions associated with fossil fuel use”;
- (d) “Tool to calculate project or leakage CO<sub>2</sub> emissions from fossil fuel combustion”;
- (e) “Assessment of the validity of the original/current baseline and update of the baseline at the renewal of the crediting period”.

### 3.1. Selected approach from paragraph 48 of the CDM modalities and procedures

- 9. “Emissions from a technology that represents an economically attractive course of action, taking into account barriers to investment”.

## 4. Definitions

- 10. The definitions contained in the Glossary of CDM terms shall apply.

- 11. The following definitions apply for this methodology:

- (a) **Project facility** – a new fossil-fuel-based cogeneration facility established through investment as CDM project activity that is either a new construction with no operational history or has less than one year of operational history immediately prior to the start date of the project activity developed to generate and supply electricity and/or heat directly to recipient facility(ies) and/or to the grid or heat network;
- (b) **Cogeneration facility** – facility that generates electricity and heat simultaneously by use of fossil fuels;
- (c) **Useful heat** – useful thermal energy that is supplied by a heat carrier (e.g. liquids, gases, steam, etc.) for utilization in thermal applications and processes. Note that the specific useful heat, as defined in this document, refers to the net quantity of thermal energy per unit of mass of heat carrier that is transferred from the working fluid at the consumer’s facility. It refers to the difference of the specific enthalpy of the steam supplied to the consumer and the specific enthalpy of the condensate return. For simplicity, when there is no information about the consumer and the rate of condensate return, the useful heat will be defined as the difference of the enthalpy of the steam generated in the boiler and the enthalpy of the feed water;
- (d) **Heat** - thermal energy that is generated in a heat generation facility (e.g. a boiler, a cogeneration plant, thermal solar panels, etc.) and transferred to a heat carrier (e.g. liquids, gases, steam, etc.) for utilization in thermal applications and processes. Note that the specific heat, as defined in this document, refers to the net quantity of thermal energy per unit of mass of heat carrier that is generated in the project facility. For example, in case of a boiler it refers to the difference of the specific enthalpy of the steam generated in the boiler and the specific enthalpy of the feed water;

- (e) **Heat network** – the spatial extent of the heat generation facilities that are physically connected through heating pipeline (e.g. pipeline network that supplies heat to several recipient facility(ies)) where project heat can be dispatched in this network without transmission constraints;
- (f) **Power grid** – is defined by the spatial extent of the power plants that are physically connected through transmission and distribution lines to the project activity (e.g. the cogeneration plant location or the recipient facility(ies) where electricity is consumed) and that can be dispatched without significant transmission constraints;
- (g) **Reference energy generation facility** - the most plausible facility generating the useful energy (power or heat), in absence of energy available from the proposed CDM project. The reference energy generation facility should be identified through economic analysis (including benchmark (e.g. IRR/NPV) analysis, cost-benefit analysis, or analysis of levelised cost of energy), subject to assessment of availability of such source. The reference energy generation facility should also be demonstrated to be commonly used in the relevant industry sector of the host country.

## 5. Baseline methodology

### 5.1. Project boundary

12. The spatial extent of the project boundary encompasses:
- (a) The project facility;
- (b) The grid and/or heat networks to which the project supplies energy.
13. The greenhouse gases included in or excluded from the project boundary are shown in Table 2 below.

**Table 2. Emission sources included in or excluded from the project boundary**

Source		Gas	Included	Justification/Explanation
Baseline	Combustion of fossil fuels to produce heat and electricity at the project customers and at the grid	CO <sub>2</sub>	Yes	Main emission source in the combustion of fossil fuels
		CH <sub>4</sub>	No	Excluded for simplification
		N <sub>2</sub> O	No	Excluded for simplification
Project activity	Combustion of fossil fuels to produce heat and electricity at the project facility(s)	CO <sub>2</sub>	Yes	Main emission source in the combustion of fossil fuels
		CH <sub>4</sub>	No	Excluded for simplification
		N <sub>2</sub> O	No	Excluded for simplification

### 5.2. Procedure for the selection of the most plausible baseline scenario and demonstrate additionality

14. Project proponents shall apply the latest approved version of the “Combined tool to identify the baseline scenario and demonstrate additionality” (hereafter referred as the



“combined tool”) to identify the baseline scenario among all reasonable potential alternative scenarios that could provide similar services as the proposed project activity with the following additional guidance.

### **5.2.1. Identification of alternative scenarios**

15. Examine the baseline scenario for the project proponents as per Sub-step 1a where the alternative scenarios should include all realistic and credible alternatives available to the project participants for the project activity that are consistent with current laws and regulations of the host country. All the alternatives shall include different technologies but the same fuel that project activity intends to implement.
16. For the proposed project activity, the potential alternative scenarios shall be determined separately for:
  - (a) Electricity generation; and
  - (b) Heat generation.
17. However, alternatives to the project activity should also include the scenario for the construction and operation of new cogeneration plant for electricity generation but using different technology.
18. The project proponent shall conduct the below analysis to establish the relevant electricity and heat alternatives for the project activity including the technology and related efficiency.
19. For electricity generation, the realistic and credible alternative(s) may include, inter alia:
  - (a) P1: The project activity not implemented as a CDM project;
  - (b) P2: Construction and operation of a new electricity generation facility using the same fuel as that used by project activity;
20. For generation of heat, the realistic and credible alternative(s) may include, inter alia:
  - (a) H1: The project activity not implemented as a CDM project;
  - (b) H2: Construction and operation of new fossil fuel based heat generation facility using the same fuel as that used by project activity.

### **5.3. Investment analysis**

21. Apply an investment comparison analysis, as per Step 3 of the combined tool if more than one alternative is remaining after Step 1.
22. An integrated investment analysis combining the baseline scenarios for heat and electricity shall be performed to determine the baseline scenario. Although through the above steps alternatives may be identified separately for power generation and heat generation, the economic comparison of the baseline scenario alternatives should be performed on the basis of the total cost to generate the total amount of electricity and heat to be provided by the project facility.
23. For investment analysis a levelized cost comparison shall be performed between the various alternatives available to the project participant. Project participants shall apply

same price for power and heat generation between various alternatives and maintain a similar heat to power ratio amongst the compared alternatives.

#### 5.4. Outcome

24. The methodology is applicable if the above procedure results in the following alternatives as the most plausible baseline scenarios:

- (a) Where the baseline scenario of electricity generation is P2;
- (b) Where the baseline scenario for heat generation is H2.

#### 5.5. Baseline emissions

25. The baseline emissions are sum of emissions from generation of electricity and emissions from generation of heat:

$$BE_y = BE_{EL,y} + BE_{HT,y} \quad \text{Equation (1)}$$

Where:

- $BE_y$  = Baseline emissions in year  $y$  (t CO<sub>2</sub>)
- $BE_{EL,y}$  = Baseline emissions from electricity generation in year  $y$  (t CO<sub>2</sub>)
- $BE_{HT,y}$  = Baseline emissions from heat generation in year  $y$  (t CO<sub>2</sub>)

##### 5.5.1. Emissions for the production of electricity in year $y$

$$BE_{EL,y} = EL_{PJ,y} \times EEF_{BL} \quad \text{Equation (2)}$$

Where:

- $EL_{PJ,y}$  = Electricity supplied by the project facility in year  $y$  (MWh)
- $EEF_{BL}$  = Baseline CO<sub>2</sub> emission factor for electricity of the reference energy generation facility (t CO<sub>2</sub>/MWh)

26. The baseline CO<sub>2</sub> emission factor for electricity is calculated as below.

##### 5.5.2. Determination of the emission factor for baseline scenario P2

$$EEF_{BL} = \frac{EF_{P,CO_2} \times 3.6}{\eta_{P,ref}} \quad \text{Equation (3)}$$

Where:

- $EF_{P,CO_2}$  = CO<sub>2</sub> emission factor of fuel type of the project facility that represents power generation facility (t CO<sub>2</sub>/TJ)
- $\eta_{P,ref}$  = Average net energy conversion efficiency of the technology of the reference energy generation facility for power generation (ratio)

**Note:** For calculation of baseline emissions it is assumed in this methodology that the baseline fossil fuel is the same as that used by project facility.

27. The efficiency  $\eta_{P,ref}$  shall be determined by identification of a reference energy generation facility. The efficiency of the reference energy generation facility is determined as:
- Highest of the efficiency values provided by two or more reputed suppliers/manufacturers for the technology of the reference power plant; or
  - Assume a power generation efficiency of 60 per cent as a conservative approach.

### 5.5.3. Emissions for the production of heat in year $y$ (use of steam or hot water)

#### 5.5.3.1. Steam or hot water

28. It is assumed that steam or hot water is produced at constant temperature and pressure.

$$BE_{HT,y} = SC_{PJ,y} \times SEF_{BL} \quad \text{Equation (4)}$$

Where:

- $SC_{PJ,y}$  = Steam or hot water supplied by the project facility in year  $y$  (TJ)  
 $SEF_{BL}$  = Baseline CO<sub>2</sub> emission factor for steam or hot water of their reference energy generation facility (t CO<sub>2</sub>/TJ)

29. The baseline CO<sub>2</sub> emission factor for steam or hot water is calculated as below.

#### 5.5.4. Determination of the emission factor for scenarios H2

$$SEF_{BL} = \frac{EF_{H,CO_2,i}}{\eta_{H,ref}} \quad \text{Equation (5)}$$

Where:

- $EF_{H,CO_2,i}$  = CO<sub>2</sub> emission factor of fuel type of the project facility that represents heat generation facility (t CO<sub>2</sub>/TJ)  
 $\eta_{H,ref}$  = Average net energy conversion efficiency of the of the technology of the reference energy generation facility for heat generation (ratio)

**Note:** For calculation of baseline emissions it is assumed in this methodology that the baseline fossil fuel is the same as that used by project facility.

30. The efficiency  $\eta_{H,ref}$  shall be determined by identification of a reference energy generation facility. The efficiency of the reference energy generation facility is determined as:
- Highest of the efficiency values provided by two or more reputed suppliers/manufacturers for the technology of the reference power plant; or

- (b) Assume a power generation efficiency of 100 per cent as a conservative approach.

### 5.5.5. Determination of the reference energy generation facility

31. Project proponent in the determination of the reference energy generation facility shall:
- (a) Submit an alternative design for the power generation and heat generation separately for the capacity that will be displaced under the project activity;
  - (b) Demonstrate through investment analysis that such alternative design would have been the baseline scenario for the power generated and heat generated in the Greenfield facility;
  - (c) This alternative design provides the technology and fuel referred above.

### 5.6. Project emissions

32. To calculate the project emissions from the combustion of fossil fuels to produce heat and electricity at the project facility(s) ( $PE_y$ ), apply the latest approved version of the “Tool to calculate project or leakage  $CO_2$  emissions from fossil fuel combustion”. The parameter  $PE_y$  corresponds to  $PE_{FC,j,y}$  in the tool, where  $j$  are the processes that fire fossil-fuels attributable to the project activity.

### 5.7. Leakage

33. Leakage may result from the extraction, processing, liquefaction, transportation, re-gasification and distribution of fossil fuels outside of the project boundary. This includes mainly fugitive  $CH_4$  emissions and  $CO_2$  emissions from associated fuel combustion and flaring. In this methodology, the following leakage emission sources shall be considered:
- (a) Fugitive  $CH_4$  emissions associated with the extraction, processing, liquefaction, transportation, re-gasification and distribution of fossil fuels used in the project plant and fossil fuels used in the grid in the absence of the project activity;
  - (b) In the case liquefied natural gas (LNG) is used in the project plant:  $CO_2$  emissions from fuel combustion/electricity consumption associated with the liquefaction, transportation, re-gasification and compression into a natural gas transmission or distribution system.
34. Leakage shall be determined as per the provisions of the latest version of the tool “Upstream leakage emissions associated with fossil fuel use”.

### 5.8. Emissions reductions

35. The emissions reductions are calculated as:

$$ER_y = BE_y - PE_y - LE_y \quad \text{Equation (6)}$$

## 5.9. Changes required for methodology implementation in 2<sup>nd</sup> and 3<sup>rd</sup> crediting periods

36. Refer to the latest approved version of the methodological tool “Assessment of the validity of the original/current baseline and update of the baseline at the renewal of the crediting period”.

## 5.10. Project activity under a programme of activities (PoA)

37. Refer to the latest approved version of the standard for “Demonstration of additionality, development of eligibility criteria and application of multiple methodologies for programme of activities”.

## 5.11. Data and parameters not monitored

Data / Parameter table 1.

<b>Data / Parameter:</b>	$EF_{P,CO_2,i}$ , $EF_{H,CO_2,i}$	
Data unit:	t CO <sub>2</sub> /TJ	
Description:	CO <sub>2</sub> emission factor of the fuel used in the reference energy generation facility that represents the power generation facility. CO <sub>2</sub> emission factor of fuel used in the reference energy generation facility that represents the heat generation facility	
Source of data:	The following data sources may be used if the relevant conditions apply:	
	<b>Data source</b>	<b>Conditions for using the data source</b>
	(a) Values provided by the fuel supplier in invoices	This is the preferred source
	(b) Measurements by the project participants	If (a) is not available
	(c) Regional or national default values	If (b) is not available  These sources can only be used for liquid fuels and should be based on well-documented, reliable sources (such as national energy balances)
	(d) IPCC default values at the lower limit of the uncertainty at a 95 per cent confidence interval as provided in table 1.4 of Chapter1 of Vol. 2 (Energy) of the 2006 IPCC Guidelines on National GHG Inventories	If (c) is not available

Measurement procedures (if any):	For (a) and (b): measurements should be undertaken in line with national or international fuel standards
Any comment:	For (a): if the fuel supplier does provide the NCV value and the CO <sub>2</sub> emission factor on the invoice and these two values are based on measurements for this specific fuel, this CO <sub>2</sub> factor should be used. If another source for the CO <sub>2</sub> emission factor is used or no CO <sub>2</sub> emission factor is provided, options (b), (c) or (d) should be used

## 6. Monitoring methodology

38. Describe and specify in the CDM-PDD all monitoring procedures, including the type of measurement instrumentation used, the responsibilities for monitoring and quality assurance and quality control procedures that shall be applied. Where the methodology provides difference options (e.g. use of default values or on-site measurements), specify which option shall be used. All meters and instruments should be calibrated regularly as per industry practices.
39. All data collected as part of monitoring should be archived electronically and be kept at least for two years after the end of the last crediting period. One hundred per cent of the data should be monitored if not indicated differently in the comments in the tables below.

### 6.1. Data and parameters monitored

Data / Parameter table 2.

Data / Parameter:	EL <sub>PJ,y</sub>
Data unit:	MWh
Description:	Amount of electricity generated in the cogeneration facility and supplied to either project customers and/or grid in year y
Source of data:	Measured by project participants using electricity meters
Measurement procedures (if any):	On-site measurements
Monitoring frequency:	Continuously
QA/QC procedures:	-
Any comment:	-

Data / Parameter table 3.


Data / Parameter:	SC <sub>PJ,y</sub>
Data unit:	TJ
Description:	Amount of heat generated in the cogeneration facility and supplied to either project customers and/or heat networks
Source of data:	On-site measurements

Measurement procedures (if any):	This parameter should be determined as the difference of the enthalpy of the process heat (steam or hot water) supplied to process heat loads in the project activity minus the enthalpy of the feed-water, the boiler blow-down and any condensate return to the heat generators. The respective enthalpies should be determined based on the mass (or volume) flows, the temperatures and, in case of superheated steam, the pressure. Steam tables or appropriate thermodynamic equations may be used to calculate the enthalpy as a function of temperature and pressure
Monitoring frequency:	Calculated based on continuously monitored data and aggregated as appropriate, to calculate emissions reductions
QA/QC procedures:	-
Any comment:	-

-----

DRAFT

## Appendix. Consolidated approach for baseline determination for methodologies applicable to cogeneration project activities<sup>1</sup>

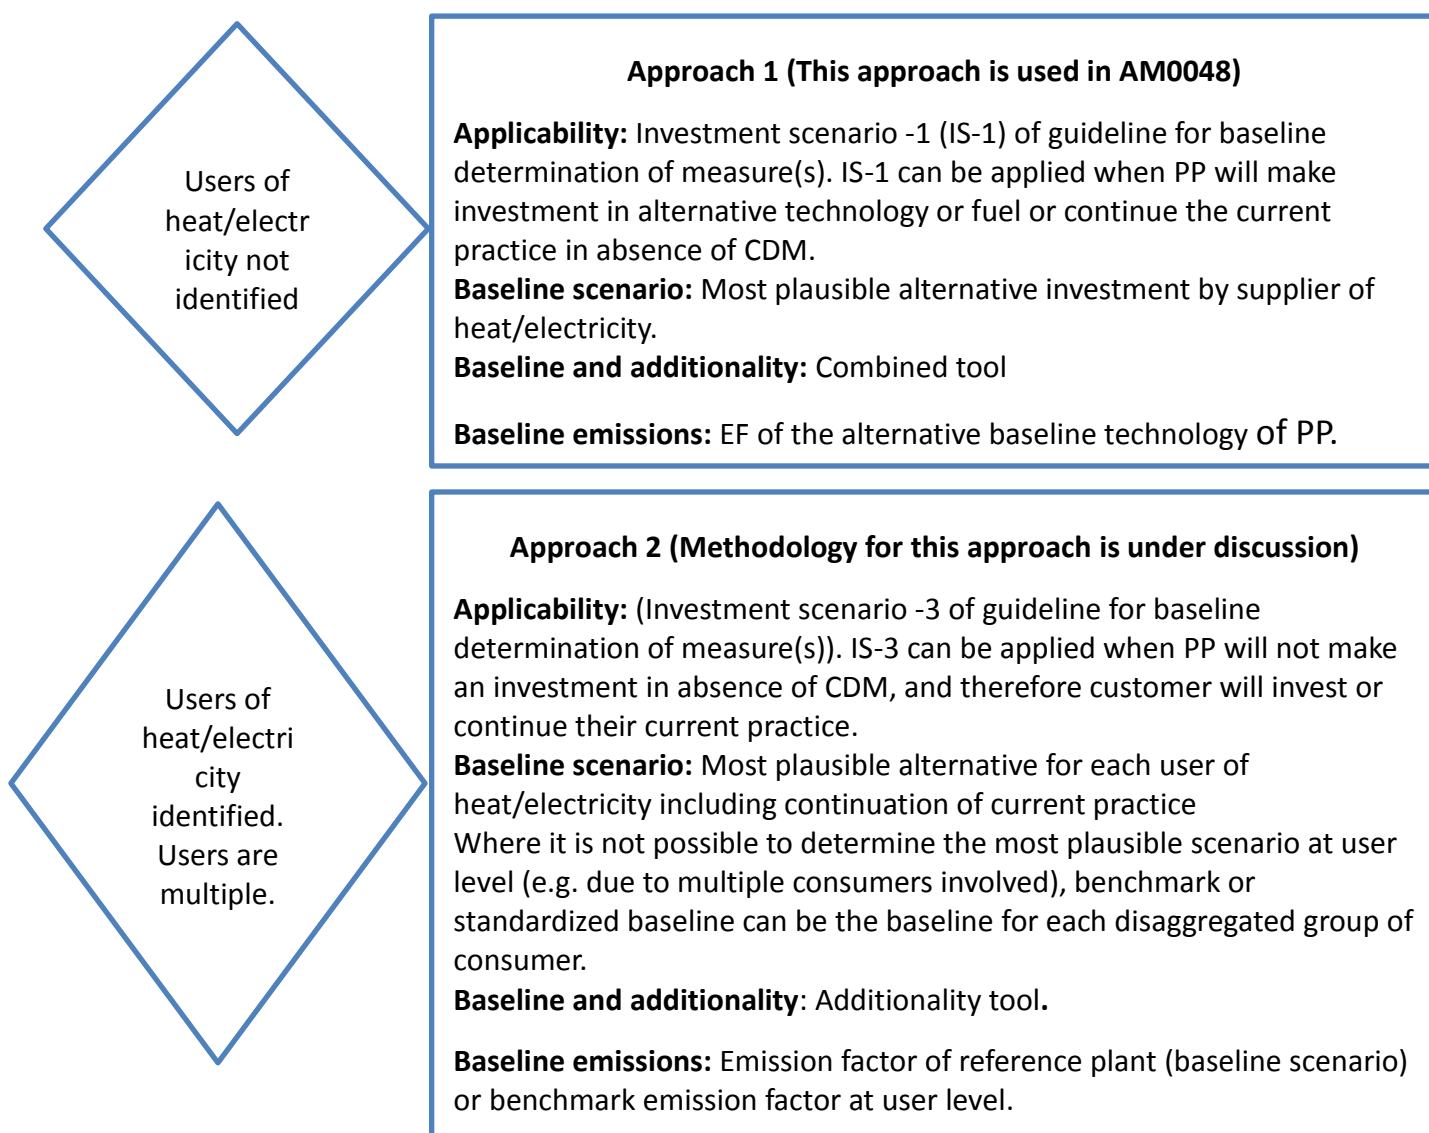

---

<sup>1</sup> The approaches are designed in accordance with approved "guidelines for determining baselines for measure(s)". These guidelines are available at <<http://cdm.unfccc.int/Reference/Guidclarif/index.html>>.



- - - - -

## Document information

<i>Version</i>	<i>Date</i>	<i>Description</i>
Draft 04.0	9 May 2014	<p>MP 63, Annex 7</p> <p>A call for public input will be issued on this draft revised methodology.</p> <p>The revision (i) simplifies and streamlines the methodology, and (ii) changes the title from “New cogeneration project activities supplying electricity and heat to multiple costumers” to “New cogeneration project activities supplying electricity and heat to multiple customers”.</p> <p>Due to the overall modification of the document, no highlights of the changes are provided.</p>
03.1	20 July 2012	<p>EB 68, Annex 9</p> <p>Amendment to: (i) broaden the applicability of the methodology, by including calculations for the baseline emissions for projects that generate hot water; (ii) implement several editorial corrections; and (iii) change the title from “New cogeneration facilities supplying electricity and/or heatsteam to multiple customers and displacing grid/off-grid steam heat and electricity generation with more carbon-intensive fuels” to “New cogeneration project activities supplying electricity and heat to multiple costumers”.</p>
03.0	12 February 2010	<p>EB 52, Annex 6</p> <p>Revision to (i) incorporate the “Tool to calculate project or leakage CO<sub>2</sub> emissions from fossil fuel combustion”, and (ii) correct an error in the units of equations (22) and (23).</p>
02.0	19 October 2007	<p>EB 35, Para 24</p> <p>Revision to incorporate the use of the “Tool to calculate the emission factor for an electricity system”.</p>
01.0	4 May 2007	<p>EB 31, Annex 2</p> <p>Initial adoption.</p>
<p>Decision Class: Regulatory  Document Type: Standard  Business Function: Methodology  Keywords: cogeneration, energy efficiency, power plants , steam generation</p>		